



RDCK FLOODPLAIN AND STEEP CREEK STUDY

Burton Creek

Final
March 31, 2020

BGC Project No.:
0268007

BGC Document No.:
RDCK2-CW-002F

Prepared by BGC Engineering Inc. for:
Regional District of Central Kootenay



TABLE OF REVISIONS

ISSUE	DATE	REV	REMARKS
DRAFT	March 5, 2020		Draft issue.
FINAL	March 31, 2020		Final issue.

LIMITATIONS

BGC Engineering Inc. (BGC) prepared this document for the account of Regional District of Central Kootenay. The material in it reflects the judgment of BGC staff in light of the information available to BGC at the time of document preparation. Any use which a third party makes of this document or any reliance on decisions to be based on it is the responsibility of such third parties. BGC accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this document.

As a mutual protection to our client, the public, and ourselves, all documents and drawings are submitted for the confidential information of our client for a specific project. Authorization for any use and/or publication of this document or any data, statements, conclusions or abstracts from or regarding our documents and drawings, through any form of print or electronic media, including without limitation, posting or reproduction of same on any website, is reserved pending BGC's written approval. A record copy of this document is on file at BGC. That copy takes precedence over any other copy or reproduction of this document.

EXECUTIVE SUMMARY

This report and its appendices provide a detailed flood hazard assessment of the Burton and Caribou Creeks near the settlement of Burton, British Columbia. These creeks were chosen as a high priority clearwater hazard amongst hundreds in the Regional District of Central Kootenay (RDCK) from a risk perspective because of its comparatively high hazards and consequences from flooding. This report describes hydrological conditions and details the methods applied to create scenario and hazard maps for the Burton Creek. This work is the foundation for possible future quantitative risk assessments or conceptualization of mitigation measures such as potential upgrades to existing dikes.

Flood mapping is used for estimating the extent and depth of different magnitude floods for application in community planning, policy development, and emergency response planning in areas subject to flood hazards. Results from a two-dimensional (2D) hydraulic model developed for about a 5.3 km and 4.8 km length of the Burton and Caribou Creeks provides potential flood inundation extents and establishes flood construction levels (FCLs) based on both the 20- and 200-year return period event or annual exceedance probability (AEP) of 0.05% and 0.5%, and includes a freeboard allowance for planning purposes.

The following types of maps were produced for the Burton Creek:

- Flood depth, velocity and intensity maps for the 20-, 50-, 100-, 200- and 500-year return period events
- Designated floodplain maps depicting the 200-year flood levels including a freeboard allowance 0.6 m (200-year)
- Aerial photograph interpretation and channel change mapping.

This is the first flood mapping study to take place on either the Burton or Caribou Creeks. Implementation of the Burton Creek FCLs and community planning for development outside of high hazard areas and will lead to greater flood resiliency within the settlement of Burton. Flood mapping results are also provided digitally through a BGC Engineering Inc. (BGC) web application called Cambio™.

Channel change mapping conducted by BGC indicates that the Burton and Caribou Creeks channel are highly dynamic, indicating that the flood hazard assessment and modelling should be updated over time. Furthermore, the assumptions made on changes in runoff due to climate change will likely need to be updated periodically as scientific understanding evolves.

Table E-1 provides key observations derived from the hazard assessment.

Table E-1. Summary of key hazard assessment results.

Process	Key Observations
Bank erosion and channel changes	<ul style="list-style-type: none"> • Aerial photograph interpretation and channel change mapping results indicate that the identified channel reaches have experienced bank retreatment resulting in lateral migration and deposition over the reviewed period (1978-2019). The floodplain is laterally unstable and prone to avulsions. High flows have the potential to exacerbate these existing processes as the channel bed remobilizes.
Clear-water inundation	<ul style="list-style-type: none"> • The flooding along Burton and Caribou creeks is generally constrained to the channel and immediate floodplains for the range of scenarios considered. • The velocities in the main channels are very fast due to the steep gradients of the creeks. • In areas where anabranching is present on Burton, Snow, and Caribou Creeks, the flow paths are complex. • The backwater effects from the water levels in Lower Arrow Lake are minimal due to the steep gradients of the creeks. • The Caribou Creek channel hydraulics were more sensitive to the selection of a Manning's n roughness coefficient than Burton Creek (see Appendix E).
Hydraulic Structures (Bridges)	<ul style="list-style-type: none"> • The flood elevations for all scenarios modeled did not reach the lower chord of the three bridges considered in this study as verified through 1D modelling. • There is approximately 3.74 m of clearance between the lower chord of the Highway 6 bridge and the 200-year return period flood. • There is approximately 1.63 m of clearance between the lower chord of the McCormack Road bridge and the 200-year return period flood. • There is approximately 0.74 m of clearance between the lower chord of the bridge on the Private Access Road and the 200-year return period flood.

TABLE OF CONTENTS

TABLE OF REVISIONS	i
LIMITATIONS	i
TABLE OF CONTENTS	iv
LIST OF TABLES	v
LIST OF FIGURES	vi
LIST OF APPENDICES	vi
LIST OF DRAWINGS	viii
1. INTRODUCTION.....	1
1.1. Scope of Work	4
1.2. Terminology.....	5
1.3. Deliverables	5
1.4. Study Team.....	5
2. STUDY AREA CHARACTERIZATION.....	7
2.1. Physiography	7
2.2. Alluvial Fan and Floodplain Morphology	8
2.3. Hydroclimatic Conditions.....	9
2.4. Climate Change Impacts	11
2.5. Glacial History and Surficial Geology	11
3. SITE HISTORY	12
3.1. Area Development.....	12
3.2. Historical Flood Events	13
3.3. Hydraulic Structures	15
3.4. Previous Mitigations	17
3.5. Bank Erosion and Avulsion History	18
4. METHODS	19
4.1. Field Data, Topographic Data and River Bathymetric Surveys	19
4.1.1. Fieldwork and Site Investigations	19
4.1.2. Topographic Mapping	19
4.1.3. Ground and Bathymetric Surveying.....	21
4.1.3.1. Survey Equipment, Accuracy and Processing Software	22
4.1.4. Terrain Creation.....	22
4.2. Channel Change and Bank Erosion Analysis.....	23
4.2.1. Data Sources	23
4.2.2. Limitations and Uncertainties.....	26
4.3. Hydrological Analysis.....	26
4.3.1. Flood Frequency Analysis.....	26
4.3.2. Lower Arrow Lake Reservoir Levels	27
4.3.3. Climate Change Considerations	27
4.4. Hydraulic Modelling	28
4.4.1. General Approach.....	28

4.4.2.	Model Inputs	28
4.4.2.1.	Terrain Model	29
4.4.2.2.	Model Domain and Boundary Conditions	29
4.4.2.3.	Development of Flooding Scenarios.....	30
4.5.	Hazard Mapping	31
4.5.1.	Hazard Scenario Maps	31
4.5.2.	Flood Construction Level Mapping	32
5.	RESULTS	33
5.1.	Channel Change Mapping and Bank Erosion.....	33
5.1.1.	Caribou Creek.....	33
5.1.2.	Burton Creek.....	33
5.2.	Hydrological Modelling.....	38
5.2.1.	Historical Peak Discharge Estimations	38
1.1.1.	Accounting for Climate Change	38
5.2.2.	Flood Scenarios	38
5.3.	Hydraulic Modelling	40
5.4.	Flood Hazard Mapping.....	43
5.5.	Flood Construction Level Mapping	43
6.	SUMMARY AND RECOMMENDATIONS	44
6.1.	Flood Hazard Assessment	44
6.1.1.	Channel Change Mapping and Bank Erosion.....	44
6.1.2.	Adjustment for Projected Climate Change.....	44
6.1.3.	Hydraulic Modelling	45
6.1.4.	Flood Hazard Mapping	45
6.2.	Limitations and Uncertainties	45
6.3.	Considerations for Hazard Management	46
6.4.	Recommendations	47
7.	CLOSURE.....	48
	REFERENCES	49

LIST OF TABLES

Table E-1.	Summary of key hazard assessment results.....	iii
Table 1-1.	List of study areas.	1
Table 1-2.	Study team.	6
Table 2-1.	Watershed characteristics of Burton Creek and Caribou Creek.....	7
Table 2-3.	Historical (1961 to 1990) annual climate statistics	9
Table 2-4.	Projected change (RCP 8.5, 2050) from historical (1961 to 1990).....	11
Table 3-1.	Bridge dimensions.....	17
Table 4-1.	Summary of survey equipment.....	22
Table 4-2.	Aerial photographs and satellite imagery used in the analysis.....	23
Table 4-3.	Geomorphic features used for geomorphic floodplain and channel mapping.	24

Table 4-4.	Levels of activity assigned to the geomorphic features.....	25
Table 4-5.	Channel change classes.....	25
Table 4-6.	Return period classes.....	28
Table 4-7.	Summary of numerical modelling inputs.....	29
Table 4-9.	Flow impact force values shown on the flood hazard scenario maps.....	31
Table 5-1.	Channel reaches characterization and average bank retreat.....	34
Table 5-2.	Summary of key changes observed within the analyzed periods.....	35
Table 5-3.	Historical and climate-adjusted peak discharge estimates.....	38
Table 5-4.	Inflows used for Flood Scenario 1 – Burton Creek Flood Scenario.....	39
Table 5-5.	Inflows used for Flood Scenario 2 – Caribou Creek Flood Scenario.....	39
Table 5-6.	Summary of modelling results.....	40

LIST OF FIGURES

Figure 1-1.	Hazard areas prioritized for detailed flood and steep creek mapping.....	3
Figure 1-2.	Federal Flood Mapping Framework (NRCan, 2017).....	4
Figure 2-1.	Burton and Caribou Creek alluvial fans and floodplain.....	8
Figure 2-2.	Historical (1961 to 1990) mean annual precipitation.....	10
Figure 3-1.	The Burton Wharf from the air, during high water.....	12
Figure 3-2.	Clearing in preparation of the coming reservoir flooding.....	13
Figure 3-3.	Summary of recorded flood history, mitigation, and development history.....	14
Figure 3-4.	View looking east of the embankment and bridge along Highway 6.....	15
Figure 3-5.	View from upstream of the Highway 6 bridge looking west.....	16
Figure 3-6.	View from downstream of the McCormack Road bridge.....	16
Figure 3-7.	View from downstream of the Private Access Road bridge.....	17
Figure 4-1.	Lidar coverage for RDCK clear-water flood hazard study sites.....	20
Figure 4-2.	Example of bridge structure features collected.....	21
Figure 4-4.	Burton Creek study area modelling domain.....	30
Figure 5-1.	Channel reaches within the Caribou Creek floodplain.....	36
Figure 5-2.	Channel reaches within the Burton Creek floodplain.....	37
Figure 5-3.	Burton Creek water surface profiles within the extent.....	41
Figure 5-4.	Caribou Creek water surface profiles within the extent.....	42

LIST OF APPENDICES

APPENDIX A	TERMINOLOGY
APPENDIX B	SITE PHOTOGRAPHS
APPENDIX C	HYDROLOGICAL ANALYSIS METHODS
APPENDIX D	CLIMATE CHANGE CONSIDERATIONS
APPENDIX E	HYDRAULIC ASSESSMENT METHODS

LIST OF DRAWINGS

DRAWING 01	SITE LOCATION MAP
DRAWING 02	WATERSHED OVERVIEW MAP
DRAWING 03	SURVEY LOCATIONS
DRAWING 04	AIR PHOTO COMPARISON
DRAWING 05	HISTORICAL CHANNEL CHANGE MAP
DRAWING 06	FLOOD HAZARD MAP
DRAWING 07	FLOOD CONSTRUCTION LEVEL MAP

1. INTRODUCTION

The Regional District of Central Kootenay (RDCK, the District) is located in a mountainous region in southeastern British Columbia (BC) that is subject to damaging floods, which have resulted in impacts to communities and infrastructure. In 2018, RDCK retained BGC Engineering Inc. (BGC) to carry out a regional geohazard risk prioritization study for the District (BGC, March 31, 2019). Supported by National Disaster Mitigation Program (NDMP) Stream 1 funding, the objective of the study was to characterize and prioritize clear-water flood and steep creek (debris-flood and debris-flow) geohazards. Through the regional study, BGC identified and prioritized 427 flood and steep creek hazard areas within the RDCK, of which, six floodplains and ten steep creeks in the District were selected for further detailed assessment (Table 1-1, Figure 1-1).

Table 1-1. List of study areas.

Site Classification	Geohazard Process	Hazard Code	Jurisdiction	Name
Floodplain	Clear-water Flood	340	Village of Salmo and RDCK Electoral Area G	Salmo River
		372	Village of Slocan and RDCK Electoral Area H	Slocan River
		393	Town of Creston	Goat River
		408	RDCK Electoral Area A	Crawford Creek
		375	RDCK Electoral Area K	Burton Creek
		423	Village of Kaslo	Kaslo River
Steep Creek	Debris Flood	212	RDCK Electoral Area F	Duhamel Creek
		252	RDCK Electoral Area F	Kokanee Creek
		248	RDCK Electoral Area D	Cooper Creek
		137	RDCK Electoral Area H	Wilson Creek
		242	RDCK Electoral Area E	Harrop Creek
		95	RDCK Electoral Area K	Eagle Creek
		238	RDCK Electoral Area F	Sitkum Creek
	Hybrid Debris Flood/Debris Flow	116	RDCK Electoral Area E	Procter Creek
		251	RDCK Electoral Area E	Redfish Creek
	Debris Flow	36	RDCK Electoral Area A	Kuskonook Creek

The six clearwater hazard areas were prioritized either for development of new flood maps or modernization of existing historical flood maps. Flood maps provide information on the hazards associated with defined flood events, such as water depth, flow velocity, and the probability of occurrence. These maps are critical decision-making tools for local and regional governments to inform flood mitigation, land use planning, emergency management, and public awareness. Generally, the historical flood maps in the District are at least twenty years out-of-date and lack

consideration of more robust hydraulic models, additional hydrological data, changes in land use such as urban development or the impacts of climate change. In response, updated floodplain mapping was conducted by BGC for each of the six prioritized clearwater hazard areas and provided under separate cover along with digital deliverables through a BGC web application called Cambio™¹.

This report details the approach used by BGC to conduct detailed floodplain mapping for the Burton Creek and the Caribou Creek tributary located near the Town of Burton, BC (Drawing 01). These two creeks discharge into the Lower Arrow Lakes Reservoir which is part of the Columbia River. The two creeks have an approximate combined watershed area of 526 km². Both creeks pose a flood hazard to properties and infrastructure constructed on the adjacent floodplain and low-gradient delta-fan of the river.

No previous flood mapping has been performed on either the Burton Creek or Caribou Creek. A two-dimensional (2D) hydraulic modelling was developed for a 5.3-km of Burton Creek and a 4.8-km length of Caribou Creek using methods described in Section 4. Modelling results described in Section 5 provide estimated flood inundation extents and establishes flood construction levels (FCLs) based on the 200-year return period event or annual exceedance probability (AEP) of 0.5% and includes a freeboard allowance of 0.6 m for planning purposes.

An outcome of the study is an improved basis for community planning, bylaw development, and emergency response planning in developed areas subject to flood hazards, with consideration of climate change. Recommendations are provided in Section 6 and include considerations for next steps from the study such as possible future quantitative risk assessments (QRAs) or conceptualization of mitigation measures such as potential upgrades to existing dikes.

BGC is providing a summary report for the entire assessment, *RDCK Floodplain and Steep Creek Study Summary Report* (referred to herein as the “Summary Report”). Readers are encouraged to read the Summary Report to obtain context about the objectives, scope of work, deliverables, and recommendations of the larger study.

¹ www.cambiocommunities.ca.

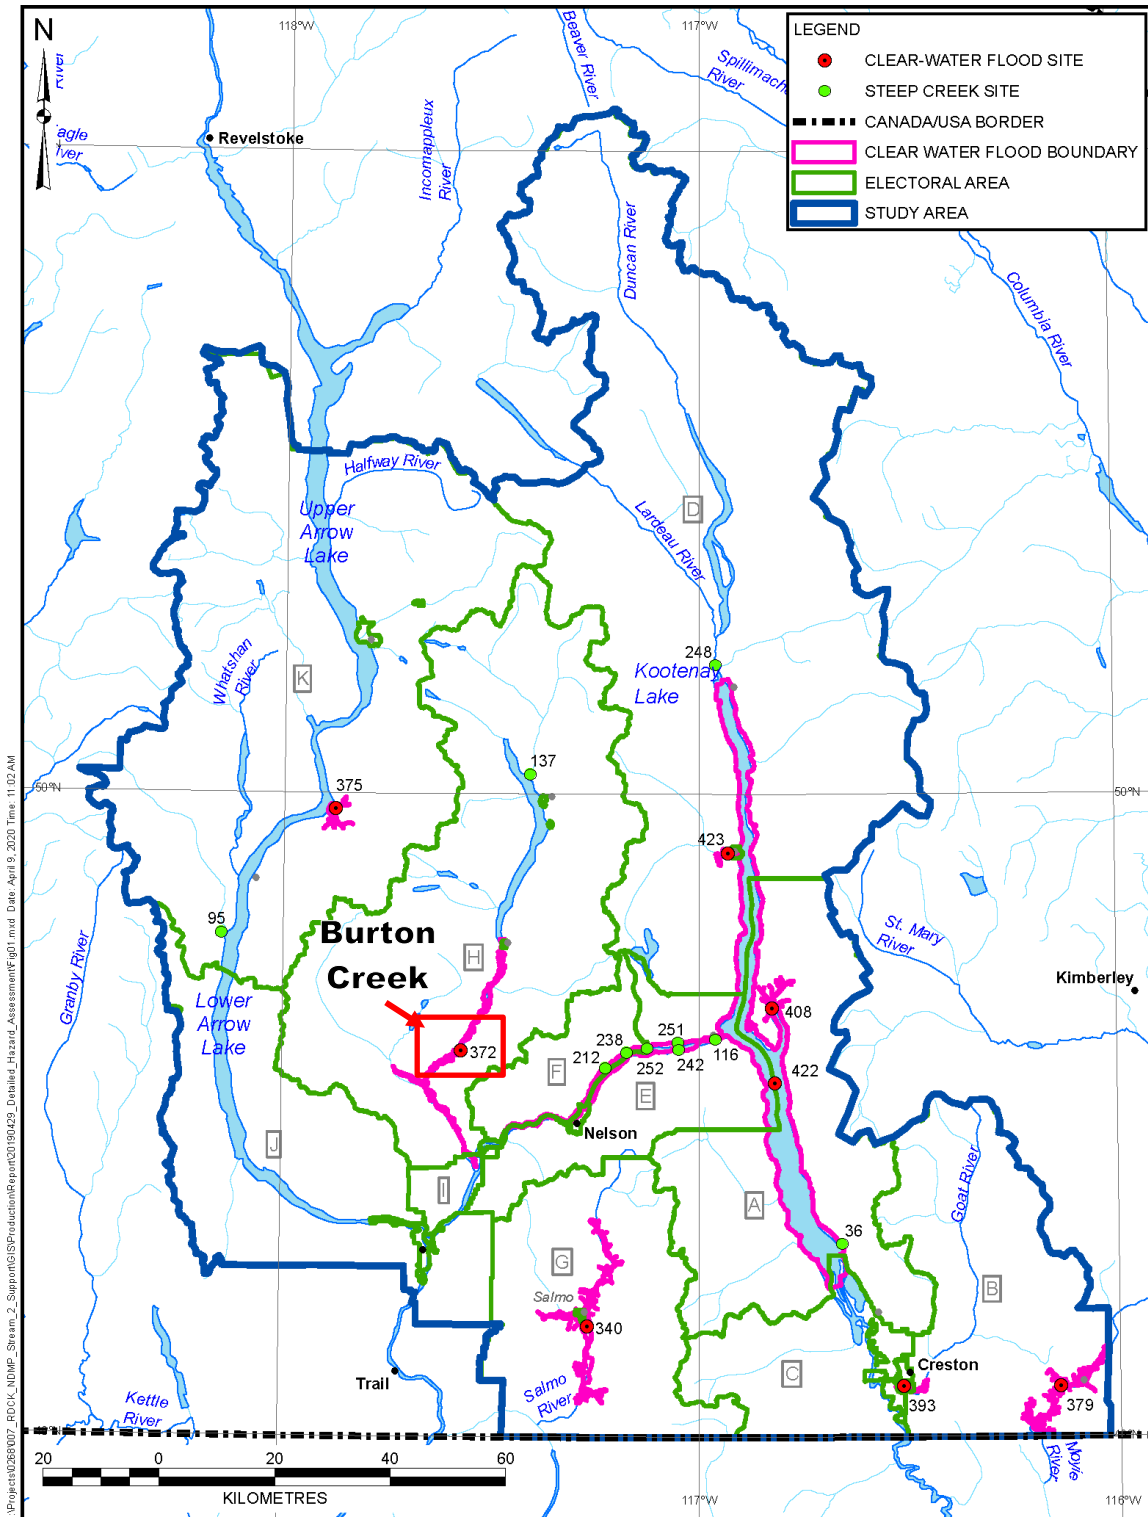


Figure 1-1. Hazard areas prioritized for detailed flood and steep creek mapping. Site labels correspond to hazard identification numbers in Cambio Communities. Burton Creek (No. 375) is labelled on the figure.

1.1. Scope of Work

BGC's scope of work is outlined in the proposed work plan (BGC, May 24, 2019), which was refined to best meet RDCK's needs as the project developed (BGC, November 15, 2019). The work was carried out under the terms of contract between RDCK and BGC dated June 20, 2019. The work scope was funded by Emergency Management BC (EMBC) and Public Safety Canada under Stream 2 of the NDMP.

For the Burton Creek, the scope of work includes:

- Characterization of the study area including regional physiography and hydroclimate, and local watershed characteristics, geology and site characteristics.
- Development of a comprehensive site history of floods and mitigation activity.
- Compilation of data and baseline analyses required as inputs for flood geohazard assessment. This includes topographic and river bathymetry data collection including terrain, hydrologic, hydraulic, fluvial geomorphologic analyses and consideration of climate change impacts.
- Complete hazard mapping and assessment according to provincial and national standards including mapping of inundation areas, flow velocity, and flow depth for a range of return periods.
- Integrate flood mapping results with the regional study and disseminate flood hazard mapping and data in web-accessible formats amenable to incorporation into policy and risk-informed decision making.

The study scope was informed by Engineers and Geoscientists of British Columbia (EGBC, 2018) professional practice guidelines, Legislated Flood Assessments in a Changing Climate in BC, and EGBC (2017) guidelines for flood map preparation. The assessment is consistent with the Federal Floodplain Mapping Framework (Natural Resources Canada [NRCAN], 2017). Within the NRCAN framework, this study provides the foundation to risk assessment and mitigation (Figure 1-2).

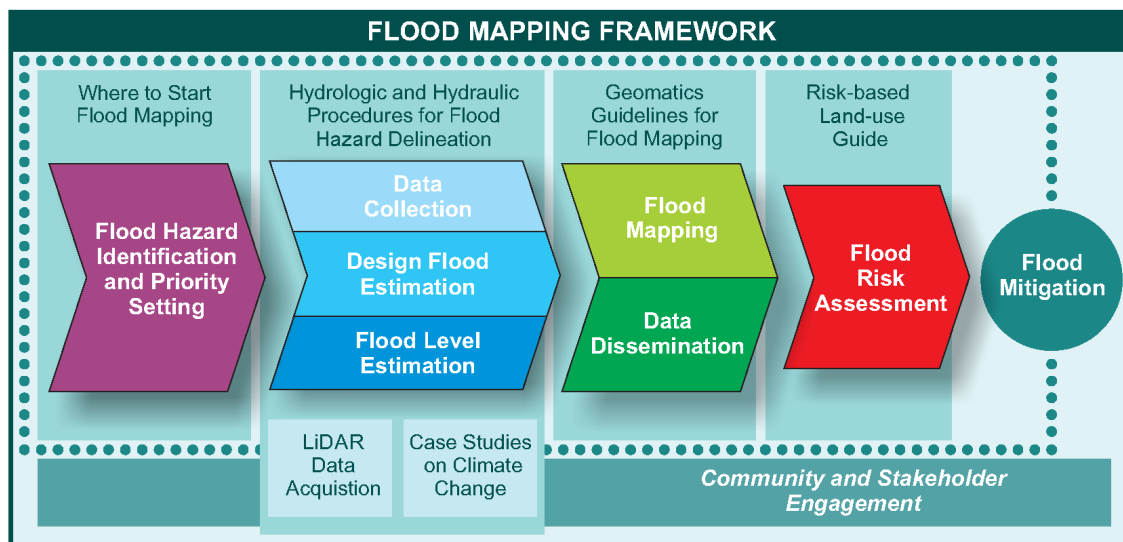


Figure 1-2. Federal Flood Mapping Framework (NRCAN, 2017).

1.2. Terminology

This assessment uses specific hazard terminology provided in Appendix A.

1.3. Deliverables

The deliverables of this study include this assessment report and digital deliverables (hazard maps) provided via the Cambio web application and as geospatial data provided to the RDCK.

This report is best read with access to a web application. Cambio displays the results of both the NDMP Stream 1 and Stream 2 studies. The application can be accessed at www.cambiocommunities.ca, using either Chrome or Firefox web browsers. The Summary Report provides a Cambio user guide.

1.4. Study Team

This study was multidisciplinary. Contributors are listed below, and primary authors and reviewers are listed in Table 1-2.

- Kris Holm, M.Sc., P.Geo., Principal Geoscientist
- Sarah Kimball, M.A.Sc., P.Eng., P.Geo., Senior Geological Engineer
- Rob Millar, Ph.D., P.Eng., P.Geo., Principal Hydrotechnical Engineer
- Hamish Weatherly, M.Sc., P.Geo., Principal Hydrologist
- Betsy Waddington, M.Sc., P.Geo., Senior Geoscientist
- Patrick Grover, M.A.Sc., P.Eng., Senior Hydrotechnical Engineer
- Elisa Scordo, M.Sc., P.Geo., P.Ag., Senior Hydrologist
- Pascal Szeftel, Ph.D., P.Eng., Senior Hydrotechnical Engineer
- Marc Oliver Trottier, M.A.Sc., P.Eng., Intermediate Hydrotechnical Engineer
- Melissa Hairabedian, M.Sc., P.Geo., Senior Hydrologist
- Hilary Shirra, B.A.Sc., EIT, Junior Hydrotechnical Engineer
- Toby Perkins, M.A.Sc., P.Eng., Senior Hydrotechnical Engineer
- Kenneth Lockwood, Ph.D., EIT, Junior Civil Engineer
- Beatrice Collier-Pandya, B.A.Sc., EIT, Geological Engineer
- Matthias Busslinger, M.A.Sc., P.Eng., Senior Geotechnical Engineer
- Carie-Ann Lau, M.Sc., P.Geo., Intermediate Geoscientist
- Phil LeSueur, M.Sc., P.Geo., Geological Engineer
- Lauren Hutchinson, M.Sc., P.Eng., Intermediate Geotechnical Engineer
- Anna Akkerman, B.A.Sc., P.Eng., Senior Hydrotechnical Engineer
- Matthew Buchanan, B.Sc., GISP, A.D.P., GIS Analyst
- Vanessa Cuervo, M.Sc., Geohazard Specialist
- Sophol Tran, B.A., A.D.P., GIS Analyst
- Lucy Lee, B.A., A.D.P., GISP, GIS Analyst/Developer
- Matthew Williams, B.Sc., A.D.P., GIS Analyst.
- Alistair Beck, B.S.F., Dip CST, Database/Web Application Developer
- Michael Porter, M.Eng., P.Eng., Director, Principal Geological Engineer.

Table 1-2. Study team.

Project Director	Kris Holm	
Project Manager	Sarah Kimball	
Overall Technical Reviewer(s)	Rob Millar Hamish Weatherly	
Section	Primary Author(s)	Peer Reviewer(s)
1	Elisa Scordo	Kris Holm
2	Melissa Hairabedian Vanessa Cuervo	Elisa Scordo
3	Patrick Grover Vanessa Cuervo	Melissa Hairabedian
4.1	Patrick Grover	
4.2	Vanessa Cuervo	Betsy Waddington
4.3	Melissa Hairabedian	Elisa Scordo
4.4	Patrick Grover	Marc Oliver Trottier
4.5	Elisa Scordo Patrick Grover	Toby Perkins
5.1	Vanessa Cuervo	Betsy Waddington
5.2	Patrick Grover	
5.3 – 5.5	Patrick Grover	Marc Oliver Trottier
6.0	Patrick Grover Vanessa Cuervo	Melissa Hairabedian
Appendix A	Hilary Shirra	Elisa Scordo
Appendix B	Hilary Shirra	Elisa Scordo
Appendix C	Melissa Hairabedian Patrick Grover	Hamish Weatherly
Appendix D	Melissa Hairabedian Patrick Grover	Hamish Weatherly
Appendix E	Patrick Grover	

2. STUDY AREA CHARACTERIZATION

The following section provides a characterization of the study area including physiography, hydroclimatic conditions and projected impacts of climate change, glacial history and surficial geology, as well as a description of the Burton Creek channel and floodplain.

2.1. Physiography

Burton Creek watershed lies in the Northern Columbia Mountains Ecoregion. This ecoregion is a mountainous area with the Southern Rocky Mountain Trench to the east and the Columbia Highlands to the west. More specifically, the watershed extends across a portion of the Central Columbia Mountains Ecoregion. The Burton Creek headwaters are located in Mount Vingolf, Mount Niord, Mount Meers, Mount Hela, Mount Urd, Mount Bor, Black Prince Mountain, and Woden Peak to the southeast. Burton Creek flows into Arrow Lake reservoir. The upper Arrow Lakes reservoir was formed by damming of the Columbia River. The valleys and lower slopes are dominated by Interior Cedar-Hemlock forests while the middle mountain slopes have an Engelmann Spruce – Subalpine Fir forest. Moist vegetation is present in the alpine with barren rock present in the highest areas (Demarchi, 2011).

The Burton Creek watershed includes the Caribou Creek tributary. The Burton Creek watershed area has a west-north-west orientation with a watershed length of 32 km and is situated to the south of Caribou Creek. The Caribou Creek watershed has a west-south-west orientation with a watershed length of approximately 35 km. Both creeks flow northwest and join at Lower Arrow Lake at the Burton flats which was originally part of the Burton Creek alluvial fan prior to the construction of the causeway and bridge for Highway 6. The combined flow from the Burton and Caribou Creeks join within the bay formed by the causeway, pass under the bridge on Highway 6 and discharge into the Lower Arrow Lake reservoir (Drawing 1). Burton Creek has a watershed area of 290 km² and Caribou Creek has a watershed area of 237 km² for a combined watershed area of 527 km². The watershed boundary for both creeks is presented in Drawing 02 and the physiographic characteristics of the watersheds are listed in Table 2-1.

Table 2-1. Watershed characteristics of Burton Creek and Caribou Creek.

Characteristic	Burton Creek	Caribou Creek
Watershed area (km ²)	290	237
Maximum watershed elevation (m)	2785	2630
Minimum watershed elevation (m)	439	1117
Watershed relief (m)	2346	1513
Watershed centroid elevation (m)	1300	1213
Average channel gradient above the bay within the study area	1.2%	1.3%
Average channel gradient through the bay	0.7%	1.3%

2.2. Alluvial Fan and Floodplain Morphology

Upstream of the Highway 6 bridge, which comprises approximately 6 km of Burton Creek and approximately 4 km of Caribou Creek, is characterized by a wide floodplain, fluvial terraces, and coalescent fans-delta² (Figure 2-1). Burton Creek is generally a gravel wandering channel with irregular channel pattern. The creek flows north through a 300-600 m wide floodplain, which is confined within terraces before it reaches the apex of the fan-delta. The Caribou Creek floodplain is narrower (approximately 350 m wide), and the channel displays a single-thread pattern upstream of the fan-delta apex. Large woody debris jams are influencing channel pattern in the upper section of the channel (approximately 1km upstream of the Wagar road).

The coalescent fans-delta appear to be actively developing from both fluvial and deltaic sedimentation. At the proximal area, the channels are braided, depositing laterals and middle-bars. This deposition is restricted by the causeway and bridge for Highway 6, causing the fan to aggragate. Below the bridge, deltaic sedimentation seems to be more dominant as the channel deposit toes out in the Lower Arrow lake.



Figure 2-1. Burton and Caribou Creek alluvial fans and floodplain.

² Fan delta is a term used to describe alluvial fans that enter in water, a lake, a fjord or an arm of the sea. At these landforms, the geomorphic processes switch from sub-aerial to sub-aqueous, causing a change in depositional slope and in sedimentary style. Sediments from the shoreline might also be integrated into the distal fan sediments (Harvey, 2018).

2.3. Hydroclimatic Conditions

Large-scale airflows moving in from the Pacific Ocean bring moist, marine air to the BC Interior. The Columbia Mountains, lying perpendicular to the prevailing winds, influences the distribution of precipitation and temperatures within the Columbia River watershed. Air masses rising over the Columbia Mountains produce an area of increased precipitation. Precipitation takes the form of rain in the summer and deep snow in the winter. Cold air from the arctic infrequently enters this area because it is protected by mountain ranges from all sides (Demarchi, 2011).

The upper watershed of the Burton Creek rises to a maximum elevation of 2,785 m. This high elevation area has received a maximum historical (1961 to 1990) precipitation of approximately 1900 mm annually. For comparison, the settlement of Burton is located at an elevation of approximately elevation 440 m and has received a maximum historical annual precipitation of approximately 600 mm (Wang et al., 2016).

Averaged across the watershed, the mean annual precipitation (MAP) is 1242 mm, of which approximately 704 mm (57%) is snowfall (precipitation as snow [PAS]) (Table 2-3). The mean annual temperature (MAT) in the watershed is approximately 2.4 °C. The spatial distribution of historical average precipitation, temperature, and snowfall is depicted in Figure 2-2 based on climate data from Wang et al. (2016). Precipitation occurs primarily as snowfall from November to April, and as rain throughout the remainder of the year. Historical precipitation has been highest on average in December and lowest in August.

Table 2-2. Historical (1961 to 1990) annual climate statistics for the Burton Creek watershed and sub-catchments (Wang et al., 2016)

Watershed	Burton at Arrow Lake	Caribou Creek	Snow Creek
Watershed area (km ²)	527	237	290
MAP (mm)	1242	1260	1227
PAS (mm)	704 (57%)	709 (56%)	700 (57%)
MAT (°C)	2.4	2.4	2.3
Mean Winter Precipitation (mm)	428 (34%)	432 (34%)	425 (34%)
Mean Spring Precipitation (mm)	258 (21%)	261 (21%)	255 (21%)
Mean Summer Precipitation (mm)	220 (18%)	226 (18%)	216 (18%)
Mean Fall Precipitation (mm)	336 (27%)	341 (27%)	331 (27%)

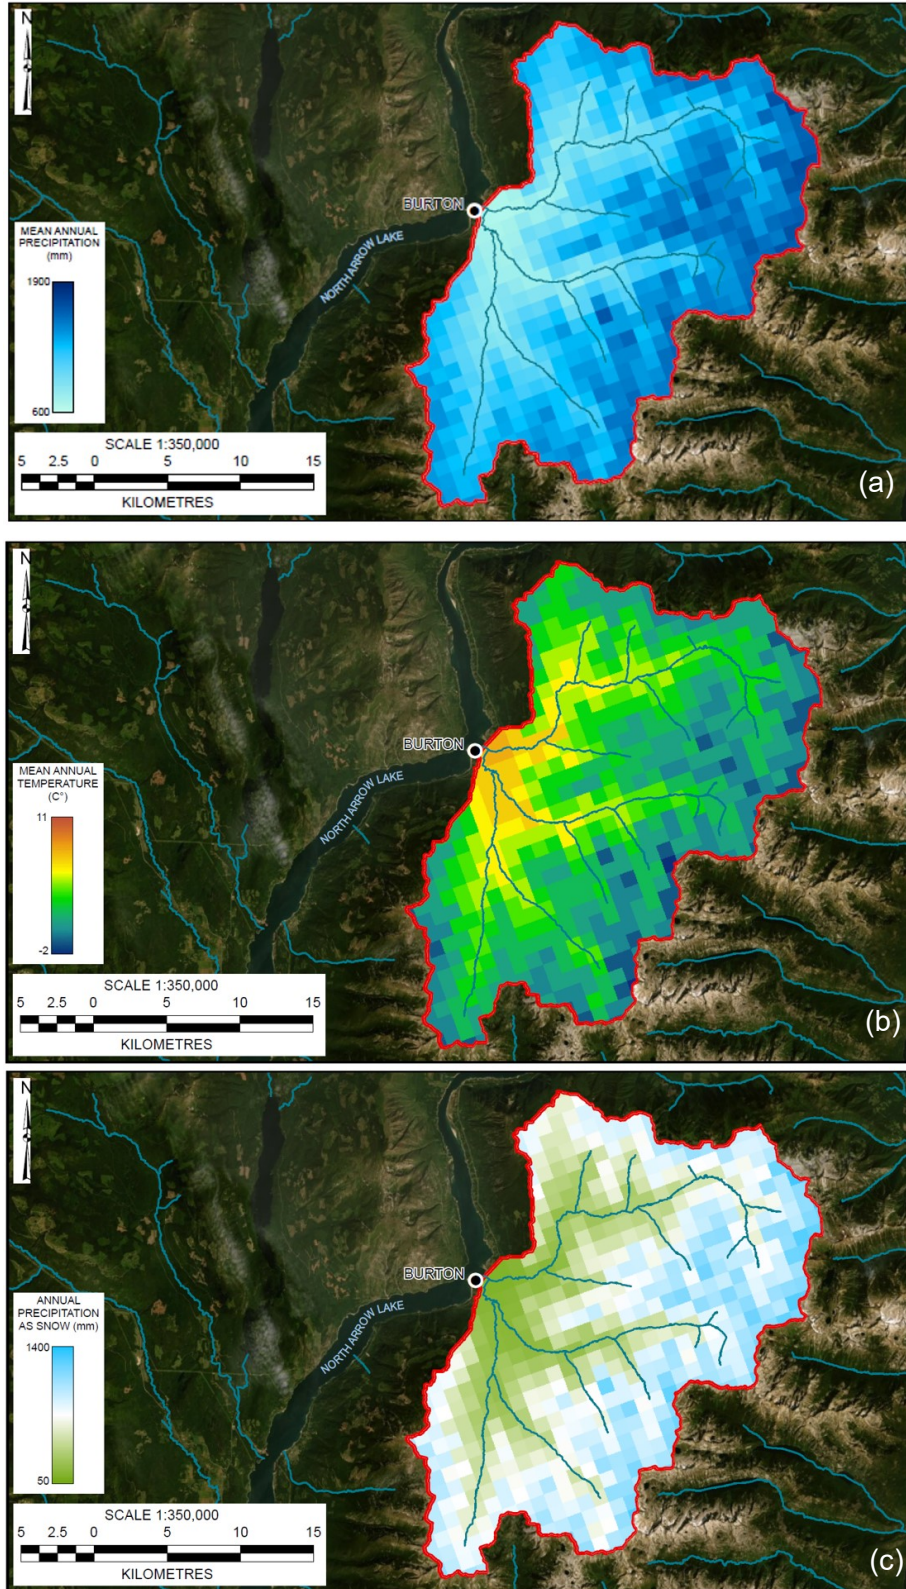


Figure 2-2. Historical (1961 to 1990) mean annual precipitation (MAP) (a), mean annual temperature (MAT) (b), and precipitation as snow (PAS) (c) averaged over the Burton Creek watershed.

2.4. Climate Change Impacts

The MAT in the Burton Creek watershed is projected to increase from 2.4°C (based on historical period 1961 to 1990) to 5.9 °C by 2050 (based on period 2041 to 2070) assuming the representative carbon pathway 8.5 (RCP 8.5). The MAP is projected to increase to 1315 mm while precipitation as snow (PAS) is projected to decrease to 704 mm by 2050 in the Burton Creek watershed. Projected changes in climate variables from historical (1961 to 1990) to 2050 (2041 to 2070) conditions in the Burton Creek watershed are presented in Table 2-4.

Extreme flood events in the Montane Cordillera are often associated with rain-on-snow events in the spring (Harder et al., 2015). Although the effects of climate change on precipitation are not clear, projected increases in temperature are expected to have the largest impact on annual minimum temperatures occurring in the winter (Harder et al., 2015). The effects of temperature change differ throughout the region. High elevation regions throughout parts of the Montane Cordillera (e.g., Upper Columbia River watershed) are projected to experience increases in snowpack, limiting the response in high elevation watersheds while lower elevations are projected to experience a decrease the snowpack (Loukas & Quick, 1999; Schnorbus et al., 2011).

Changes in streamflow vary spatially and seasonally based on snow and precipitation changes and topography-based temperature gradients. Researchers anticipate that streamflow will increase in the winter and spring in this region due to earlier snowmelt and more frequent rain-on-snow events, while earlier peak flow timing is expected in many rivers (Schnorbus et al., 2014; Farjan et al., 2016). Peak flows may increase or decrease depending on the watershed characteristics and the balance of temperature and precipitation changes described above.

Table 2-3. Projected change (RCP 8.5, 2050) from historical (1961 to 1990) conditions for the Burton Creek watershed (Wang et al. 2016)

Climate Variable	Projected Change
MAT	+3.5 °C
MAP	+73 mm
PAS	-221 mm

2.5. Glacial History and Surficial Geology

Between 2 million and 10,000 years ago ice sheets advanced and retreated into the Kootenay region (Turner 2009). The final glaciation which ended approximately 10,000 years ago is responsible for many of the surficial materials in the area. South-flowing glaciers carved deep troughs which now hold Kootenay, Arrow and Slocan Lakes. Ice dammed the lakes during deglaciation. This resulted in lake levels up to approximately 150 m higher than present, and the deposition of silts and clays in isolated terraces near the lake shores. Processes of erosion and deposition have continued since deglaciation creating the younger deposits, such as the fluvial materials found along the streams. Near Burton River, valley sides are bedrock with a thin, discontinuous cover of glacial till and colluvium (Fulton et al., 1984). Fluvial sediments are present in a narrow strip along the river and in the fan. Thicker till is present on lower valley slopes, and a narrow band of glaciolacustrine material has been deposited along the shore of Arrow Lake.

3. SITE HISTORY

3.1. Area Development

The settlement of Burton is an un-incorporated community located directly north of the confluence of the two creeks. Until European contact, Burton was known as "Xaieken", a sizeable year-round village of Sinixt people where they fished and gathered plant foods in the river narrows, between the Arrow Lakes. Built on the alluvial fan, referred to as the Burton Flats, the settlement of Burton was spurred to existence in the late 1890s when placer gold was found in Caribou Creek (Figure 3-1). When the Keenleyside Dam was built on the Columbia River near Castlegar, BC, the land was cleared, and the settlement was relocated to higher ground (Figure 3-2). The relocated settlement was initially referred to as New Burton but this was eventually shortened back to Burton. The present population of Burton based on the 2016 Census was 111 persons within 85 private dwellings (Statistics Canada, 2017).



Figure 3-1. The Burton Wharf from the air, during high water. Photo: Arrow Lakes Historical Society.



Figure 3-2. Clearing in preparation of the coming reservoir flooding. Photo: Arrow Lakes Historical Society (n.d.).

3.2. Historical Flood Events

Limited historical flood events have been recorded in the Burton and Caribou Creeks. The most recent recorded flooding on Burton Creek was in 2007 and was attributed to logging activity in the watershed (FLNRORD, 2017). Other flooding events have been attributed to periods of high-water levels on Lower Arrow Lake during spring and early summer runoff as well as regulation through the Keenleyside Dam at Castlegar (discharge) and the Revelstoke Dam (inflow).

The provincial floodplain mapping program began in BC in 1974 aimed at identifying flood risk areas. This was in part due to the large Fraser River flood of 1972, which resulted in damage in the BC Interior. From 1975 to 2003, the province managed development in designated floodplain areas under the Floodplain Development Control Program. In 2003, the Program ended resulting in a significant change in how MFLNRO participated in land use regulation in flood-prone areas. The responsibility for developing and applying floodplain mapping tools was transferred to local governments, with the requirement that provincial guidelines be taken into consideration (EGBC 2017). Figure 3-3 provides a timeline summary of floods, mitigation and development history along Burton Creek and the surrounding area. The historical event inventory is based upon a variety of sources including newspaper articles, government records and consulting reports. Some sources may not be completely accurate or only provide partial records of flood events but are provided to present an overview of historic events.

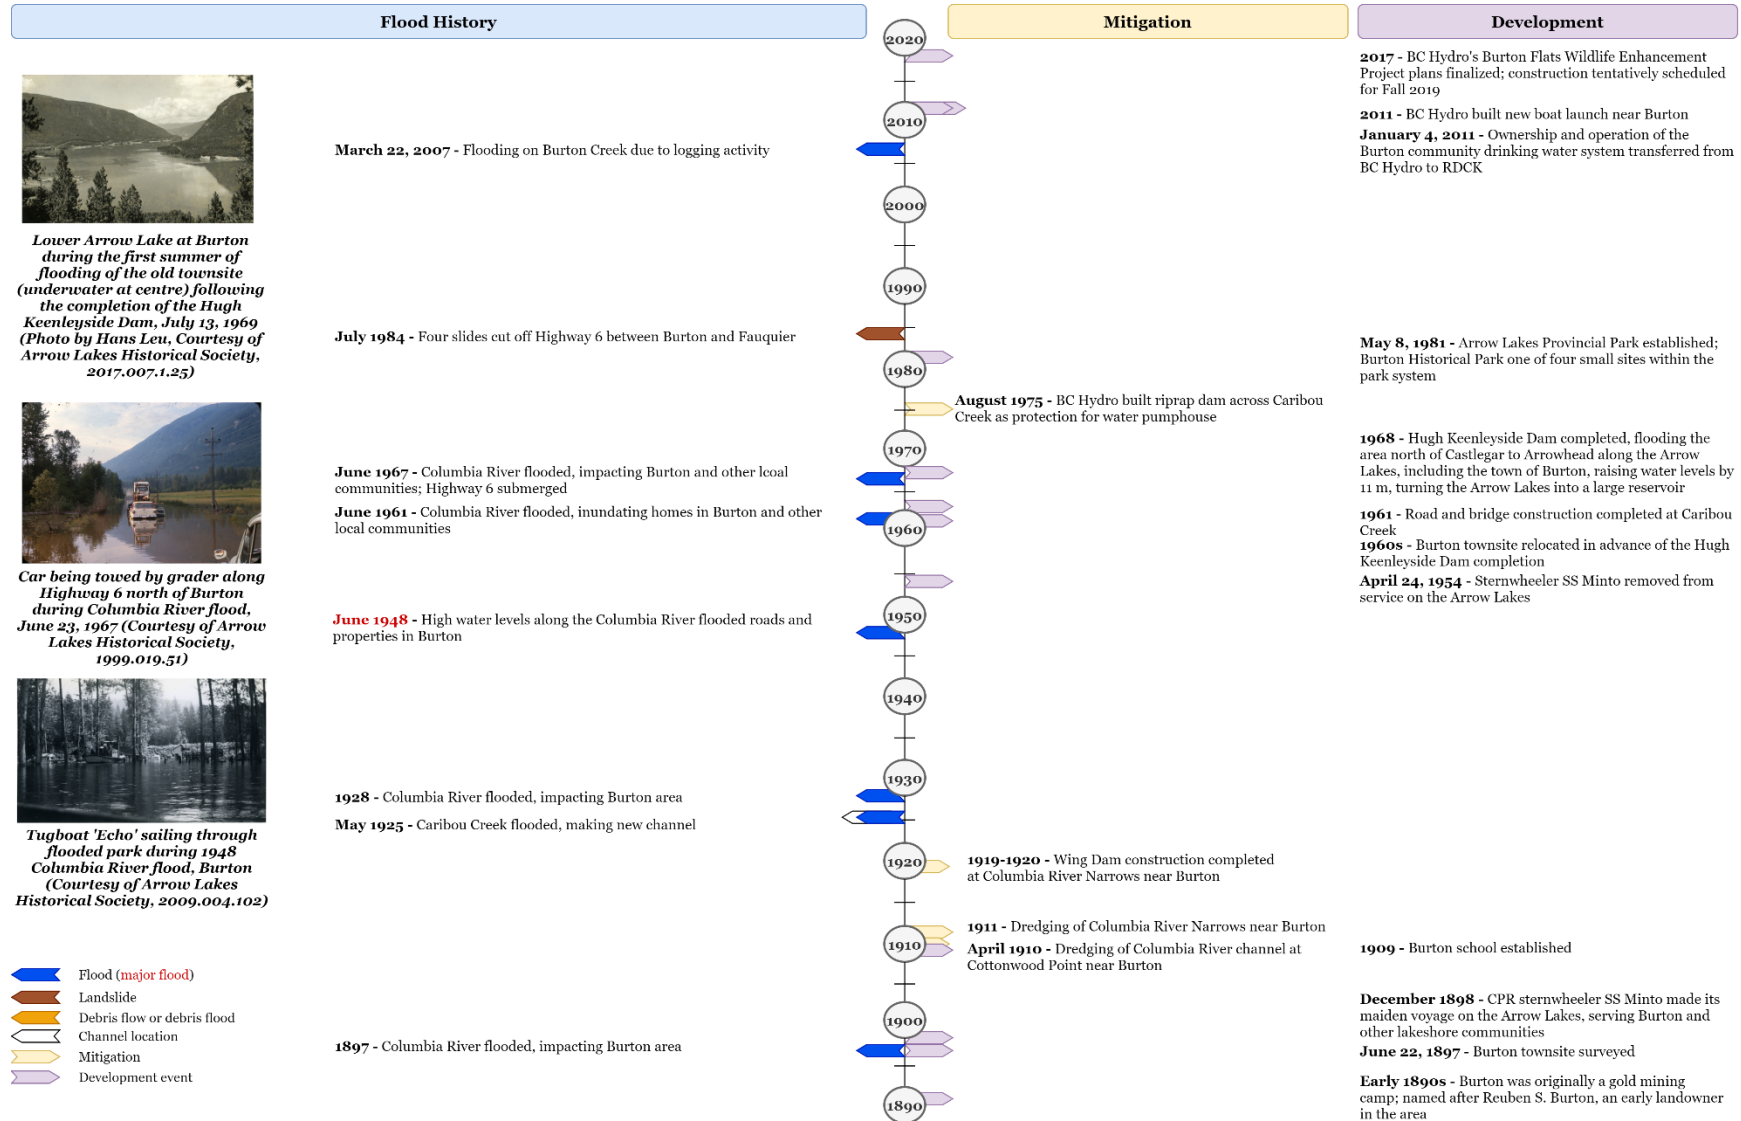


Figure 3-3. Summary of recorded flood history, mitigation, and development history at the Burton Creek.

3.3. Hydraulic Structures

There are three bridges in within the Burton study area. These include the bridge on the Highway 6 causeway, the bridge on McCormack Road on Caribou Creek, and the bridge on the Private Access Road, which is also on Caribou Creek.

The bridge on Highway 6 is located along the causeway that separates the outlets of Burton and Caribou Creeks from Lower Arrow Lake (Figure 3-4). The bridge has a span of 72.9 m and width of 11.5 m, and is supported by two circular concrete piers (Figure 3-5). The bridge over Caribou Creek on McCormack Rd is located approximately 1 km upstream from the Highway 6 bridge. It has a span of 17.8 m and a width of 6 m (Figure 3-6). The bridge on the Private Access Road is located approximately 350 m upstream from the McCormack Rd bridge. It has a span of 22.0 m and a width of 5.5 m. Table 3-1 provides a summary of the bridge dimensions.



Figure 3-4. View looking east of the embankment and bridge along Highway 6 with Lower Arrow Lake in the foreground. The outlet of Caribou Creek is on the left and the outlet of Burton Creek is on the right. BGC, July 6, 2019.



Figure 3-5. View from upstream of the Highway 6 bridge looking west towards Lower Arrow Lake. Photo: Explore, October 19, 2019.



Figure 3-6. View from downstream of the McCormack Road bridge on Caribou Creek. Photo: BGC, November 22, 2019.



Figure 3-7. View from downstream of the Private Access Road bridge on Caribou Creek. Photo: Explore, October 24, 2019.

Table 3-1. Bridge dimensions.

Bridge	Highway 6	McCormack Road	Private Access Road	Source of Dimensions
Top deck elevation (m)	446.06	451.41	455.79	Survey
Bottom deck elevation (m)	444.57	449.74	453.73	Survey /Scaled from photos
Deck Span (m)	72.9	17.8	22	Survey
Deck Thickness (m)	1.6	1.67	1.3	Scaled from photos
Deck Width (m)	11.5	6	5.5	Survey
Number of Piers	2	0	0	
Pier Thickness (m)	1.4	None	None	Survey
Shape of Piers	Circular			
Pier Construction	Concrete			

3.4. Previous Mitigations

Other than the construction of the Keenleyside Dam, which resulted in the flooding of the Arrow Lakes and the relocation of the Town of Burton to its current location in 1968, little flood mitigation has been constructed in the history of the town. The only example on record is the riprap dam that was built across Caribou Creek by BC Hydro as protection for the water pump house which

feeds the water system to the settlement of Burton. B.C. Hydro installed the water system when the settlement was moved prior to the flooding of the Arrow Reservoir.

3.5. Bank Erosion and Avulsion History

Channel migration controlled by bank erosion is a typical process in rivers. This process may occur as gradual erosion at the outside of river bends, or as sudden widening of the river during floods. Gradual channel migration generally results from sediments being eroded along the outer bank of a meander bend and deposited as a point bar along the inside of the meander bend (Charlton, 2007).

There are no specific historical studies addressing avulsion, bank erosion, and resulting channel changes within the study area. However, the Lidar data and historical imagery show evidence of multiple channel avulsions. The overall results of the channel change analysis are presented in Section 5.1., including some examples of channel avulsions in the area.

4. METHODS

This section summarizes the assessment methodology applied to the Burton Creek study area. Additional details on the methodology applied are summarized in Appendices C, D and E.

4.1. Field Data, Topographic Data and River Bathymetric Surveys

4.1.1. Fieldwork and Site Investigations

A site reconnaissance of Burton and Caribou Creeks was conducted July 6, 2019 by Marc Oliver Trottier, P.Eng. by helicopter. On November 22, 2019, Beatrice Collier-Pandya, EIT, and Hilary Shirra, EIT, collected photographs and observations regarding the channels and channel protection at the Highway 6 and McCormack Road bridge crossings.

4.1.2. Topographic Mapping

Detailed topographic data of the floodplain were available from a classified high-resolution Lidar dataset obtained from RDCK and flown in July 2018. BGC was provided with tiles containing the classified point cloud and a 1 m bare-earth Digital Elevation Model (DEM). Lidar coverage provided by RDCK for the entire study area is shown in Figure 4-1.

The Lidar data was provided with the following coordinate system:

- Horizontal Datum: NAD83 CSRS
- Projection: UTM Zone 11 North
- Vertical Datum: CGVD 2013
- Geoid Model: CGG2013.

As part of the Lidar acquisition, orthophotos were not collected. As a result, the classification of the raw Lidar point cloud contained inaccuracies particularly around gravel bars and the location of the creek's shorelines. In general, the location of the channel within the surveyed sections of the creeks were found to be consistent with the location of the channels collected by the Lidar.

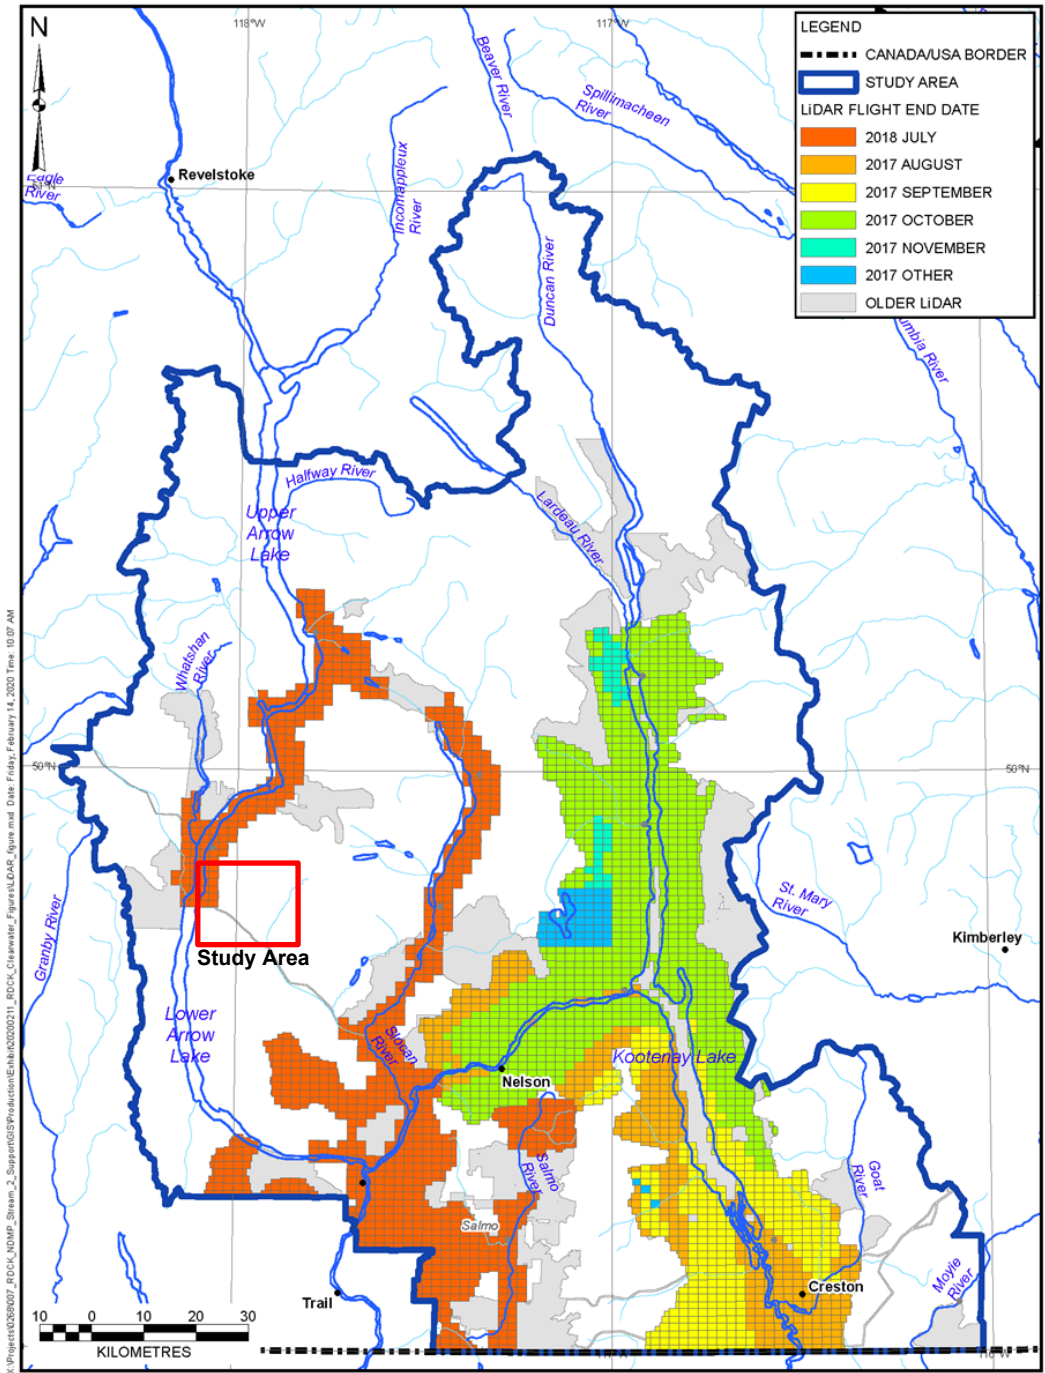


Figure 4-1. Lidar coverage for RDCK clear-water³ flood hazard study sites.

³ Clear-water flooding is flooding of riverine or lakes resulting due to an excess of clear-water discharge in a watercourse or body of water such that land outside the natural or artificial banks which is not normally under water is submerged

4.1.3. Ground and Bathymetric Surveying

BGC contracted Explore Surveys Inc. (Explore) to conduct a detailed survey of Burton and Caribou Creeks and its entrance to Lower Arrow Lake (Drawing 03). The scope of work included surveying of the channel bed and bridges. A combination of Static GNSS techniques, RTK, and RTN techniques were used to establish a precise, reliable Survey Control Network for the length of the project. The Survey Control Network was integrated with existing BC Survey Control and/or the Canadian Base Network. The survey data was to be provided in the 3TM NAD 83 (CSRS) UTM 11 North coordinate system with elevation in the CGVD2013 Vertical Datum.

The survey (ground and bathymetric) was conducted from November 4 to 22, 2019. The survey covered approximately 2.5 km of Caribou Creek, 2.2 km of Burton Creek, and a 3.2 km by 1.4 km area of Lower Arrow Lake. Surveying of the channels was completed by wading the channel and using GNSS RTK GPS. Bathymetric survey in the Lower Arrow Lakes and within the bay was completed using a Single Beam echosounder (sonar) aboard a vessel. Drawing 03 provides a summary of locations collected using ground survey and sonar (bathymetry) techniques. Bathymetric data were collected at an average spacing of 2 to 5 meters along cross-section profiles extending from bank to bank. Cross-sections were spaced every 10 to 20 m and perpendicular to the shoreline. Sonar data was collected along continuous transects spaced between 10 to 20 m apart with a density of 5 to 10 m.

Explore also reported on the dimensions of the three bridges and provided details such as the length of the span, width of the bridge, top of curb elevation, bottom of deck (low chord) elevation, and width of piers as shown on annotated Figure 4-2.



Figure 4-2. Example of bridge structure features collected during the Burton Creek survey.

4.1.3.1. Survey Equipment, Accuracy and Processing Software

Table 4-1 provides a list of survey equipment and the reported accuracy. Hypack 2018 Hydrographic Software was used to correlate global position system (GPS) and hydrographic data together.

Table 4-1. Summary of survey equipment.

Equipment Type	Reported Accuracy
GPS	
Trimble R10 GNSS Trimble R8 GNSS Trimble R6 GNSS	<ul style="list-style-type: none"> • Single Baseline: <30 km • Horizontal: 8 mm + 1 ppm RMS • Vertical: 15 mm + 1 ppm RMS • Horizontal: 3 mm + 0.1 ppm RMS • Vertical: 3.5 mm + 0.4 ppm RMS
Total Station	
Trimble SX10 Robotic Scanning Total Station	<ul style="list-style-type: none"> • Angular Accuracy: +/- 1" (0.3 mgon) • EDM Range: 1 m – 5,500 m to single prism • Scanning EDM Range: 1 m – 800 m • Distance Accuracy: 1 mm + 1.5 ppm • Distance Accuracy Scanning: 2 mm + 1.5 ppm
Hydrographic Equipment	
CEESCOPE Hydrographic System	<ul style="list-style-type: none"> • Depth Range: 0.20 m to 200 m • Accuracy (Corrected for Sound Velocity): 0.01 m +/-0.1 % depth

4.1.4. Terrain Creation

Following completion of the survey, BGC integrated the bathymetry data with the Lidar bare-earth DEM to generate a continuous terrain model for use in hydraulic modelling (HEC-RAS 2D). The process to generate the terrain model from the topographic modelling and the bathymetric survey was as follows:

1. Elevation contours were generated along the banks of the surveyed channels from the ground classified Lidar point cloud. The contours were clipped to the banks of the channels.
2. The survey data points and the clipped elevation contours along the channels were interpolated into a DEM representing the channel bathymetry where the surveying was performed. The interpolation was performed using the Topo to Raster tool within ArcGIS. This DEM was masked so that it only contained elevations within the channels and a portion of the banks.
3. The masked channel bathymetry DEM was merged back into the bare-earth DEM to form the complete terrain model.

The results of this process were reviewed, and adjustments made to remove artifacts from the process. Many of the artifacts encountered were due to changes in the channel alignment between the period of the Lidar collection and the survey. Bridge decks were removed from the

DEM so as to not artificially dam the flows. The flow hydraulics at bridge crossings are detailed in Appendix E.

4.2. Channel Change and Bank Erosion Analysis

Floods induce high shear stresses on channel banks, which can promote bank erosion. Non-cohesive materials such as sands and gravels are more susceptible to erosion than cohesive banks. Standard hydraulic models to simulate floods do not consider bank erosion and assume the channel geometry is static. BGC conducted a separate analysis to assess changes in the floodplain and channel and their potential influence on flood hazards.

Channel change mapping and bank erosion approaches using remote sensing have been widely used to detect variations in the position of channel geomorphology features (e.g., channels, banks, and bars) (Trimble & Cooke, 1991; Marcus, 2012). These methods have been reviewed and considered useful to quantify the rate of change over a study period (Lawler, 2006).

This section briefly describes the data and methods used to document planform channel changes within the study area and analyze the bank erosion processes observed between 1978 and 2020. It also outlines the limitations and uncertainties of the methodology. The studied area comprises a 5.6 km long reach belonging to Burton Creek and a 4.1 km section from the Caribou Creek (Drawing 04).

4.2.1. Data Sources

Aerial photographs and satellite imagery supported with Lidar were used to assess historical changes in channel planform geomorphology and bank retreat within the Burton Creek floodplain (Table 4-2). The channel mapping was also informed by the river bathymetric survey described in Section 4.1.

Table 4-2. Aerial photographs and satellite imagery used in the analysis.

Imagery	Year	Roll / Frame	Photo Number	Nominal Scale	Source
Aerial photograph	1978	BC78108	193-194	1:40000	BC Government
High resolution imagery	2007	N/A	N/A	0.8 m resolution	Digital Globe from ESRI World Imagery
High resolution imagery	2019	N/A	N/A	1:10,000	Google Earth Pro (v 7.3.2.5776)

In this analysis, the following tasks were completed:

Data preparation:

This task involved the acquisition of historic aerial photographs and imagery for georeferencing and mosaics creation. All the imagery and photographs were georeferenced to the same coordinate systems (NAD 1983 CSRS UTM, Zone 11N).

Geomorphic analysis:

The geomorphic analysis involved three steps. First, distinct channel reaches were delineated (i.e., length of the channel with similar physical characteristics). These reaches were then used to quantify the average bank retreat in metres recorded in the analyzed period.

Second, the channel thalweg and planform were delineated. The channel planform refers to the form of a river as viewed from above (Charlton, 2007). The 2019 thalweg was generated from the river bathymetric survey data. The historical channel thalweg locations were interpreted from the photographs and manually digitized on-screen. Third, geomorphic features were mapped using defined geomorphic criteria developed by BGC based on Wheaton et al. (2015); Howes and Kenk (1997) and Church (2006) (Table 4-3 and Table 4-4).

Table 4-3. Geomorphic features used for geomorphic floodplain and channel mapping.

Feature	Type	Map Symbol	Description
Channel	Main-channel	Fmc	Flowing channel with distinct banks that carries most of the river discharge. This feature is always active.
	Side-channel	Fsc	Flowing channel with distinct banks that carries a portion of the river discharge less than the main channel. This feature is active.
	Back-channel	Fbc	Abandoned channel with distinct banks whose downstream end is connected to the river but whose upstream end is plugged. This feature is always active.
	Flood-channel	Ffc	Channel with distinct banks connected to a main- or side-channel only in overbank flood conditions.
	Abandoned-channel	Fac	Inactive channel remnant(s). No longer directly connected to active flow (e.g., oxbow lake).
Bars	Lateral and point-bars	Fib	Deposition and accumulation of sediments against the bank (lateral or side bars) and on the inside of a meander bend (point-bars).
	Mid-channel bar	Fmb	Feature characterized by the accumulation of sediments within the main channel. When the position of the bar become stable and vegetated during decades, they are commonly called islands.
Plain	Floodplain	Fp	Includes the level-ground area susceptible to overbank flow or flooding during high-flow events.
Fan	Alluvial fan/delta	Ff	A fan is a relatively smooth sector of a cone with a slope gradient from apex to toe up to and including 15°, and a longitudinal profile that is either straight, or slightly concave or convex (Howes and Kenk, 1997).
Terrace	Terrace	Ft, FGt LGt	Flat or gently sloping areas bounded by an adjacent scarp. Fluvial terrace (Ft) deposits consist of channel deposits that may include some overbank materials.

Table 4-4. Levels of activity assigned to the geomorphic features.

Activity Class	Map Symbol	Description
Active	A	This indicates that the fluvial processes were active on the identified geomorphic feature at the time when the remote sensing data were collected. The floodplain and lateral, point or mid-channel bars are considered active until vegetation cover is established. Less than 75% of vegetation coverage or isolated patches of vegetation were classified as active.
Dormant/ Inactive	D	This indicates that there is no observable evidence of fluvial processes being active on the identified geomorphic feature at the time when the remote sensing data were collected. The floodplain and lateral, point or mid-channel bars are considered dormant when at least 75% of the mapped feature is covered by vegetation.

Channel Change and Bank Erosion Analysis

The channel banks and geomorphic features delineated in the previous stage were used to quantify net bank erosion between the observation periods. A spatial analysis using ArcGIS software by ESRI (Version 10.6.1) was applied to estimate the net change in riverbank positions (bank retreat) between each set of imagery. The following steps were completed:

- A numerical value of 1 (active) or 2 (dormant/inactive) was assigned to each mapped feature in the map attribute table. The values were determined based on the activity criteria described in Table 4-4. The general assumption was that unvegetated bars are active and would be submerged during bankfull conditions and, therefore, part of the active channel. A raster layer consisting of 1 and 2 values was created for each year of analysis.
- Then, the map algebra tool was used to subtract any two raster layers and estimate net change within the period. Negative values indicate bank erosion. Zero values indicate no change within the period and positive values indicate either bar stabilization, lateral accretion or deposition (Table 4-5).

Table 4-5. Channel change classes.

Map Algebra Results	Class	Definition
-1	Bank Erosion, Channel Migration	Lateral migration of the channel due to the removal of bank material has occurred at raster cell.
0	No Change	The channel features remained the same at the raster cell between the reviewed periods.
1	Stabilization, Bank Accretion	Two conditions are possible for this result. First, pre-existing channel bars have remained stable during the period, allowing for vegetation to grow (stabilization). Second, the fluvial processes acting during the reviewed timeframe have promoted the sideways deposition along channel meanders (lateral accretion).

4.2.2. Limitations and Uncertainties

Some limitations of the interpretation of remote sensing data to the quantification of channel change include:

- The scale and resolution of available aerial photographs, which affects the level of detail that can be identified for a given year.
- The geometric distortion that results from terrain and imagery acquisition method (e.g. camera tilt in aerial photographs). These factors may result in a displacement of the geomorphic features from its true position.
- The degree to which the historical photographs represent relevant channel changes within the reviewed timeframe to within tolerable levels of accuracy.
- Challenges related to the quantification of the error during the process. Possible sources of error in this analysis include scanning, georeferencing error, and on-screen digitizing errors.
- The discharge at the time of image capture. At higher discharges, most gravel bars would be inundated.

These errors were reduced in this study by applying common procedures including:

- Focusing on the central part of each aerial photograph
- Scanning the paper photographs at a high resolution
- Conducting geometric corrections on ArcGIS 10.6.1 software using the spline transformation tool, which is commonly used when local accuracy is wanted.

4.3. Hydrological Analysis

4.3.1. Flood Frequency Analysis

A regional flood frequency analysis (regional FFA) was performed to estimate peak discharge estimates for Burton Creek. The use of the regional FFA was necessary as there is no hydrometric station on Burton Creek or its tributaries from which to derive peak flow estimates. Water level hydrographs for early May to late June 2017 on Burton Creek were collected as part of the Wildlife Enhancement Program at Burton Flats (KWL, 2017), however, the data are not sufficient to derive statistical frequency relationships. Peak discharges were estimated for Burton and Caribou Creeks independently at the junction within the bay formed by the Highway 6 causeway. Additionally, an estimate of the peak discharge for Burton Creek downstream of the junction was also estimated and used to inform the flood scenario development.

The regionalization of floods procedure was completed using the index-flood method. For this project, the mean annual flood was selected as the index-flood. Dimensionless regional growth curves were developed from Water Survey of Canada peak flow data to scale the mean annual flood to other return periods. The index-flood for each creek is determined from watershed characteristics. The index-flood was estimated using a regional and provincially-based ensemble of multiple regression models. The provincially-based ensemble of multiple regression models was selected for analysis of Burton Creek.

As part of the regional FFA, the Burton Creek and Caribou Creek watersheds were assigned to the '*1 West Hydrologic Region for Watersheds less than 500 km²*' based on respective characteristics. Hydrologic regions were made up of hydrometric stations that share similar watershed characteristics. In the KWL, (2017) study for the Burton Flats Wildlife Enhancement Program, the water level hydrographs collected on Burton Creek during May and June were compared to nearby gauges on Kuskanax Creek, Burrell Creek and Inonoaklin Creek. The study found that the Burton Creek water level response is generally more similar to Burrell and Inonoaklin Creeks, with similar decreases in water level in early summer and more noted peaks than Kuskanax Creek. Both Burrell and Inonoaklin Creeks were stations within the same hydrological region.

The index flood was estimated for both watersheds using a provincially-based ensemble of multiple regression models. The methodology for the regional FFA as well as the estimation of peak discharge at the hydrometric station are described in Appendix C.

4.3.2. Lower Arrow Lake Reservoir Levels

Lower Arrow Lake Reservoir levels will impact the flooding extent at the downstream end of Burton and Caribou Creeks. The Upper and Lower Arrow Lake Reservoirs were widenings of the Columbia River created by the Keenleyside Dam, which was commissioned in 1968, and is currently operated by BC Hydro. The primary purpose of the dam is to flood mitigation and to regulate the flow of the water to the downstream hydroelectric dams. Damming the Lower Arrow Lake raised the lake level approximately 12 metres above natural levels.

Water levels on Upper Arrow Lake recorded by the WSC hydrometric station at Nakusp (08NE104), approximately 30km north of the study area, were examined. The monthly mean water elevation varies 11.33 m over the year from a low of 426.22 metres above sea level (masl) in March to a maximum of 437.55 masl in July. The normal maximum reservoir level is 440.13 masl; however, surcharge to 440.75 m may be requested (and granted) by the Comptroller under the Columbia River Treaty flood control agreement (KWL 2017). However, discussions with BC Hydro suggested that lake levels would not exceed 440.7 masl.

For the hydraulic modelling, the 440.7 masl water level was selected for the water level in the Lower Arrow Lake to represent a potential worst-case scenario. The 200-year flood scenario for both Burton and Caribou Creeks was run with Lower Arrow Lake at 440.1 masl to examine the sensitivity of the flooding to the water level in the reservoir.

4.3.3. Climate Change Considerations

Engineers and Geoscientists British Columbia (EGBC) offer guidelines that include procedures to account for climate change when flood magnitudes for protective works or mitigation procedures are required (EGBC, 2018). The impacts of climate change on peak discharge estimates in the Burton and Caribou creeks were assessed using statistical and processed-based methods (Appendix D). The statistical methods included a trend assessment on historical flood events using the Mann-Kendall test as well as the application of climate-adjusted variables (mean annual precipitation, mean annual temperature, and precipitation as snow) to the Regional FFA model.

The process-based methods included the trend analysis for climate-adjusted flood data offered by the Pacific Climate Impacts Consortium (PCIC).

4.4. Hydraulic Modelling

4.4.1. General Approach

The preparation of flood hazard maps requires the development of a hydraulic model. The two-dimensional (2D) hydraulic model HEC-RAS 2D (Version 5.0.7) was used to simulate the flood scenarios summarized in Table 4-6. HEC-RAS is a public domain hydraulic modelling program developed and supported by the United States Army Corps of Engineers (Brunner & CEIWR-HEC, 2016). Each scenario was modelled with climate-change adjusted discharges to represent projected future conditions in 2050 as described in Sections 4.3.3 and 5.2.

Table 4-6. Return period classes.

Return Period (years)	Annual Exceedance Probability
20	0.05
50	0.02
200	0.005
500	0.002

Within the Burton Creek model domain there are three bridges: two bridges on Caribou Creek and one bridge on the Highway 6 embankment. A fourth bridge is also located near the inlet on Burton Creek on the Burton-Snow Forest Service Road but was not considered within the model as it is sufficiently far from the reporting area. As model results indicated that the bridges provide sufficient of clearance for a 200-year flow event and would not affect flow, the bridge decks were removed from the HEC-RAS 2D model.

Several culverts are also located along the Highway 6 embankment, but these were not considered in the modelling as they are small and not likely to have an impact on the discharge of flow from the estuary to Arrow Lake. Additionally, these culverts are likely to become clogged with debris during a flood. No managed or orphaned dikes were observed along the three creeks.

4.4.2. Model Inputs

Key model inputs include: (1) the topographic model to represent the floodplain and in-channel bathymetry, (2) the flood hydrology to represent peak discharges for various return period, and (3) the boundary conditions at the upstream and downstream end of the study extent. Table 4-7 summarizes the key numerical modelling inputs selected for the HEC-RAS 2D model. Additional description of the topographic, flood hydrology, and boundary conditions are provided in the sections below.

Table 4-7. Summary of numerical modelling inputs.

Variable	HEC-RAS
Topographic Input	Lidar (2018); Bathymetry (2019)
Grid cells	Variable (2.5- 5 m)
Manning's n	0.076 (channel), varied based on landcover data (NALCMS, 2010), (out of channel) Manning's n values from Chow (1959).
Upstream boundary condition	Steady climate change adjusted peak discharges (Q_{20} , Q_{50} , Q_{200} and Q_{500})
Downstream boundary condition	Steady water surface elevation of 440.70 masl.

4.4.2.1. Terrain Model

Following completion of the survey, BGC integrated the bathymetry data and surveyed cross sections with the Lidar to generate a DEM for use in hydraulic modelling based on the process described in Section 4.1.2.

4.4.2.2. Model Domain and Boundary Conditions

The model domain for the study area was set to include Caribou Creek, Burton Creek, and Snow Creek (a tributary of Burton Creek) and extends into Lower Arrow Lake located downstream of the Highway 6 bridge. The overall model domain covers a much larger area than the extents of the bathymetric survey. The larger extents were necessary to establish boundary conditions at suitable locations so that they would not impact the model results as sections of the river with anabranching were sensitive to the location of the boundary conditions. The modelling extents, and the location of the upstream and downstream boundary conditions are shown in Figure 4-4.

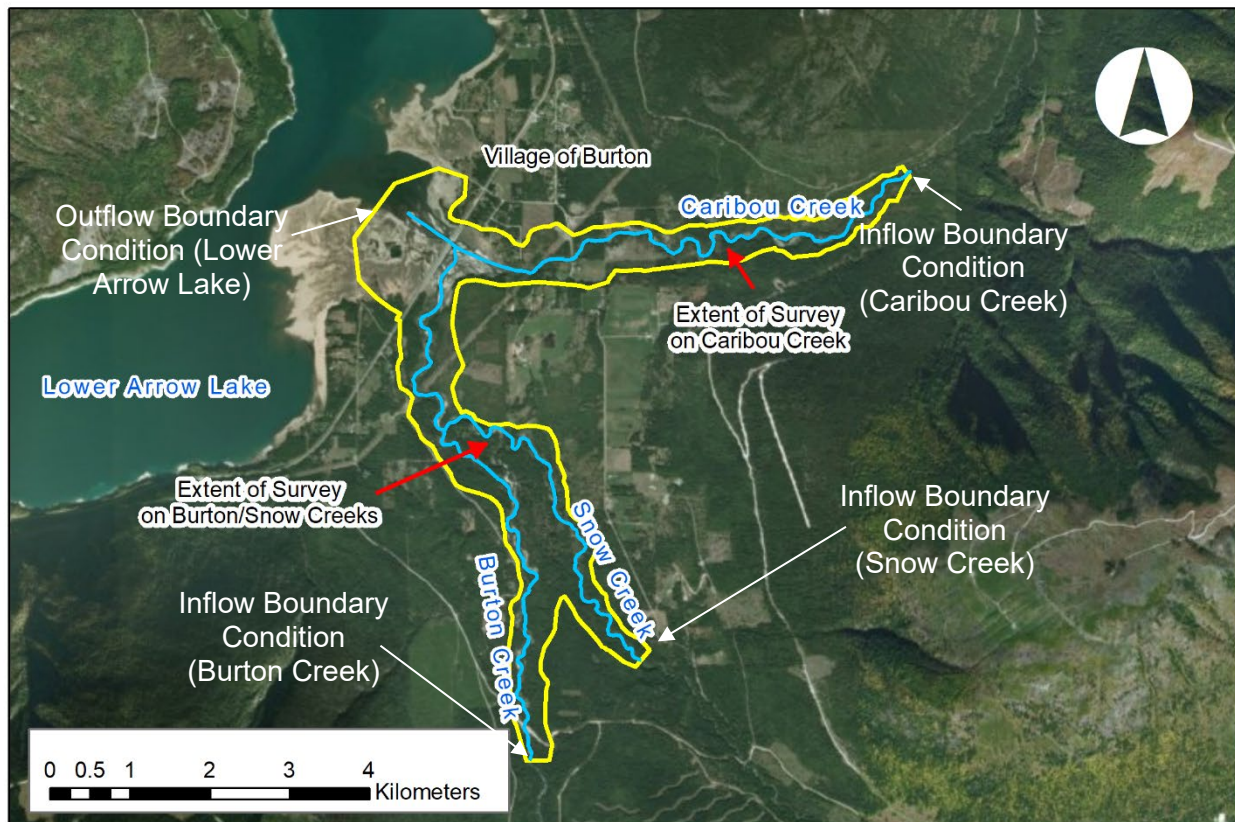


Figure 4-3. Burton Creek study area modelling domain.

4.4.2.3. Development of Flooding Scenarios

Flood scenarios were run for the 20-, 50-, 200- and 500-year flood events for Burton and Caribou creeks individually; referred to as Flood Scenario 1 and 2. It was assumed highly likely that concurrent flooding of a similar magnitude would occur on both creeks as they are adjacent to one another and have similar watershed areas and orientation. Therefore, the two flood scenarios included flooding on the alternate creek to account for potential interaction. Specifically, concurrent flooding of the two creeks typically results in higher water elevations in the bay upstream of the Highway 6 bridge and additional flooding upstream of the bay along the creeks caused by backwater effects.

Flood scenario 1 involved modelling the return period flood events on Burton Creek based on the peak discharges estimated on the watershed upstream of the confluence of Caribou Creek. The concurrent flooding in Caribou Creek was assumed to be equal to the same return period event for the combined Burton and Caribou creek watershed minus the estimated peak discharges for Burton Creek only.

Flood scenario 2 involved modelling the return period flood events on Caribou Creek based on the peak discharges estimated on the watershed upstream of the confluence of Burton Creek. The concurrent flooding in Burton Creek was assumed to be equal to the same return period event for the combined Burton and Caribou creek watershed minus the estimated peak discharges for Caribou Creek only.

The results of these two flood scenarios were then superimposed on each other to determine the final flood hazards.

4.5. Hazard Mapping

BGC prepared hazard maps based on the results from the numerical flood modelling. Specifically, BGC prepared two types of maps for the Burton Creek study: hazard scenario maps and an FCL map. The scenario maps support emergency planning and risk analyses, and the FCL map supports communication and policy implementation, as described further below.

4.5.1. Hazard Scenario Maps

Hazard scenario maps display the hazard intensity (destructive potential) and extent of inundated areas for each scenario assessed. Two versions of the hazard scenario maps for each return period are provided: i) maps showing flood depth, and ii) maps showing flow impact force (*IF*) defined as the combination of fluid bulk density (ρ), area of impact (*A*) and velocity (*v*) shown in Equation 4-1:

$$IF \propto \rho A v^2 \quad [\text{Eq. 4-1}]$$

For clearwater flooding, 1000 kg/m³ was assumed for ρ as shown Equation 4-1. The area of impact represents the area of the object that is impacted or the portion thereof. For this level of study, depth of flow from modelling results is used as a proxy for the height of the area and the impact force is then represented as an impact force per unit width, in this case 1 m.

Maps displaying flow depth support assessments where inundation is the primary mechanism of damage. Flow impact force maps highlight locations where a combination of higher flow velocity and depth may warrant additional assessment (i.e., analyses of bank stability, erosion, or life safety). Table 4-9 provides a description of the flow impact force ranges and their impacts on life safety and impacts on the built environment. A flow depth map for the 200-year peak discharge is provided in this report in Drawing 06. Flow depth and flow impact force maps for all return periods are displayed on Cambio.

Table 4-8. Flow impact force values shown on the flood hazard scenario maps (Cambio)

Impact Force (kN/m)	Description
≤ 1	Slow flowing shallow and deep water with little or no debris. High likelihood of water damage. Potentially dangerous to people in buildings, in areas with higher water depths.
1 to 10	Mostly slow but potentially fast flowing shallow or deep flow with some debris. High likelihood of sedimentation and water damage. Potentially dangerous to people in the basement or first floor of buildings without elevated concrete foundations.
10-100	Fast flowing water and debris. High likelihood of structural building damage and severe sediment and water damage. Dangerous to people on the first floor or in the basement of buildings. Replacement of unreinforced buildings likely required.
>100 ¹	Fast flowing debris. High likelihood of building destruction. Very dangerous to people in buildings irrespective of floor.

Note:

1. Flow intensities greater than 100 kN/m in clear water creeks are generally confined to the main channel.

4.5.2. Flood Construction Level Mapping

FCLs are required for areas adjacent to river floodplains for consideration during planning. An FCL can be incorporated into regulation by authorities to provide guidance for new constructions on the extent and elevation of possible flooding in the area. In BC, FCLs have historically been calculated as the higher of the followings:

- Water surface profile for the design peak instantaneous flow plus 0.3 m of freeboard
- Water surface profile for the design peak daily flow plus 0.6 m of freeboard.

The freeboard is applied to the estimated water surface profile to account for uncertainties in the calculation of the water surface. As noted in EGBC (2017, 2018) many BC rivers, freeboard has been set higher than these minimum values to account for sediment deposition, debris jams, and other factors. Recently, several studies have recommended using 0.6 m of freeboard above the design peak instantaneous flow (KWL 2014, 2017; NHC 2008, 2014, 2016, 2018). As such, we have selected to use this approach as well for the Burton Creek study area. The FCLs were generated by creating isolines from the predicted 200-year water surface plus a 0.6 m freeboard and extending the isolines across the limits of the floodplain generally perpendicular to the flow direction. The FCL maps are presented in Drawing 07.

5. RESULTS

5.1. Channel Change Mapping and Bank Erosion

The objective of the geomorphic and bank erosion analysis was to document historical changes in channel width, fluvial landforms, and related geomorphic processes using 1978 aerial photographs, and 2007 and 2019 high-resolution imagery. The mapped geomorphic units for the successive years are illustrated in the aerial photograph comparison maps (Drawings 04-A and 04-B). The estimated changes between periods are shown in Drawings 05-A and 05-B. The study area was divided into reaches to facilitate the analysis of the observed changes (Figure 5-1 and Figure 5-2). The reaches were classified for both Burton and Caribou Creek. The relevant features of these reaches, including average bank retreat based on the planimetric review, are provided in Table 5-1. A summary of the key changes observed within the 5.6 km long section in Burton Creek and the 4.1 km section of Caribou Creek is included in Table 5-2, and a description of the relevant channel changes within the reaches on the active floodplain follows.

5.1.1. Caribou Creek

Caribou Creek is generally a gravel wandering channel with irregular channel pattern. Three channel reaches were identified along Caribou Creek (CR-1, CR-2, CR-3) (Figure 5-1). The average bankfull width of the main channel within these reaches is approximately 10 m to 40 m wide. The average channel gradient decreases from around 1.2% at CR-1 to 0.01% near the channel junction at Highway 6 bridge (Figure 5-1). The Caribou Creek has undergone detectable channel changes within the reviewed timeframe. The most relevant change was detected between the 1978 to 2007 period, characterized by a general displacement of the channel thalweg towards the left (south) bank. The best example was observed approximately 400 m downstream of the McCormack road in CR-2 (Drawing 05-A).

5.1.2. Burton Creek

Like Caribou Creek, Burton Creek is a gravel wandering channel with irregular channel pattern. Four channel reaches were described within this section of the creek (reaches BR-1, BR-2, BR-3, and BR-4) (Figure 5-2). The average bankfull width of the main channel within these reaches ranges from approximately 16 m to more than 150 m at the downstream limit near Arrow Lake. The average channel gradient ranges from 2 % (BR-1) to 0.8% (BR-4). The channel change analysis indicates that the creek has been laterally unstable throughout the reviewed record (Drawing 05-B). Three sections of interest were identified within the Burton Creek.

Section 1 includes the steepest reaches (BR-1 and BR-2). The average slope gradient varies from 1.6% to 2% (Figure 5-2). This area has experienced distinct adjustments in channel geometry. At several locations, the channel has shifted from left to right bank around vegetated islands. Meanders have started to develop within BR-1.

Section 2 extends along reach BR-3. This section is defined by a slope change at the junction of Snow Creek (Figure 5-2). At this location, the channel pattern changes to a meandering planform which has remained similar through the record (Drawing 05-B). The observed changes are characterized by an increase in meander curvature which has resulted in bank erosion at multiple

meander bends. Up to 20 m of bank retreat was estimated on the left (cardinal direction) bank about 350 m downstream of the Snow Creek and Burton Creek junction during the 2007 to 2019 period.

The third section includes reach BR-04. It is located on the fan-delta that has formed where Burton Creek discharges into Arrow Lake (Figure 5-2). At this location, the Burton Creek channel is unconfined and braided from the apex. The average length of the main channel is 585 m. Mid-bar formation and overlapping bars are common. As the creek flows through the active area of the fans, deposition processes dominate over erosion. Middle-bar formation and bed aggradation can cause the flow to overtop the bank. The Lidar data show that avulsion has occurred multiple times in this section (Drawing 05).

Table 5-1. Channel reaches characterization and average bank retreat.

Creek	Reach	Length ¹ (m)	Channel Width Variation ² (m)	Average Bank Retreat 1978-2007 (m)	Average Bank Retreat 2007-2019 (m)	Channel Pattern
Caribou	CR-1	2059	10 - 30	18.8	3.6	Meandering
Caribou	CR-2	1456	10 - 36	11.5	2.4	Wandering
Caribou	CR-3	595	10 - +150	-	2.5	Anabranching (Fan-delta reach)
Burton	BR-1	1554	16 - 28	9.1	7.2	Wandering
Burton	BR-2	1398	16 - 32	18.2	10.1	Wandering
Burton	BR-3	2060	16 - 45	11.1	10.4	Meandering
Burton	BR-4	585	16 - +150	1.8	1.2	Anabranching (Fan-delta reach)
Snow	SR-1	1284	10 - 37	11.3	3.3	Meandering
Snow	SR-2	1843	8 - 44	19.0	6.3	Wandering

Notes:

1. Based on 2017 Lidar and bathymetry data.
2. Accuracy is +/- 2 m (2007 and 2019) and +/- 5 m (1958)

Table 5-2. Summary of key changes observed within the analyzed periods.

Period	Maximum Bank Retreat ¹ (m)	Highlighted observations
1978 -2007	Caribou: 58 (CR-1) Burton: 47 (BR-2)	<ul style="list-style-type: none"> • Noticeable channel shifting on the steepest reaches resulting in bank erosion. The most significant ones were found along (BR-2) and (CR-1) reaches. • Extensive braiding and deposition within the fan area. The active area of the fan remained similar in size to the active area mapped in 1958.
2007- 2019	Caribou: 13 (CR-1) Burton: 42 (BR-2); 23 (SR-2)	<ul style="list-style-type: none"> • Channel widening caused by erosion and lateral migration (significant at reaches BR-1, BR-2, BR-3, and CR-1). • Channel avulsion 400 m downstream of McCormack road (reach CR-3). • Extensive braiding and aggradation within the fan area. The active area of the fan remained similar to the active area mapped in 2007. Although, revegetation and stabilization have started on some elevated areas (northwest of CR-3 and north of BR-4 at Highway 6 bridge). • The channel planform has remained similar within the McCormack road reach (CR-2).

Note:

1. Accuracy is +/- 2 m (2007 and 20019) and +/- 5 m (1958)

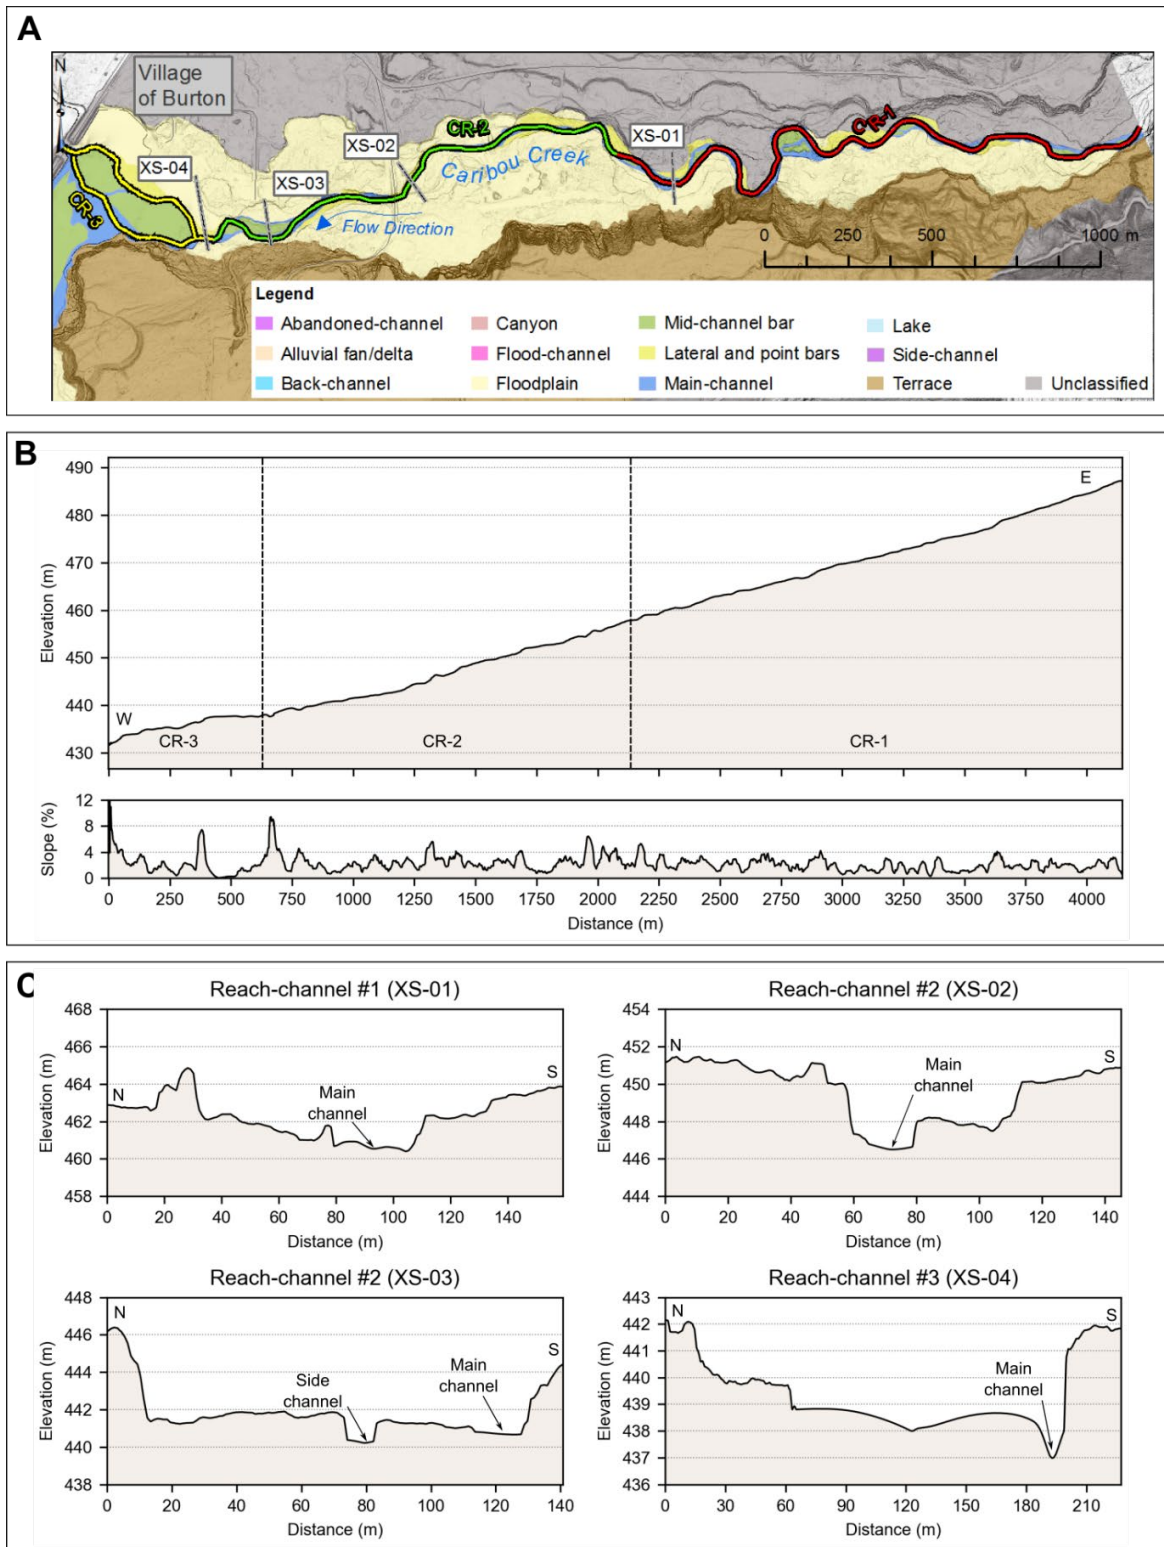


Figure 5-1. Channel reaches within the Caribou Creek floodplain. (A) Plan view of the river and floodplain. (B) Caribou Creek long-profile and slope gradient. Section lines are from left (north) to right (south) bank. (C) Relevant cross-sections.

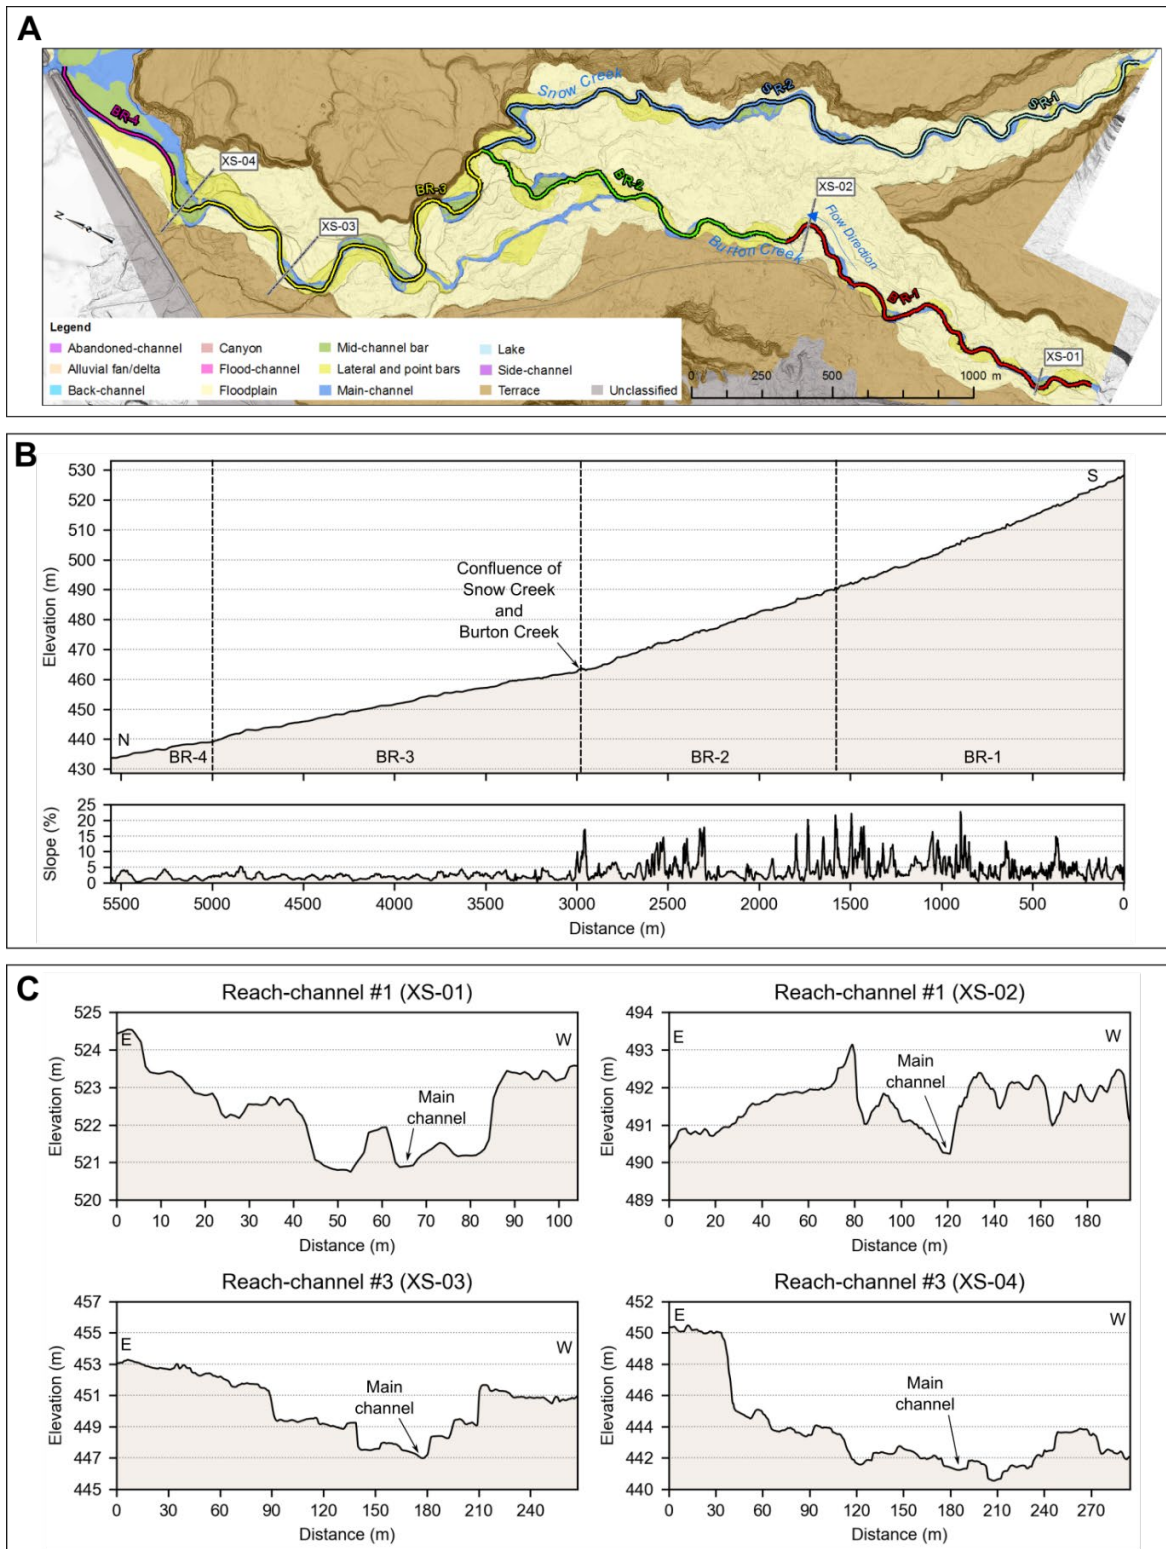


Figure 5-2. Channel reaches within the Burton Creek floodplain. (A) Plan view of the river and floodplain. (B) Burton Creek long-profile and slope gradient. Section lines are from left (north) to right (south) bank. (C) Relevant cross sections.

5.2. Hydrological Modelling

5.2.1. Historical Peak Discharge Estimations

Instantaneous peak discharges for select return periods were determined at three locations using the regional FFA (Section 4.3.1 and Appendix C). The three locations were i) Burton Creek at the confluence with Caribou Creek ii) Caribou Creek at the confluence with Burton Creek and iii) Burton Creek downstream of the confluence at the Highway 6 bridge. These three locations were necessary to generate the individual flood scenarios for Burton and Caribou Creeks as discussed in Section 4.4.2.3. The estimated historical peak flows are shown in Table 5-1 The provincially-based index flood model was selected to estimate the historical peak discharge because it was deemed more realistic compared to similar catchments in the RDCK.

1.1.1. Accounting for Climate Change

The climate change impact assessment results based on the methods presented in Section 4.3.3 were difficult to synthesise in order to select climate-adjusted peak discharges on a site-specific basis. The assessment of the trends in the discharge records was inconclusive. The results of the statistical flood frequency modelling generally show a small decrease in the flood magnitude, while the results of the process-based discharge modelling generally show an increase with a wide range in magnitude. As a result, peak discharge estimates were adjusted upwards by 20% to account for the uncertainty in the impacts of climate change in the RDCK as per Appendix D. The climate-adjusted peak discharge estimates for various return periods are also listed in Table 5-3 **Error! Reference source not found.**

Table 5-3. Historical and climate-adjusted peak discharge estimates for Burton Creek at Highway 6, Burton Creek, and Caribou Creek.

Return Period (years)	AEP	Caribou Creek (m ³ /s)		Burton Creek (m ³ /s)		Burton Creek at Highway 6 (m ³ /s)	
		Historical Peak Flows (m ³ /s)	Climate-adjusted Peak Flows (m ³ /s)	Historical Peak Flows (m ³ /s)	Climate-adjusted Peak Flows (m ³ /s)	Historical Peak Flows (m ³ /s)	Climate-adjusted Peak Flows (m ³ /s)
2	0.5	38	46	41	49	73	88
20	0.05	78	93	83	99	149	178
50	0.02	94	113	100	120	180	216
200	0.005	107	146	129	155	232	278
500	0.002	141	169	150	180	269	323

5.2.2. Flood Scenarios

The peak discharge estimates from the previous section were used to determine the inflows to the hydraulic model for the two flood scenarios presented in Section 4.4.2.3. As discussed in

Section 4.4.2.2, the model domain included three inflow boundary conditions which need to be specified; Caribou Creek, Burton Creek and Snow Creek (a tributary of Burton Creek).

For Flood Scenario 1, the Burton Creek flood scenario, the climate-adjusted peak discharges for Burton Creek, shown in Table 5-4, were split between the Snow Creek tributary and Burton Creek by proportioning the discharge based on the ratio of their individual watershed areas at their confluence. The inflow to Caribou Creek was determined by subtracting the peak discharge based on Burton Creek at Highway 6 (combined Burton and Caribou watersheds) from the peak discharge of Burton Creek. The values for Flood Scenario 1 are shown in Table 5-5 .

Table 5-4. Inflows used for Flood Scenario 1 – Burton Creek Flood Scenario.

Return Period	AEP	Inlet Caribou Creek (m ³ /s)	Inlet of Burton Creek (m ³ /s)	Inlet of Snow Creek (m ³ /s)
2	0.5	39	26	22
20	0.05	79	54	46
50	0.02	96	65	55
200	0.005	123	84	71
500	0.002	143	97	83
Catchment Area (km ²) ¹		237	155	131

Note:

1. The combined catchment areas for Burton and Snow Creek as slightly smaller than the total catchment area shown in Table 2-1 as these are the catchment areas measured at the junction of these creeks and does not account for the additional area downstream of the junction.

The same approach was used for determining the inflows for Flood Scenario 2, the Caribou Creek flood scenario. The climate-adjusted peak discharges for Caribou Creek from Table 5-3 were used as inflows to the model at the inlet boundary of Caribou Creek. The inflows for Burton and Snow Creeks were determined by subtracting the peak discharge on Burton Creek at Highway 6 from the peak discharge for Caribou Creek and split based on the ratios of the watershed areas at their confluence. The inflows for the Flood Scenario 2 are shown in Table 5-5 .

Table 5-5. Inflows used for Flood Scenario 2 – Caribou Creek Flood Scenario.

Return Period	AEP	Inlet Caribou Creek (m ³ /s)	Inlet of Burton Creek (m ³ /s)	Inlet of Snow Creek (m ³ /s)
2	0.5	46	23	19
20	0.05	93	46	39
50	0.02	113	56	47
200	0.005	146	72	61
500	0.002	169	83	71
Catchment Area (km ²) ¹		237	155	131

Note:

1. The combined catchment areas for Burton and Snow Creek as slightly smaller than the total catchment area shown in Table 2-1 as these are the catchment areas measured at the junction of these creeks and does not account for the additional area downstream of the junction.

5.3. Hydraulic Modelling

The simulated flood profiles for the scenarios are shown in Figure 5-3 and Figure 5-4. The profiles represent the water surface elevation along the centre of the creek channels during the peak of the floods. A summary of the key observations from the hydraulic modelling is included in Table 5-6.

Table 5-6. Summary of modelling results.

Process	Key Observations
Clear-water inundation	<ul style="list-style-type: none"> • The flooding along Burton and Caribou creeks is generally constrained to the channel and immediate floodplains for the different scenarios considered. • The velocities in the main channels are very fast due to the steep gradients of the creeks. • In areas where anabranching is present on Burton, Snow, and Caribou Creeks, the flow paths are complex. • The backwater effects from the water levels in Lower Arrow Lake are minimal due to the steep gradients of the creeks. • The Caribou Creek channel hydraulics were more sensitive to the selection of a Manning's n roughness coefficient than Burton Creek (see Appendix E).
Hydraulic Structures (Bridges)	<ul style="list-style-type: none"> • The flood elevations for all scenarios modeled did not reach the lower chord of the three bridges considered in this study as verified through 1D modelling. • There is approximately 3.74 m of clearance between the lower chord of the Highway 6 bridge and the 200-year return period flood. • There is approximately 1.63 m of clearance between the lower chord of the McCormack Road bridge and the 200-year return period flood. • There is approximately 0.74 m of clearance between the lower chord of the bridge on the Private Access Road and the 200-year return period flood.

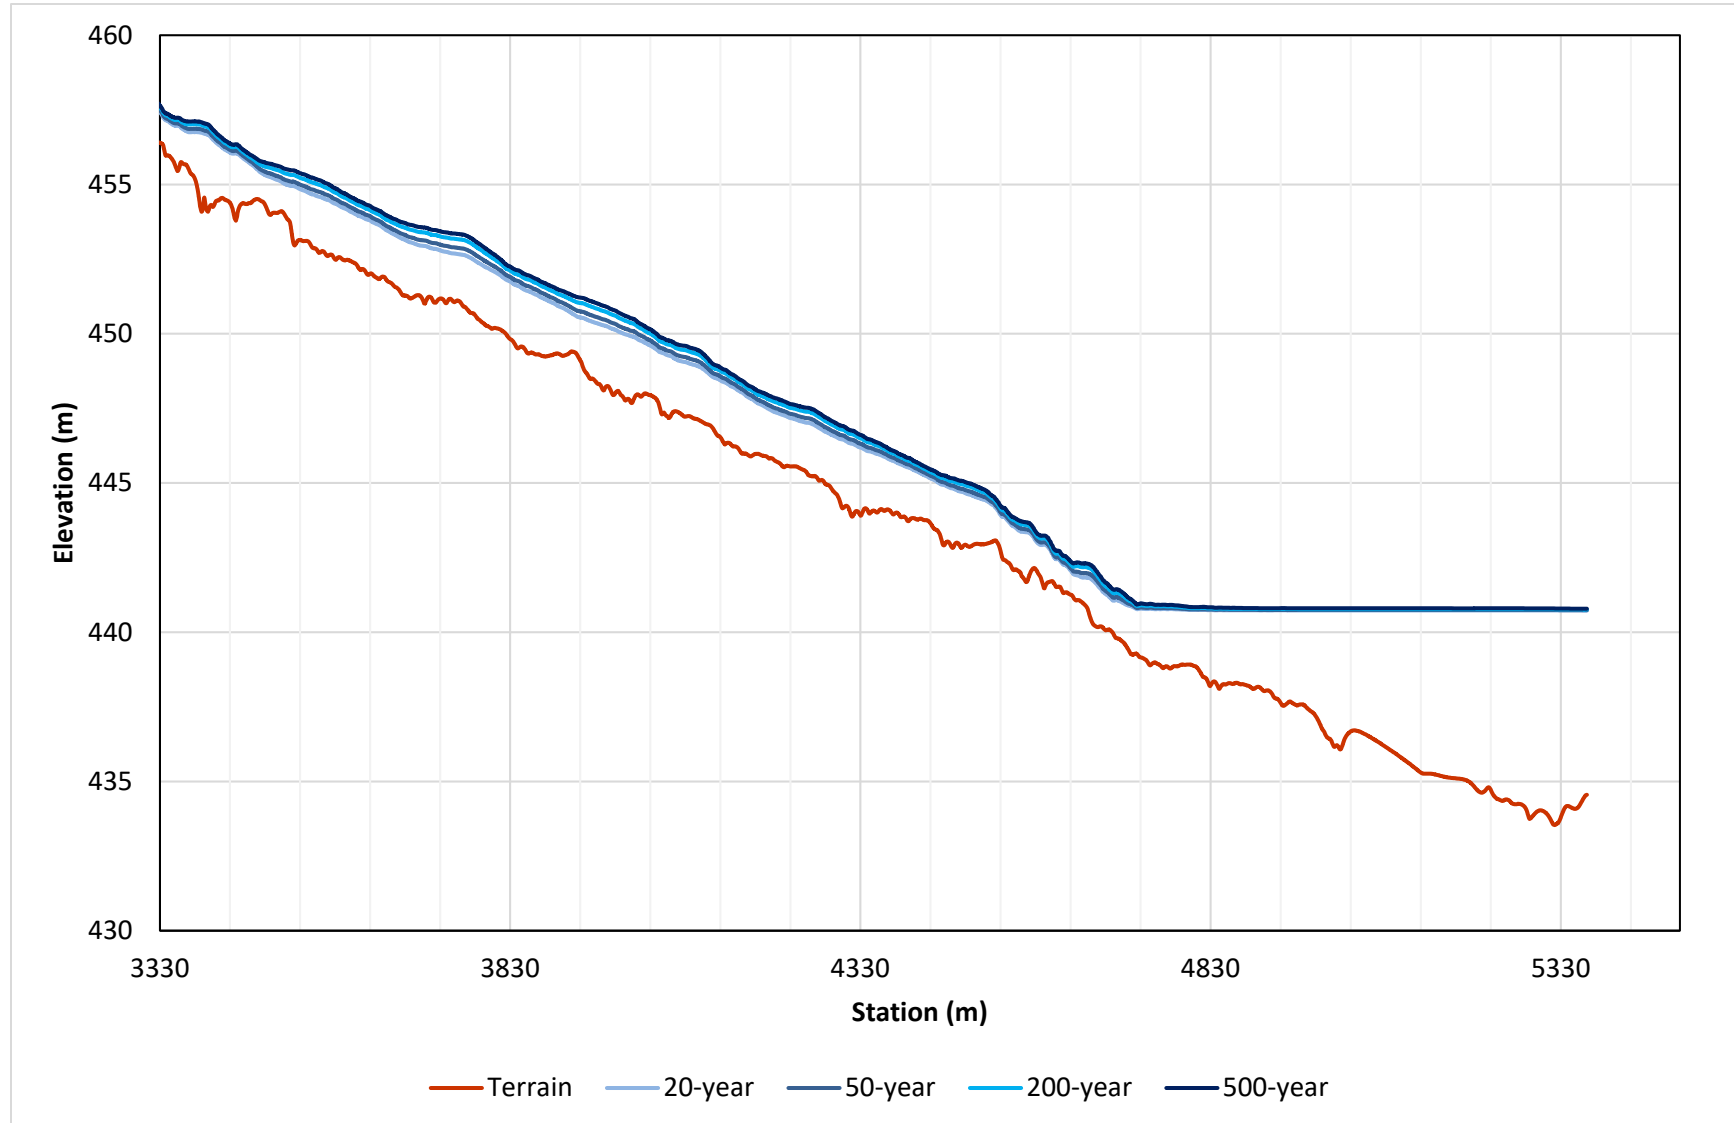


Figure 5-3. Burton Creek water surface profiles within the extent of the surveyed channel. Water surface profiles extend to the junction with Caribou Creek upstream of the Highway 6 bridge.

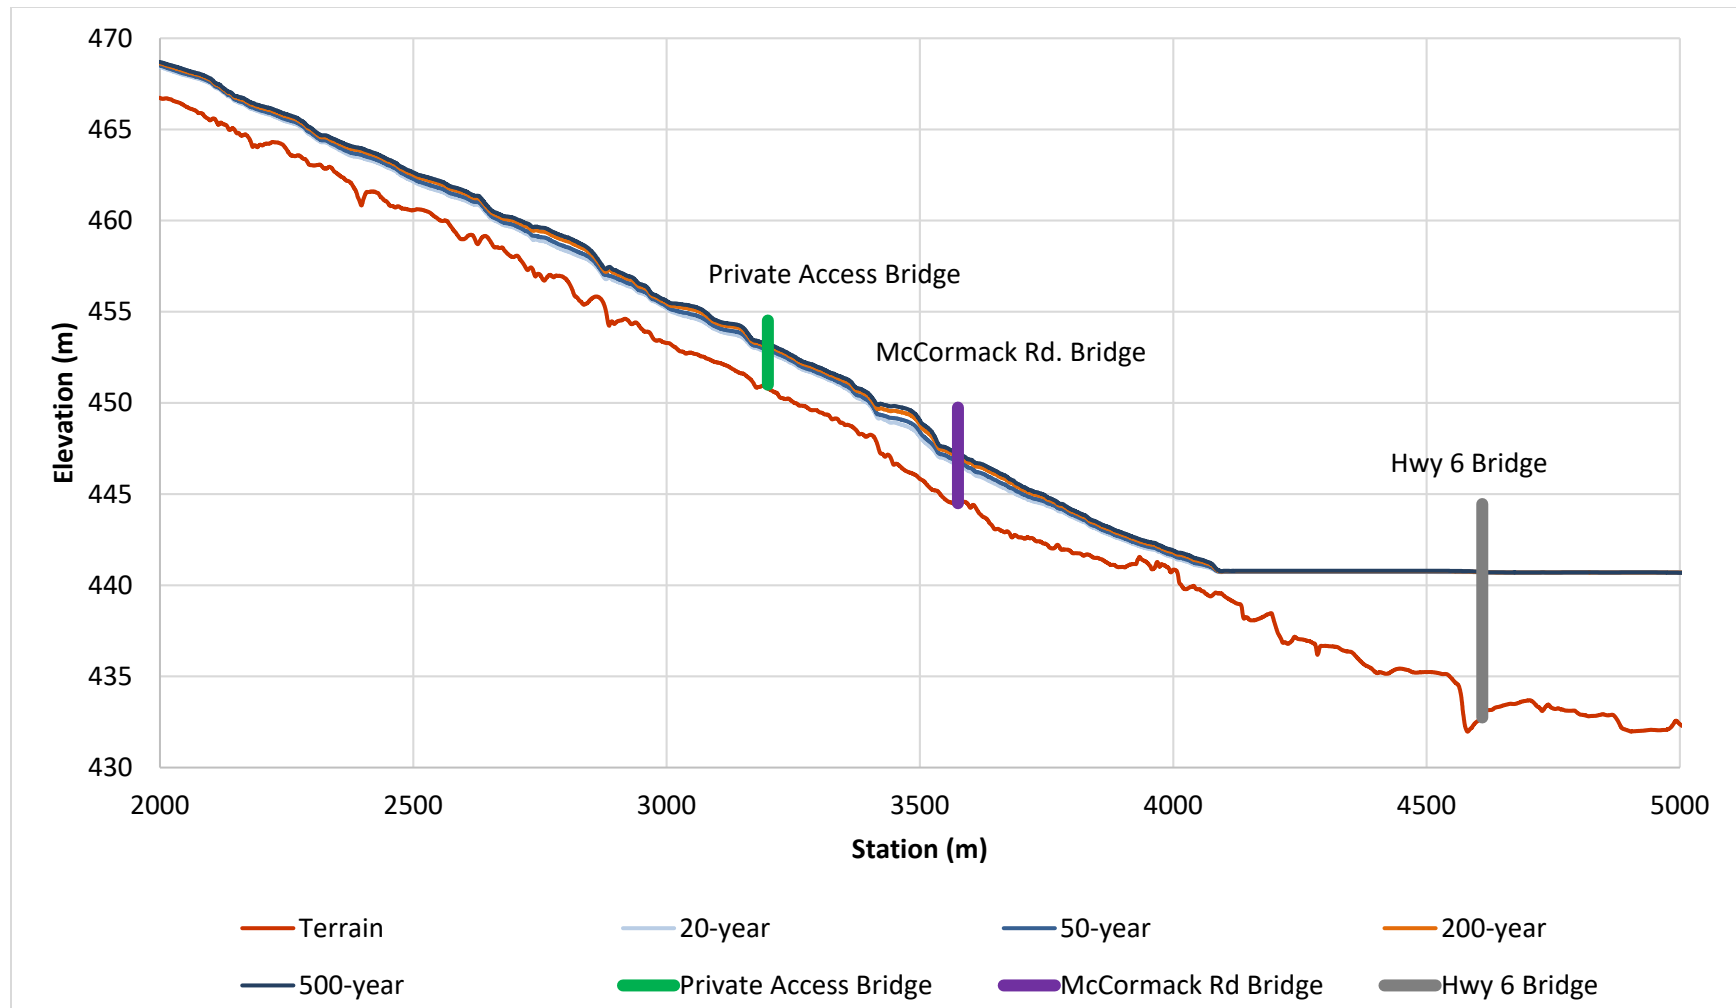


Figure 5-4. Caribou Creek water surface profiles within the extent of the surveyed channel. The water surface profiles extend through the Highway 6 bridge and into Lower Arrow Lake.

5.4. Flood Hazard Mapping

Hazard scenario results from the range of return periods modelled are presented in Cambio. Drawing 06 provides modelled water depths for the 200-year return period event.

5.5. Flood Construction Level Mapping

FCL results for the 200-year water surface elevation plus 0.6 m freeboard are presented on Drawing 07. Note that elevations from the FCLs have not been surveyed in the field and should not be relied upon for accuracy of ground levels at the building lot scale.

6. SUMMARY AND RECOMMENDATIONS

This report provides a detailed flood hazard assessment of the floodplains for Burton Creek and Caribou Creek near the settlement of Burton. This location was chosen as a high priority site amongst hundreds in the RDCK due to its comparatively high risk. This report has resulted in digital hazard maps that provide a basis for quantitative risk assessment, if required. It also provides the basis to inform the conceptualization and potential design and construction of mitigation measures should those be found to be required for the Burton and Caribou creeks. A variety of analytical desktop and field-based tools and techniques were combined to understand the Burton Creek geomorphological and hazard history, its hydrology and hydraulics.

6.1. Flood Hazard Assessment

6.1.1. Channel Change Mapping and Bank Erosion

Channel change mapping and bank erosion analyses were completed to assess historical geomorphic changes in the study area and how these changes influence channel migration and flood hazards. In summary:

- The aerial photograph comparison maps (Drawings 04-A and 04-B) display observable fluvial landforms identified from the different sets of photographs and high-resolution imagery. These maps are useful to understand the geomorphic evolution of the channel over the reviewed timeframe and how geomorphic processes may influence flooding. For instance, bed aggradation and mid-bar formation within the proximal area of the fan-delta can divert water overbank or form new paths (avulsions).
- The channel change maps (Drawings 05-A and 05-B) illustrate the areas of recorded change between the reviewed aerial photos and high-resolution imagery (e.g. bank erosion, channel shifting, and stabilization or deposition). These changes were quantified to determine average bank retreat rates between 1978 and 2019 (Table 5-2). The results of the analysis show the rate of bank retreat and the direction, but do not explain the processes controlling the change. In general, it was found that both Caribou and Burton Creek are laterally unstable. The most significant changes within the studied reaches are characterized by an increase in meander curvature, which has resulted in bank erosion on the outside of multiple meander bends. The highest rate of bank retreat was estimated at Burton Creek (BR-3). Vegetated islands have also played a role in channel shifting by diverting the channel at multiple locations.

The resulting maps (Drawing 4A, B, and 5A, B) depict channel dynamics within the study area and their possible influence on flood hazards. Further efforts to assess bank erosion should be intended to estimate the erosion hazard for the different return periods.

6.1.2. Adjustment for Projected Climate Change

Historical peak flows derived from regional FFA were adjusted to account for future climate change. Key findings applied to flood mapping are:

- A 20% increase in peak discharge to account for climate change impacts by 2050 as described in Appendix D. Assessment of climate change impacts was completed using two approaches (statistical and process based) which generated inconsistent results.
- The climate-change adjusted peak discharges for Burton Creek at Arrow Lake range from 88 m³/s (2-year flood) to 323 m³/s (500-year flood).
- The climate-change adjusted peak discharges for Burton Creek upstream the junction with Caribou Creek range from 49 m³/s (2-year flood) to 180 m³/s (500-year flood).
- The climate-change adjusted peak discharges for Caribou Creek range from 46 m³/s (2-year flood) to 169 m³/s (500-year flood).

6.1.3. Hydraulic Modelling

A 2D numerical model developed using HEC-RAS was used to simulate selected hazard scenarios. Table 5-6 provides key observations derived from the numerical modelling. The water surface profiles for the flood scenarios are presented in Figure 5-3 and Figure 5-4 for Burton and Caribou Creeks. The hydraulic modelling demonstrates that the key hazards and associated risks on Burton and Caribou creeks stem from the high velocities within the main channels.

6.1.4. Flood Hazard Mapping

Two types of flood hazard maps are provided:

1. The individual hazard scenarios are captured through hazard maps that display estimated flow velocity, flow depth, and flood intensity. These maps can support assessment of development proposals and be used for emergency planning.
2. An FCL flood construction level map that combines the estimated water surface elevation for the 200-year return period event plus a 0.6 m freeboard. The FCL map is useful to assist development proposals in designated hazard zones.

Both the individual scenario hazard and FCL maps serve as decision-making tools to guide subdivision and other development permit approvals.

6.2. Limitations and Uncertainties

While systematic scientific methods were applied in this study, a number of uncertainties remain. As with all hazard assessment and concordant maps, the hazard maps prepared at Burton and Caribou creeks represent a snapshot in time. Future changes to the Burton or Caribou watersheds or fans including the following may warrant re-assessment and/or re-modelling:

- Future land use (urbanization) or landcover (deforestation, forest fire) changes in the floodplain or fan
- Substantial flood events
- Major changes in the channel planform or aggradation
- Bridge re-design
- Construction of flood control structures
- Substantial changes to Lower Arrow Lake water levels
- Effects of future climate change.

The assumptions made on changes in runoff due to climate change, while not unreasonable, are not infallible and will likely need to be updated occasionally as scientific understanding of such processes evolves. Despite these limitations and uncertainties, BGC believes that a credible hazard assessment has been achieved on which land use decisions can be made.

6.3. Considerations for Hazard Management

This section notes specific issues that could be considered in the short term given the findings of this study.

Key considerations are:

- The results of the channel change and bank erosion analysis show key areas that warrant bank erosion hazard assessment. Additional steps to understand bank erosion and hazard in the study area should include a characterisation of 1) bank susceptibility (erodibility); and, 2) critical shear stresses required to erode the banks at areas susceptible to erosion for the different discharge events. Both bank slope failures and fluvial erosion processes should be considered as part of the assessment.
- Key areas for bank hazard assessment include the following sections:
 - Reaches BR-2 and BR-3 on Burton Creek and reach CR-1 on Caribou Creek to determine the bank erosion hazard and the potential to impact flooding. At CR-1 the channel is migrating towards the left (south) bank with the potential to trigger slope instability of an old slide (approximately 1.5 ha). If re-activated, there is potential for channel blockage by landslide material.
- Data from high flow events were not available for model calibration. Collection of evidence for historical high flow events along the Burton and Caribou Creeks could be used to help calibrate and validate the model. This can be through either the installation of streamflow gauge(s) or the recording and survey of high-water marks after significant flood events.
- The results of the channel change and bank erosion analysis indicate that further work may be useful to quantify risks due to bank erosion and channel stability.
- Hydraulic modelling (1D and 2D) results indicate that the water levels for the 200-year floods are below the soffit of the bridges on the Highway 6 causeway, McCormack Road and the Private Access Road. The clearance of the 200-year and 500-year floods on the Private Access Road is limited. The low clearance on this bridge could result in the accumulation of debris which will result in a local increase in the flooding extents and water depth. Due to the configuration of the bridge (a perched bridge) the impact is not likely to be as significant as for other configurations but may still present a concern.
- The hazard mapping conducted for a range of return periods provides an improved hazard basis to apply for funding for additional risk assessment, emergency response planning, and mitigation projects. Results of the hazard mapping are provided on Drawing 06 for the 200-year water depth and digitally in Cambio Communities for the range of scenarios modelled (e.g., 20-year, 50-year, 500-year).

- The FCLs presented in Drawing 07 for the 200-year return period flood event plus 0.6 m freeboard provides an improved basis for community planning, bylaw development, and emergency response planning in areas subject to flood hazards, with consideration of climate change. The application of the FCL map requires discussions and regulatory decisions for both existing and proposed development. Building and floodproofing elevations should be established from legal survey and benchmarks. Setback distances from the natural boundaries of watercourses are not shown on maps. FCLs provide a standards-based approach which are simple to apply and interpret. In some cases, the FCL may be impossible or impractical to implement for several reasons. Allowances should be permitted for stakeholders to apply for a site-specific reduction in the FCLs contingent on a report by a suitably qualified Professional Engineer, preferably using a risk-based approach.

6.4. Recommendations

Recommendations are provided in the Summary Report (BGC, 2020) as they pertain to all studied RDCK creeks.

7. CLOSURE

We trust the above satisfies your requirements at this time. Should you have any questions or comments, please do not hesitate to contact us.

Yours sincerely,

BGC ENGINEERING INC.

per:

Patrick Grover, M.A.Sc., P.Eng.
Senior Hydrotechnical Engineer

Elisa Scordo, MSc., P.Geo
Senior Hydrologist

Melissa Hairabedian, M.Sc., P.Geo.
Senior Hydrologist

Reviewed by:

Rob Millar, Ph.D., P.Eng., P.Geo.
Principal Hydrotechnical Engineer

Hamish Weatherly, M.Sc., P.Geo.
Principal Hydrologist

PG/RM/HW/mp/syt

Final stamp and signature version to follow once COVID-19 restrictions are lifted

REFERENCES

- BGC Engineering Inc. (2019, March 31). *Flood and Steep Creek Geohazard Risk Prioritization* [Report]. Prepared for Regional District of Central Kootenay.
- BGC Engineering Inc. (2019, May 24). *NDMP Stream 2 Application: Flood Mapping* [Work Plan (Revised)]. Prepared for Regional District of Central Kootenay.
- BGC Engineering Inc. (2019, November 15). *NDMP Stream 2 Project Deliverables* (Revised). Prepared for Regional District of Central Kootenay.
- BGC Engineering Inc. (2020). *RDCK Floodplain and Steep Creek Study, Summary Report* (Draft). Prepared for Regional District of Central Kootenay
- British Columbia Ministry of Forests, Lands and Natural Resource Operations, Water Management Branch. (2017). *Flood protection works: Structural works* [Dataset]. Retrieved from <https://catalogue.data.gov.bc.ca/dataset/flood-protection-works-structural-works>
- Brunner, G. W., & CEIWR-HEC. (2016). HEC-RAS River Analysis System 2D Modeling User's Manual. Retrieved from www.hec.usace.army.mil
- Charlton, R. (2007). *Fundamentals of fluvial geomorphology*. Routledge.
- Church, M. (2006). Bed material transport and the morphology of alluvial river channels. *Annu. Rev. Earth Planet. Sci.*, 34, 325-354.
- Chow, V.T. (1959), *Open-channel hydraulics*: New York, McGraw-Hill, 680 p.
- Demarchi, D.A. (2011, March). *An introduction to the ecoregions of British Columbia* (3rd ed.). Victoria, BC: British Columbia Ministry of Environment, Ecosystem Information Section. Retrieved from https://www2.gov.bc.ca/assets/gov/environment/plants-animals-and-ecosystems/ecosystems/broad-ecosystem/an_introduction_to_the_ecoregions_of_british_columbia.pdf
- Engineers and Geoscientists British Columbia (EGBC). (2017, January). *Professional practice guidelines: Flood mapping in BC*. Retrieved from <https://www.egbc.ca/getmedia/8748e1cf-3a80-458d-8f73-94d6460f310f/APEGBC-Guidelines-for-Flood-Mapping-in-BC.pdf.aspx>
- Engineers and Geoscientists of British Columbia (EGBC). (2018, July). *Professional practice guidelines: Legislated flood assessments in a changing climate in BC*. Retrieved from <https://www.egbc.ca/getmedia/f5c2d7e9-26ad-4cb3-b528-940b3aaa9069/Legislated-Flood-Assessments-in-BC.pdf.aspx>.
- Farjan, B., Gupta, A., & Marceau, D.J. (2016). Annual and seasonal variations of hydrological processes under climate change scenarios in two sub-catchments of a complex watershed. *Water Resources Management*, 30(8): 2851-2865.
- Fulton, R.J., Shetsen, I., Rutter, N.W. (1984). *Surficial Geology, Kootenay Lake, British Columbia-Alberta*. Geological Survey of Canada, Open File 1084, 2 sheets.

- Harder, P., Pomeroy, J.W., and Westbrook, C.J. (2015). Hydrological resilience of a Canadian Rockies headwaters basin subject to changing climate, extreme weather, and forest management. *Hydrological Processes* 29: 3905-3924.
- Harvey, A., Mather, A. E., & Stokes, M. (2004). Alluvial fans. *Encyclopedia of Geomorphology*, edited by: Goudie, AS, Routledge, London, 15-19. <https://doi.org/10.1016/B978-0-12-409548-9.11066-8>
- Howes, D. E., & Kenk, E. (1997). Terrain classification system for British Columbia (version 2). BC Ministry of Environment and BC Ministry of Crown Lands, Victoria, BC.
- KWL. (2014). Creek Hydrology, Floodplain Mapping and Bridge Hydraulic Assessment – Floodplain Development Permit Area, Flood Construction Level Development and Use. Report prepared for the City of North Vancouver and the District of North Vancouver.
- KWL. (2017). Wildlife Enhancement Program at Burton Flats Design Feasibility Final Report. Prepared by Kerr Wood Leidal for BC Hydro. Ref: CLBWORKS-30B.
- Lawler, D.M. (2006). The measurement of river bank erosion and lateral channel change: a review. *Earth Surface Processes and Landforms*, 18(9), 777-821. <https://doi.org/10.1002/esp.3290180905>
- Loukas, A. & Quick, M.C. (1999). The effect of climate change on floods in British Columbia. *Nordic Hydrology*, 30(3), 231-256. <https://doi.org/10.2166/nh.1999.0013>.
- Natural Resources Canada (NRCan). (2017). Federal Floodplain Mapping Framework. Version 1.0, General Information Product 112e. 20 pp.
- NHC (2008). Flood Risk Evaluation and Flood Control Solutions, Phase 1. (34920). Report prepared by Northwest Hydraulic Consultants for the City of Prince George.
- NHC (2008). Simulating the Effects of Sea Level Rise and Climate Change on Fraser River Flood Scenarios (GS14LMN-035). Report prepared by Northwest Hydraulic Consultants for BC Ministry of Forests Lands and Natural Resource Operations.
- NHC (2008). North Alouette and South Alouette Rivers Additional Floodplain Analysis: Phase 2 – Technical Investigations Completion Report. (34920). Report prepared by Northwest Hydraulic Consultants for the City of Maple Ridge.
- NHC (2018). Lillooet River Floodplain Mapping, Phase 1. (3002903). Report prepared by Northwest Hydraulic Consultants for the Pemberton Valley Dyking District Office.
- Marcus, W. A. (2012). Remote sensing of the hydraulic environment in gravel-bed rivers. *Gravel-bed rivers: Processes, tools, environments*, 259-285.
- Schnorbus, M., Bennett, K., Werner, A., & Berland, A. (2011). *Hydrologic Impacts of Climate Change in the Peace, Campbell and Columbia Watersheds, British Columbia, Canada. Hydrologic Modelling Project Final Report (Part II)*. Victoria: Pacific Climate Impacts Consortium.

- Schnorbus, M., Werner, A., & Bennett, K. (2014). Impacts of climate change in three hydrologic regimes in British Columbia, Canada. *Hydrological Processes*, 28, 1170-1189. <https://doi.org/10.1002/hyp.9661>
- Statistics Canada. (2017). *Burton, UNP [Designated place], British Columbia and British Columbia [Province] (table). Census Profile. 2016 Census.* Statistics Canada Catalogue no. 98-316-X2016001. Ottawa. Released November 29, 2017. <https://www12.statcan.gc.ca/census-recensement/2016/dp-pd/prof/index.cfm?Lang=E> (accessed February 25, 2020).
- Trimble, S.W., & Cooke, R.U. (1991). Historical sources for geomorphological research in the United States. *The Professional Geographer*, 43(2), 212-228.
- Turner, R.J.W., Anderson, R.G., Franklin, R., and Fowler, F., (2009). Geotour guide for the West Kootenay, British Columbia. Geology, landscapes, mines ghost towns, caves and hot springs. Geological Survey of Canada Open file 6135, British Columbia Geological Survey Geofile 2009-06.
- Wang, T., Hamann, A., Spittlehouse, D.L., and Carroll, C. (2016). Locally downscaled and spatially customizable climate data for historical and future periods for North America. *PLoS One* 11: e0156720.
- Water Management Consultants Inc. (2004, March 19). *Floodplain Mapping: Guidelines and Specifications [Report]*. Prepared for Fraser Basin Council.
- Wheaton, J. M., Fryirs, K. A., Brierley, G., Bangen, S. G., Bouwes, N., & O'Brien, G. (2015). Geomorphic mapping and taxonomy of fluvial landforms. *Geomorphology*, 248, 273-295.

APPENDIX A TERMINOLOGY

Table A-1 provides defines terms that are commonly used in geohazard assessments. BGC notes that the definitions provided are commonly used, but international consensus on geohazard terminology does not fully exist. **Bolded terms** within a definition are defined in other rows of Table A-1.

Table A-1. Geohazard terminology.

Term	Definition	Source
Active Alluvial Fan	The portion of the fan surface which may be exposed to contemporary hydrogeomorphic or avulsion hazards.	BGC
Aggradation	Deposition of sediment by a (river or stream).	BGC
Alluvial fan	A low, outspread, relatively flat to gently sloping mass of loose rock material, shaped like an open fan or a segment of a cone, deposited by a stream at the place where it issues from a narrow mountain valley upon a plain or broad valley, or where a tributary stream is near or at its junction with the main stream, or wherever a constriction in a valley abruptly ceases or the gradient of stream suddenly decreases	Bates and Jackson (1995)
Annual Exceedance Probability (P_H) (AEP)	The Annual Exceedance Probability (AEP) is the estimated probability that an event will occur exceeding a specified magnitude in any year. For example, a flood with a 0.5% AEP has a one in two hundred chance of being reached or exceeded in any year. AEP is increasingly replacing the use of the term ' return period ' to describe flood recurrence intervals.	Fell et al. (2005)
Avulsion	Lateral displacement of a stream from its main channel into a new course across its fan or floodplain. An "avulsion channel" is a channel that is being activated during channel avulsions. An avulsion channel is not the same as a paleochannel.	Oxford University Press (2008)
Bank Erosion	Erosion and removal of material along the banks of a river resulting in either a shift in the river position, or an increase in the river width.	BGC
Clear-water flood	Riverine and lake flooding resulting from inundation due to an excess of clear-water discharge in a watercourse or body of water such that land outside the natural or artificial banks which is not normally under water is submerged.	BGC
Climate normal	Long term (typically 30 years) averages used to summarize average climate conditions at a particular location.	BGC
Consequence (C)	In relation to risk analysis, the outcome or result of a geohazard being realised. Consequence is a product of vulnerability (V) and a measure of the elements at risk (E)	Fell et al. (2005); Fell et al. (2007), BGC

Term	Definition	Source
Consultation Zone	The Consultation Zone (CZ) includes all proposed and existing development in a geographic zone defined by the approving authority that contains the largest credible area affected by specified geohazards , and where damage or loss arising from one or more simultaneously occurring specific geohazards would be viewed as a single catastrophic loss.	Adapted from Porter et al. (2009)
Debris Flow	Very rapid to extremely rapid surging flow of saturated, non-plastic debris in a steep channel (Hungr, Leroueil & Picarelli, 2014). Debris generally consists of a mixture of poorly sorted sediments, organic material and water (see Appendix B of this report for detailed definition).	BGC
Debris Flood	A very rapid flow of water with a sediment concentration of 3-10% in a steep channel. It can be pictured as a flood that also transports a large volume of sediment that rapidly fills in the channel during an event (see Appendix B of this report for detailed definition).	BGC
Design Peak Daily Flow	The design flow (e.g. 200-year flood) based on the analysis of annual maximum daily average discharge records.	BGC
Design Peak Instantaneous Flow	The design flow (e.g. 200-year flood) based on the analysis of annual maximum instantaneous discharge records.	BGC
Elements at Risk (E)	<p>This term is used in two ways:</p> <ul style="list-style-type: none"> a) To describe things of value (e.g., people, infrastructure, environment) that could potentially suffer damage or loss due to a geohazard. b) For risk analysis, as a measure of the value of the elements that could potentially suffer damage or loss (e.g., number of persons, value of infrastructure, value of loss of function, or level of environmental loss). 	BGC

Term	Definition	Source
Encounter Probability	<p>This term is used in two ways:</p> <ul style="list-style-type: none"> a) Probability that an event will occur and impact an element at risk when the element at risk is present in the geohazard zone. It is sometimes termed “partial risk” b) For quantitative analyses, the probability of facilities or vehicles being hit at least once when exposed for a finite time period L, with events having a return period T at a location. In this usage, it is assumed that the events are rare, independent, and discrete, with arrival according to a statistical distribution (e.g., binomial or Bernoulli distribution or a Poisson process). 	BGC
Erosion	The part of the overall process of denudation that includes the physical breaking down, chemical solution and transportation of material.	Oxford University Press (2008)
Flood	A rising body of water that overtops its confines and covers land not normally under water.	American Geosciences Institute (2011)
Flood Construction Level (FCL)	A designated flood level plus freeboard, or where a designated flood level cannot be determined, a specified height above a natural boundary, natural ground elevation, or any obstruction that could cause flooding.	BGC
Flood mapping	Delineation of flood lines and elevations on a base map, typically taking the form of flood lines on a map that show the area that will be covered by water, or the elevation that water would reach during a flood event. The data shown on the maps, for more complex scenarios, may also include flow velocities, depth, or other hazard parameters.	BGC
Floodplain	The part of the river valley that is made of unconsolidated river-borne sediment, and periodically flooded.	Oxford University Press (2008)
Flood setback	The required minimum distance from the natural boundary of a watercourse or waterbody to maintain a floodway and allow for potential bank erosion.	BGC

Term	Definition	Source
Freeboard	Freeboard is a depth allowance that is commonly applied on top of modelled flood depths. There is no consistent definition, either within Canada or around the world, for freeboard. Overall, freeboard is used to account for uncertainties in the calculation of a base flood elevation, and to compensate for quantifiable physical effects (e.g., local wave conditions or dike settlement). Freeboard in BC is commonly applied as defined in the BC Dike Design and Construction manual (BC Ministry of Water, Land and Air Protection [BC MWLAP], 2004): a fixed amount of 0.6 m (2 feet) where mean daily flow records are used to develop the design discharge or 0.3 m (1 foot) for instantaneous flow records.	BC Ministry of Water, Land and Air Protection [BC MWLAP] (2004)
Frequency (f)	<p>Estimate of the number of events per time interval (e.g., a year) or in a given number of trials. Inverse of the recurrence interval (return period) of the geohazard per unit time. Recurring geohazards typically follow a frequency-magnitude (F-M) relationship, which describes a spectrum of possible geohazard magnitudes where larger (more severe) events are less likely. For example, annual frequency is an estimate of the number of events per year, for a given geohazard event magnitude.</p> <p>In contrast, annual probability of exceedance is an estimate of the likelihood of one or more events in a specified time interval (e.g., a year). When the expected frequency of an event is much lower than the interval used to measure probability (e.g., frequency much less than annual), frequency and probability take on similar numerical values and can be used interchangeably. When frequency approaches or exceeds 1, defining a relationship between probability and frequency is needed to convert between the two. The main document provides a longer discussion on frequency versus probability.</p>	Adapted from Fell et al. (2005)
Hazard	Process with the potential to result in some type of undesirable outcome. Hazards are described in terms of scenarios, which are specific events of a particular frequency and magnitude.	BGC
Hazardous flood	A flood that is a source of potential harm.	BGC

Term	Definition	Source
Geohazard	<p>Geophysical process that is the source of potential harm, or that represents a situation with a potential for causing harm.</p> <p>Note that this definition is equivalent to Fell et al. (2005)'s definition of Danger (threat), defined as an existing or potential natural phenomenon that could lead to damage, described in terms of its geometry, mechanical and other characteristics. Fell et al. (2005)'s definition of danger or threat does not include forecasting, and they differentiate Danger from Hazard. The latter is defined as the probability that a particular danger (threat) occurs within a given period of time.</p>	Adapted from CSA (1997), Fell et al. (2005).
Geohazard Assessment	<p>Combination of geohazard analysis and evaluation of results against a hazard tolerance standard (if existing). Geohazard assessment includes the following steps:</p> <ol style="list-style-type: none"> a. Geohazard analysis: identify the geohazard process, characterize the geohazard in terms of factors such as mechanism, causal factors, and trigger factors; estimate frequency and magnitude; develop geohazard scenarios; and estimate extent and intensity of geohazard scenarios. b. Comparison of estimated hazards with a hazard tolerance standard (if existing) 	Adapted from Fell et al. (2007)
Geohazard Event	Occurrence of a geohazard . May also be defined in reverse as a non- occurrence of a geohazard (when something doesn't happen that could have happened).	Adapted from ISO (2018)
Geohazard Intensity	A set of parameters related to the destructive power of a geohazard (e.g. depth, velocity, discharge, impact pressure, etc.)	BGC
Geohazard Inventory	Recognition of existing geohazards . These may be identified in geospatial (GIS) format, in a list or table of attributes, and/or listed in a risk register .	Adapted from CSA (1997)
Geohazard Magnitude	Size-related characteristics of a geohazard . May be described quantitatively or qualitatively. Parameters may include volume, discharge, distance (e.g., displacement, encroachment, scour depth), or acceleration. In general, it is recommended to use specific terms describing various size-related characteristics rather than the general term magnitude. Snow avalanche magnitude is defined differently, in classes that define destructive potential.	Adapted from CAA (2016)

Term	Definition	Source
Geohazard Risk	Measure of the probability and severity of an adverse effect to health, property the environment, or other things of value, resulting from a geophysical process. Estimated by the product of geohazard probability and consequence .	Adapted from CSA (1997)
Geohazard Scenario	Defined sequences of events describing a geohazard occurrence. Geohazard scenarios characterize parameters required to estimate risk such geohazard extent or runout exceedance probability , and intensity . Geohazard scenarios (as opposed to geohazard risk scenarios) typically consider the chain of events up to the point of impact with an element at risk, but do not include the chain of events following impact (the consequences).	Adapted from Fell et al. (2005)
Hazard	Process with the potential to result in some type of undesirable outcome. Hazards are described in terms of scenarios, which are specific events of a particular frequency and magnitude.	BGC
Inactive Alluvial Fan	Portions of the fan that are removed from active hydrogeomorphic or avulsion processes by severe fan erosion, also termed fan entrenchment.	BGC
LiDAR	Stands for Light Detection and Ranging, is a remote sensing method that uses light in the form of a pulsed laser to measure ranges (variable distances) to the Earth. These light pulses - combined with other data recorded by the airborne system - generate precise, three-dimensional information about the shape of the Earth and its surface characteristics.	National Oceanic and Atmospheric Administration, (n.d.).
Likelihood	Conditional probability of an outcome given a set of data, assumptions and information. Also used as a qualitative description of probability and frequency .	Fell et al. (2005)
Melton Ratio	Watershed relief divided by square root of watershed area. A parameter to assist in the determination of whether a creek is susceptible to flood, debris flood, or debris flow processes.	BGC
Nival	Hydrologic regime driven by melting snow.	Whitfield, Cannon and Reynolds (2002)
Orphaned	Without a party that is legally responsible for the maintenance and integrity of the structure.	BGC
Paleofan	Portion of a fan that developed during a different climate, base level or sediment transport regime and which will not be affected by contemporary geomorphic processes (debris flows, debris floods, floods) affecting the active fan surface	BGC

Term	Definition	Source
Paleochannel	An inactive channel that has partially been infilled with sediment. It was presumably formed at a time with different climate, base level or sediment transport regime.	BGC
Pluvial – hybrid	Hydrologic regime driven by rain in combination with something else.	BGC
Probability	<p>A measure of the degree of certainty. This measure has a value between zero (impossibility) and 1.0 (certainty) and must refer to a set like occurrence of an event in a certain period of time, or the outcome of a specific event. It is an estimate of the likelihood of the magnitude of the uncertain quantity, or the likelihood of the occurrence of the uncertain future event.</p> <p>There are two main interpretations:</p> <p>i) Statistical – frequency or fraction – The outcome of a repetitive experiment of some kind like flipping coins. It includes also the idea of population variability. Such a number is called an “objective” or relative frequentist probability because it exists in the real world and is in principle measurable by doing the experiment.</p> <p>ii) Subjective (or Bayesian) probability (degree of belief) – Quantified measure of belief, judgement, or confidence in the likelihood of an outcome, obtained by considering all available information honestly, fairly, and with a minimum of bias. Subjective probability is affected by the state of understanding of a process, judgement regarding an evaluation, or the quality and quantity of information. It may change over time as the state of knowledge changes.</p>	Fell et al. (2005)
Return Period (Recurrence Interval)	Estimated time interval between events of a similar size or intensity . Return period and recurrence interval are equivalent terms. Inverse of frequency .	BGC
Risk	Likelihood of a geohazard scenario occurring and resulting in a particular severity of consequence. In this report, risk is defined in terms of safety or damage level.	BGC
Rock (and debris) Slides	Sliding of a mass of rock (and debris).	BGC
Rock Fall	Detachment, fall, rolling, and bouncing of rock fragments.	BGC

Term	Definition	Source
Scour	The powerful and concentrated clearing and digging action of flowing air or water, especially the downward erosion by stream water in sweeping away mud and silt on the outside curve of a bend, or during a time of flood.	American Geological Institute (1972)
Steep-creek flood	Rapid flow of water and debris in a steep channel, often associated with avulsions and bank erosion and referred to as debris floods and debris flows.	BGC
Steep Creek Hazard	Earth-surface process involving water and varying concentrations of sediment or large woody debris. (see Appendix B of this report for detailed definition).	BGC
Uncertainty	<p>Indeterminacy of possible outcomes. Two types of uncertainty are commonly defined:</p> <ul style="list-style-type: none"> a) Aleatory uncertainty includes natural variability and is the result of the variability observed in known populations. It can be measured by statistical methods, and reflects uncertainties in the data resulting from factors such as random nature in space and time, small sample size, inconsistency, low representativeness (in samples), or poor data management. b) Epistemic uncertainty is model or parameter uncertainty reflecting a lack of knowledge or a subjective or internal uncertainty. It includes uncertainty regarding the veracity of a used scientific theory, or a belief about the occurrence of an event. It is subjective and may vary from one person to another. 	BGC
Waterbody	Ponds, lakes and reservoirs	BGC
Watercourse	Creeks, streams and rivers	BGC

REFERENCES

- American Geological Institute. (1972). *Glossary of Geology*. Washington, DC.: Author.
- American Geosciences Institute. (2011). *Glossary of Geology* (5th ed.). Virginia: Author.
- Bates, R.L. & Jackson, J.A. (1995). *Glossary of Geology* (2nd ed.). Virginia: American Geological Institute.
- Canadian Avalanche Association (CAA). (2016). Technical Aspects of Snow Avalanche Risk Management – Resources and Guidelines for Avalanche Practitioners in Canada (C. Campbell, S. Conger, B. Gould, P. Haegeli, B. Jamieson, & G. Statham Eds.). Revelstoke, BC, Canada: Canadian Avalanche Association.
- Canadian Standards Association (CSA). (1997). *CAN/CSA – Q859-97 Risk Management: Guideline for Decision Makers*. CSA Group, Toronto, ON, pp. 55.
- Fell, R., Ho., K.K.S., LaCasse, S., & Leroi, E. (2005). A framework for landslide risk assessment and management. In Hungr, O., Fell, R., Couture, R. (Eds.) *Landslide Risk Management: Proceedings of the International Conference on Landslide Risk Management*. Vancouver, BC.
- Fell, R., Whitt, G. Miner, A., & Flentje, P.N. (2007). Guideline for Landslide Susceptibility, Hazard and Risk Zoning for Land Use Planning. *Australian Geomechanics Journal* 42: 13-36.
- International Organization for Standardization (ISO). (2018). *ISO 31000:2018 Risk Management – Guidelines*. Retrieved from <https://www.iso.org/standard/65694.html>
- Ministry of Water, Land and Air Protection. (MWLAP) (2004). *Flood Hazard Area Land Use Management Guidelines*.
- National Oceanic and Atmospheric Administration. (n.d.) What is LIDAR? [Web page]. Retrieved from <https://oceanservice.noaa.gov/facts/lidar.html>
- Oxford University Press. (2008). *A dictionary of Earth Sciences* (3rd ed.). Oxford, England: Author.
- Porter, M., Jakob, M., & Holm, K. (2009, September). Proposed Landslide Risk Tolerance Criteria. *GeoHalifax 2009*. Paper presented at the meeting of the Canadian Geotechnical Society, Halifax, Canada.
- Whitfield, P.H., Cannon, A.J., & Reynolds, C.J. (2002). Modelling Streamflow in Present and Future Climates: Examples from the Georgia Basin, British Columbia. *Canadian Water Resources Journal*, 27(4), 427 – 456. <https://doi.org/10.4296/cwrj2704427>.

APPENDIX B SITE PHOTOGRAPHS



Photo 1.
Burton Creek, looking downstream at bridge on unmarked road and looking downstream.
Photo: BGC, November 27, 2019.



Photo 2.
Burton Creek, looking downstream from bridge on unmarked road and looking downstream.
Photo: BGC, November 27, 2019.



Photo 3.
Caribou Creek, upstream of the bridge on the Private Access Road and looking downstream.
Photo: Explore Inc., October 27, 2019.



Photo 4.
Caribou Creek, upstream of the bridge on the Private Access Road and looking downstream.
Photo: Explore Inc., October 27, 2019.



Photo 5.
Caribou Creek, downstream of the bridge on the Private Access Road and looking upstream.
Photo: Explore Inc., October 27, 2019.



Photo 6.
Upstream McCormack Bridge looking downstream.
Photo: Explore Inc., October 23, 2019.



Photo 7.
**Downstream McCormack
Bridge looking upstream.**
**Photo: Explore Inc., October 23,
2019.**



Photo 8.
**Upstream side of McCormack
Road looking west showing
placed riprap along left bank.**
**Photo: BGC, November 22,
2019.**



Photo 9.
Looking upstream from the McCormack Road bridge looking east showing placed riprap along left bank.
Photo: BGC, November 22, 2019.



Photo 10.
On Caribou Creek looking towards the Highway 6 Bridge and Lower Arrow Lake.
Photo: Explore Inc., December 13, 2019.



Photo 11.
**Looking west towards Lower
Arrow Lake and Highway 6
Bridge.**
**Photo: Explore Inc.,
December 13, 2019.**



Photo 12.
**Looking south along the
Highway 6 Bridge towards
Burton Creek.**
**Photo: Explore Inc.,
December 13, 2019.**



Photo 13.
Looking north along the
Highway 6 Bridge.
Photo: Explore Inc.,
December 13, 2019.



Photo 14.
Looking south-east at the
Highway 6 Bridge piers.
Photo: Explore Inc.,
December 13, 2019.



Photo 15.
**View of riprap placed along
right bank of Highway 6.
Volleyball placed for scale.
Photo: BGC, November 22,
2019.**



Photo 16.
**Looking north-east towards
Lower Arrow Lake, Highway 6
and Caribou Creek.
Photo: BGC, July 13, 2019.**



Photo 17.
Looking east towards Lower Arrow Lake, Highway 6, Caribou Creek (left) and Burton Creek (right). Photo: BGC, July 13, 2019.

APPENDIX C HYDROLOGICAL ANALYSIS METHODS

C.1. INTRODUCTION

Estimating flood magnitude is of fundamental importance to reliable floodplain mapping. As most watercourses are not gauged, flood magnitude is commonly estimated for an ungauged watershed using a Regional Flood Frequency Analysis (Regional FFA). There are several methods to complete a Regional FFA. This appendix documents the methodology followed by BGC Engineering Inc. (BGC) for the regionalization of floods in British Columbia using the index-flood method (Dalrymple 1960).

This appendix begins with a description of Regional FFA and the index-flood method (Section C1.0). The study area over which the index-flood is developed is discussed in Section C2.0. The data acquisition and compilation to support the analysis is described in Section C3.0. A description of the methods and assumptions for the regionalization of floods is included in Section C4.0. Results for the different hydrologic regions that cover the Regional District of Central Kootenay (RDCK) are presented in Section C5.0, while the application of the index-flood method to ungauged watersheds in the RDCK is presented in Section C6.0. Finally, the limitations of the study are discussed in Section C7.0.

C.1.1. Regional FFA

Extreme events are rare by definition and record lengths at hydrometric stations are often short. Regional FFA accounts for short record lengths by trading space for time where flood events at several hydrometric stations are pooled to estimate flood magnitude in a homogeneous region. Homogeneous regions can be defined as geographically contiguous regions, geographically non-contiguous regions, or as hydrological neighbourhoods. Grouping watershed areas of similar watershed characteristics into homogeneous regions is a critical part of Regional FFA because hydrologic information can be transferred accurately only within a region that is homogeneous. The more homogeneous a region is, the more reliable the flood quantile estimates. Some heterogeneity may be deemed acceptable in some cases. Studies show that even moderately heterogeneous regions can yield more accurate flood quantile estimates than a single-station FFA (Hosking & Wallis, 1997).

C.1.2. Index-flood Method

Several methods have been developed to conduct a Regional FFA in homogeneous regions. Among the quantile estimation methods, the index-flood is considered superior to other models (Ouarda et al., 2008). The index-flood is a method of regionalization with a long history in FFA (Dalrymple, 1960). The index-flood method involves the development of a dimensionless regional growth curve assumed to be constant within a homogenous region. The index-flood method also requires the selection of an index-flood which can be the mean annual flood, the median annual flood, or another quantile of choice calculated at each hydrometric station in the region.

The probability distribution of flood events at hydrometric stations in a homogeneous region are identical apart from a site-specific scaling factor, the index-flood. The parameters of the probability

distribution are estimated at each hydrometric station. These at-site estimates are combined using a weighted average to generate a regional estimate. The regional growth curve is thus a dimensionless quantile function common to every hydrometric station in the region and takes on the following form (Eq. C-1):

$$X_T = Q_T / Q_m \quad \text{[Eq. C-1]}$$

where X_T is the growth factor for return period T , Q_T is the flood magnitude at return period T , and Q_m is the index-flood magnitude. The flood magnitude at any return period is calculated using this relationship given the index-flood estimate.

C.1.3. Application to Ungauged Watersheds

The index-flood method can be applied to an ungauged watershed by developing a regional relationship between the index-flood and watershed characteristics at hydrometric stations in the region. The relationship can be expressed in many forms including a multivariate linear regression. Flood events can be assumed to depend on the characteristics of individual watersheds such as area, elevation, percent lake, forest coverage, mean annual precipitation, mean annual temperature, etc. Once the watershed characteristics are extracted at the ungauged site, the index-flood can be estimated. The flood magnitude of any annual exceedance probability (AEP) can be estimated for an ungauged watershed using the index-flood estimate and the regional growth curve by re-organizing equation Eq. C1-1.

C.2. STUDY AREA

A Regional FFA for British Columbia represents a considerable challenge given its regional variations in precipitation caused by sharp changes in topography as well as diverse geology. The proportion of annual precipitation that falls as snow as opposed to rain increases with latitude, elevation, and distance from the Pacific Ocean. Significant regional variations in precipitation are observed in British Columbia, influenced by the various mountain ranges. Storms approaching the West Coast are lifted rapidly along the windward mountain slopes, resulting in widespread precipitation. A rain shadow is created on the lee side of the mountains. For example, Tofino receives an average of 3,160 mm of annual precipitation while Nanaimo, on the east coast of Vancouver Island, receives 1,060 mm.

This climate pattern is repeated several times from east to west. As the weather systems approach the Coast Mountains, orographic effects result in twice as much precipitation in North Vancouver compared to Vancouver proper. Moving to the east, the Okanagan Valley is located on the lee side of the Coast Mountains resulting in an arid to semi-arid climate with annual precipitation on the order of 350 mm. The cycle is repeated over the Monashees, the Columbia Trench, and the Rocky Mountains. These orographic effects impact flood events and complicate regionalization efforts due to significant areal variations in precipitation, even for small watersheds. These significant variations in precipitation suggest that a multivariate approach to regionalization is practical for British Columbia.

Similar to precipitation, surficial geology in the province demonstrates significant spatial variability. This variability is important in that while two watersheds may be located in a similar precipitation zone, the hydrologic response can be significantly different. Watersheds dominated by colluvial veneers and bedrock will tend to have larger unit peak flows, than those mantled by coarse morainal sediment, with the latter tending to attenuate peak flows through available soil moisture storage. To avoid introducing boundary effects at the border with the United States and Alberta, the study area was extended to include the northern portion of Washington, Idaho, and Montana as well as the eastern Slopes of the Rocky Mountains. A map of the study area is presented in Figure C-1.



Figure C-1. Study area where the red outline defines the boundary.

C.3. DATA ACQUISITION AND COMPILATION

A large component of this study consisted of acquiring the data and compiling it in a format that was usable for analysis. Suitable hydrometric stations in the study area were identified and the flood records were acquired from the appropriate monitoring agency. The watershed polygons upstream from the hydrometric stations were then delineated and the area calculated using

methods specific to the scale of the watershed. Lastly, a suite of watershed characteristics was selected based on potential to influence flood events. These watershed characteristics were extracted for each polygon. The acquisition and the compilation of this rich dataset was the most time-consuming portion of the procedure. The following sections include a detailed description of how the data were acquired and how the dataset was compiled for analysis.

C.3.1. Hydrometric Stations

A total of 3,309 hydrometric stations are located within the study area. Of these, 2115 are managed by the Water Survey of Canada (WSC) and the remaining 1194 are managed by the United States Geological Survey (USGS).

C.3.2. Flood Records

As an initial step, all flood events recorded at the hydrometric stations were extracted. This extraction was challenging as records are stored differently by the WSC and USGS. In Canada, flood events are stored in the HYDAT database, which includes the annual maximum peak instantaneous discharge, the maximum average daily discharge, as well as the date and time of each event. The watershed area and the number of years on record are also available in the HYDAT database. The flood records were acquired directly from the HYDAT database for hydrometric stations in Canada. In the US, flood events are stored online on websites specific to each hydrometric station. The annual maximum peak instantaneous discharge, the watershed area, and the number of years on record are also stored in this way. This information was extracted from the online storage space using a programming script for each USGS hydrometric station.

C.3.3. Maximum Peak Instantaneous Discharge

The preferred metric for analysis is the annual maximum peak instantaneous discharge. However, it is not uncommon for flood records to have more annual maximum average daily discharge records than peak instantaneous values, which are greater in magnitude. The ratio (I/D) between maximum peak instantaneous and maximum average daily discharge is typically greater for small watersheds than for very large watersheds. Therefore, where only a maximum daily discharge is reported for some years, maximum peak instantaneous discharge values can be estimated from available maximum average daily discharge records using regression analysis.

The reliability of the regression analysis was judged based on the coefficient of determination (R^2) in combination with the Cook distance (D). The R^2 is the proportion of the variance in the peak instantaneous discharge that is predictable from the average daily discharge. The D value is computed for every record within a sample and is used to assess the influence of each record on the regression (e.g., outliers). The regression analysis was deemed acceptable by BGC if the R^2 is above 0.95 and the maximum D value was less than 25. In this case, the maximum peak instantaneous discharge record was extended using the regression analysis for a longer record length. Alternatively, maximum peak instantaneous discharge record remained as-is where the regression analysis was deemed unacceptable.

C.3.4. Watershed Polygons

The watershed polygons at hydrometric stations within the study area were estimated using two different approaches.

1. River Networks Tools™¹ (RNT)
2. Using an Environmental Systems Research Institute (ESRI) process (i.e., GIS-based).

The RNT-based approach is dependent on the delineation of a stream network, while the ESRI-based process is dependent on topographic data. Watershed polygons were defined for all hydrometric stations located within the study area. Watershed delineation based on a stream network was observed to be more reliable for small watersheds, especially where topographic relief is low. The watershed polygons defined by the ESRI process were selected for larger watersheds (>1,000 km²), while the RNT-based approaches were selected for smaller watershed areas (<1,000 km²). The selection of the best watershed polygon for analysis could not be checked directly as the monitoring agencies (WSC and USGS) do not publish polygon shape information.

C.3.5. Watershed Areas

The watershed area was estimated for each watershed polygon (RNT, modification based on RNT, and ESRI) at each hydrometric station. The watershed area for each polygon was then compared with the value published by the respective monitoring agency. The watershed area published by monitoring agencies is generally considered most reliable (although recognizing many of the watershed areas for the WSC stations were calculated with 1:50,000 scale mapping and may not reflect more recent topographic mapping) and was used to quality check the calculated areas.

The estimated value of the watershed area was deemed acceptable if it was within $\pm 15\%$ of the published value. If more than 1 watershed area estimate (of the 3) was within $\pm 15\%$ of the published value, the watershed area with the smallest difference relative to the published value was selected as the best estimate for analysis. Approximately 90% of watershed polygons were within $\pm 15\%$ of the published value.

Published values are not available for all hydrometric stations. In those cases, the watershed area was deemed acceptable if the 3 estimates were within $\pm 15\%$ of each other. Watershed areas that did not meet the $\pm 15\%$ criteria were not included in the analysis. A total of 2269 hydrometric stations were removed from the analysis because either the watershed area was deemed unreliable or water level data only was recorded at the station. Manual quality checks were not completed for these watersheds due to the time-consuming nature of this effort. The number of hydrometric stations lost that could have been considered useful is considered negligible. The

¹ The RNT is a proprietary software developed by BGC. RNT is based on publicly available 1:24,000-scale or better topographic and hydrographic datasets throughout North America that BGC has compiled and systematically developed to support a wide range of hydrotechnical calculations (e.g., watershed area) and site-specific precipitation and flood monitoring.

number of hydrometric stations in the study area is summarized in Table C-1. The ESRI watershed polygons were used for the hydrometric stations at the border between Canada and the United States because the polygons based on the two RNT approaches are observed to be poorly delineated due to differences in data resolution available between both countries.

Table C-1. Number of hydrometric stations in the study area.

Criteria	Number
Hydrometric Stations in Study Area	3284
Station with Unacceptable Watershed Area Estimates	2269
Stations with Acceptable Watershed Area Estimates	1015

C.3.6. Watershed Characteristics

Watershed characteristics were selected based on potential to influence flood events. A suite of 18 watershed characteristics was ultimately selected and estimated for each hydrometric station, as summarized in Table C-2. Several data sources were used to compile the watershed characteristics which are described in the following sections.

C.3.6.1. Watershed Statistics

The Shuttle Radar Topography Mission (STRM) dataset (Farr et al. 2007) was used to extract the watershed elevation statistics. The watershed elevation statistics were averaged over the watershed area. This dataset was used to calculate the watershed area (just for watersheds over 1000 km²), relief, length, and slope. The centroid statistics were also extracted from this dataset.

C.3.6.2. Climate Variables

The Climate North America (ClimateNA) dataset was used to estimate the climate variables for each watershed polygon (Wang et al., 2016). The climate variables were averaged over the watershed area and were based on the average for the period 1961 to 1990.

Table C-2. List of selected watershed characteristics.

Type	No.	Acronym	Characteristic	Units	Dataset
Watershed	1	Centroid_Lat	Latitude at the centroid location in the watershed polygon	degrees	STRM
	2	Centroid_Long	Longitude at the centroid location in the watershed polygon	degrees	
	3	Centroid_Elev	Elevation at the centroid location in the watershed polygon	m	
	4	Area	Area of the watershed polygon	km ²	
	5	Relief	Maximum minus minimum watershed elevation	m	
	6	Length	Area divided by perimeter	km	
	7	Slope	Watershed length divided by relief times 100	%	
Climate	8	MAP	Mean annual precipitation	mm	Climate NA
	9	MAT	Mean annual temperature	°C	
	10	PAS	Precipitation as snow	mm	
	11	PPT_wt	Winter precipitation (Dec, Jan, Feb)	mm	
	12	PPT_sp	Spring precipitation (Mar, Apr, May)	mm	
	13	PPT_sm	Summer precipitation (Jun, Jul, Aug)	mm	
	14	PPT_fl	Fall precipitation (Sep, Oct, Nov)	mm	
Physiographic	15	Forest	Forest cover in the watershed	%	NALCMS
	16	Water_Wetland	Wetland and open water cover in the watershed	%	
	17	Urban	Urban cover in the watershed	%	
	18	CN	Inferred based on integrating land cover and soils cover	unitless	NALCMS and HYSOGs250m

C.3.6.3. Land cover

The North American Land Change Monitoring System (NALCMS) land cover products include the 2005 land cover map of North America. This dataset includes 19 land cover classes derived from 250 m Moderate Resolution Spectroradiometer (MODIS) image composites (Latifovic et al. 2012). This dataset was used to calculate the percent forest, percent wetland and lake, and the urban portion of the watershed.

C.3.6.4. Curve Number

The curve number (CN) is an empirical parameter used for predicting runoff from rainfall. BGC integrated the land cover (NALCMS) and the hydrologic soils group (HYSOGs250m) datasets to

infer the average CN over each watershed. The NALCMS dataset is described in Section A.3.5.3. The HYSOGs250m dataset represents typical soil runoff potential at a 250 m spatial resolution (Ross et al., 2018). Hydrologic soils groups are defined based on soil texture, depth to bedrock or depth to groundwater. There are four basic groups: A, B, C, D. Four additional groups are included where the depth to bedrock is considered to be less than 60 cm: AD, BD, CD, and DD. The area covered by each hydrologic soils group is summed for a total area over the watershed for each hydrologic soils group.

The CN was assigned following guidance from the USGS (1986). The CN values for soils where the depth to bedrock or depth to groundwater is expected to be less than 0.6 m from the surface (i.e., D soils) were assumed to be the same as the case where it is not expected to be close to the ground surface. The CN value assignment for the combinations of land cover and hydrologic soils groups identified in the watersheds is presented in Table C-3. The CN values were averaged over the watershed area using a weighted mean. The weight reflects the percentage of the area covered by a given CN value.

Table C-3. CN values based on the integration between the land cover and soils datasets.

Land Cover (NALCMS 2005)	Cover Type (USGS 1986)	Soils			
		HSG-A	HSG-B	HSG-C	HSG-D
Temperate or sub-polar needleleaf forest	Woods - Good	30	55	70	77
Temperate or sub-polar broadleaf deciduous forest	Woods - Good	30	55	70	77
Mixed forest	Woods - Good	30	55	70	77
Temperate or sub-polar shrubland	Brush - brush-weed-grass mixture with brush the major element - Fair	35	56	70	77
Temperate or sub-polar grassland	Pasture, grassland, or range—continuous for grazing - Good	39	61	74	80
Sub-polar or polar grassland-lichen-moss	Pasture, grassland, or range—continuous for grazing - Good	39	61	74	80
Sub-polar or polar barren-lichen-moss	Desert shrub - major plants include saltbrush. Greasewood, creosotebush, blackbrish, bursage, palo verde, mesquite, and cactus - good	49	68	79	84
Sub-polar taiga needleleaf forest	Woods - Good	30	55	70	77
Cropland	Row crops - straight row (SR)	63	74	81	85
Barren land	Desert shrub - major plants include saltbrush. Greasewood, creosotebush, blackbrish, bursage, palo verde, mesquite, and cactus - good	49	68	79	84
Urban and built-up	Urban districts - commercial and business	89	92	94	95
Snow and ice	NA	0	0	0	0
Wetland	NA	0	0	0	0
Water	NA	0	0	0	0

C.4. METHODS AND ASSUMPTIONS

Once the dataset is compiled for analysis, the regionalization of floods procedure can begin. A description of the methods and assumptions for the index-flood method is included in this section.

C.4.1. Flood Statistics Calculations

Flood statistics were calculated using the flood record at each of the selected hydrometric stations (2101) in the study area. Flood statistics include L-moments and flood quantile estimates.

C.4.1.1. L-moments

The L-moment approach in the index-flood procedure was used by BGC for the regionalization of floods in British Columbia. The shape of a probability distribution has traditionally been described by the moments of the distribution including the mean, standard deviation, skewness, and kurtosis. However, moment estimators have some undesirable properties where the skewness and kurtosis can be severely biased. Both have algebraic bounds that depend on the sample size (Hosking & Wallis 1997).

L-moments are an alternative system for describing the shape of probability distributions. Studies have shown that L-moments are unbiased, less sensitive to outliers, and are better estimators of distribution parameters especially for short to moderate record length (Hosking, 1990). Furthermore, L-moments allow for the efficient computation of parameter estimates and flood quantile estimates.

L-moments evolved as modifications to the probability weighted moments (Greenwood et al., 1979). In terms of probability weighted moments, L-moments are defined as λ_1 , λ_2 , λ_3 , and λ_4 with their mathematical expressions published for a range of probability distributions in Hosking and Wallis (1997, Appendix).

Dimensionless versions of L-moments are defined as L-moment ratios by dividing the higher order L-moments by λ_2 . L-moment ratios are defined by Eq. C-2:

$$\tau_r = \lambda_r / \lambda_2 \quad [\text{Eq. C-2}]$$

L-moment ratios depict the shape of a distribution independently of its scale measurement. Refer to Table C-4 for L-moment terminology.

Table C-4. L-moment terminology.

Symbol (population)	Symbol (sample)	Definition
λ_1	l_1	L-location or the mean of the distribution
λ_2	l_2	L-scale
τ	t	L-CV
τ_3	t_3	L-skewness
τ_4	t_4	L-kurtosis

C.4.1.2. At-site Peak Discharge Estimates

The flood quantile estimates at hydrometric stations are referred to as ‘at-site’ estimates and are used to compare with the modeled quantile estimates to assess the validity of the model. Flood quantile estimates were calculated using the flood data by means of a single-station FFA. A popular approach in FFA is the Annual Maximum Series (AMS) where the maximum peak instantaneous discharge for each year on record is used for analysis. The basic assumption is that the flood events are independent and identically distributed from a single population of flood events.

A probability distribution is selected to describe the flood events in the record. The true form of the underlying probability distribution is not known and there is no standard distribution appropriate in all cases. The goal is to select a probability distribution that fits the observed data well but also generates robust quantile estimates that are not sensitive to physical deviations of the true probability distribution (Hosking & Wallis, 1997). In extreme value statistics, data follow one of three extremal types of distributions: Gumbel, Fréchet, or Weibull (Coles, 2001). These three distributions can be expressed as a single formula and are considered a family of distributions known as the Generalized Extreme Value (GEV) distribution. The GEV distribution is shown to arise as an asymptotic model for maximum values in a sample and hence can be viewed as a natural model for observed flood events. In addition, the GEV distribution has been identified as a preferred probability distribution for at-site flood quantile estimates in Canada (Zhang et al., 2019). For these reasons, the GEV distribution was used to describe the recorded flood events. No statistical tests were used to assess this choice because the GEV distribution is considered flexible to account for the variability captured at a single hydrometric station.

The parameters of the GEV distribution were estimated using the L-moments. The flood quantiles were calculated for a range of return periods (Table C-5). The reliability of the quantile estimates depends on a range of factors including the record length and the range of flood event magnitudes captured in the record. The longer the record length, the more reliable the quantile estimates.

Table C-5. Return period and associated AEP.

Return Period (Years)	AEP
2	0.5
5	0.2
10	0.1
20	0.05
50	0.02
100	0.001
200	0.005
500	0.002

C.4.2. Formation of Hydrological Regions

The watershed characteristics extracted over the watershed polygons were used to group the hydrometric stations into hydrological regions using a cluster analysis. Cluster analysis is an objective method for creating regions (Tasker, 1982) which historically were based subjectively using geographical, political, administrative or physiographic boundaries. The essence of cluster analysis is to identify clusters (groups) of hydrometric stations such that the stations within a cluster are similar while there is dissimilarity between the clusters. Hosking and Wallis (1997) suggest that cluster analysis is the most practical method of forming regions for large datasets and provides several opportunities for subjective adjustments to the regions. The algorithm used by BGC to group hydrometric stations is Agglomerative Hierarchical Clustering.

C.4.2.1. Data Preparation

The watershed characteristics at each hydrometric station were normalized so that the average is zero and the standard deviation is approximately 1. The distance metric used is the Euclidian distance between the watershed characteristics. The suite of watershed characteristics at all hydrometric stations were compared to one another and organised using Ward's Distance measure (d) (Ward, 1963).

C.4.2.2. Number of Hydrological Regions

Several statistical measures were used to guide the number of clusters to partition the hydrometric stations. The statistical measures include the Elbow Method, the Silhouette Score, and review of the dendrogram. The selection of the number of clusters was also subjectively assessed by reviewing the physical basis of the cluster distribution (e.g., is there a physical meaning behind the number and distribution of the clusters?).

The Elbow Method accounts for the percentage of variance explained as a function of the number of clusters. The percentage of the variance explained decreases with increasing number of

clusters. The minimum number of clusters that provides the most gain in the variance explained was selected for analysis.

The Silhouette Score is a measure of how similar the watershed of a hydrometric station is to its own cluster compared to other clusters. The Silhouette Score was calculated for each hydrometric gauge station and averaged over each cluster. The Silhouette Score ranges from -1 to +1 where a high value indicates that the hydrometric stations are well matched to their own clusters and poorly matched to neighboring clusters.

The dendrogram represents how the clustering algorithm (i.e., agglomerative hierarchical clustering) groups the watersheds and depicts a road map of the merging procedure showing which watersheds were merged and when in order of increasing cluster distance.

The spatial distribution of the clusters was then reviewed to verify that they are physically plausible. This review was done by superimposing the clusters on a map of British Columbia to see whether there is a physical meaning supporting the cluster distributions.

C.4.2.3. Manual Adjustments of Hydrologic Regions

The clusters identified using the clustering algorithm were adjusted manually to increase homogeneity. The manual adjustments were completed by considering the topography, spatial patterns in hydrological processes, and ecozones in Canada. The clusters were further separated based on the scale of watershed area to respect the statistical requirement for constancy in the coefficient of variation (CV) for homogeneous regions.

C.4.2.4. Refinement of the Hydrometric Station Selection

The hydrometric station selection was refined to increase the homogeneity of the clusters by reducing the variability introduced by many hydrometric stations. The refinement process was guided by the following 5 criteria.

1. Watersheds upstream of hydrometric stations with a regulation level greater than 25% were not included for analysis. The level of regulation is inferred by proportion of the watershed area upstream of the dams to the total watershed area upstream of the hydrometric station.
2. The watershed area range considered in the regionalization extends up to 5,000 km². Watersheds with a greater watershed area size are most likely well gauged and studied that a regionalization of flood is not required.
3. Nested hydrometric stations along the same watercourse were also removed from the region to reduce cross-correlation.
4. A minimum of 6 years of maximum peak instantaneous discharge data was set as a minimum for analysis. While this threshold is low, it is considered adequate since the influence of each hydrometric stations on the model reflects the record length.
5. Hydrometric stations recording water level only were excluded from the analysis at the onset. Hydrometric stations recording water level and discharge measurements but located within or immediately at the outlet of lakes were also removed from the analysis.

The flow regime at these locations is considered heavily regulated precluding the use of frequency analysis to estimate peak flows.

In addition to these criteria, discordancy (D_i) was considered to refine the selection. The discordancy is measured in term of the L-moments of the data at the hydrometric stations within a cluster. The formal definition for D_i is found in Hosking and Wallis (1997, equation 3.3, page 46). A hydrometric station is considered discordant if D_i is “large”. The definition of “large” depends on the number of hydrometric stations in the cluster. If the cluster includes more than 15 hydrometric stations, the critical value for the discordancy statistic is 3. Discordancy was calculated for each hydrometric station within each hydrologic region. Hydrometric stations with D_i values greater than 3 were removed from the cluster. This process was re-iterated until no more hydrometric stations showed D_i values greater than 3.

C.4.2.5. Testing for Homogeneity

The hypothesis for homogeneity is that the probability distribution of the flood events at the hydrometric stations within a cluster is the same except for a site-specific scale factor. The goal is to have clusters that are sufficiently homogenous that the regionalization of floods is advantageous to a single station FFA. Testing for homogeneity is done using the H-Test. The H-Test result helps assess whether the hydrometric stations in a cluster may reasonably be considered homogeneous. The formal definition for the H-Test is found in Hosking and Wallis (1997, equation 4.5, page 63). Of note, some level of heterogeneity is expected in these clusters due to the natural variability of hydrological processes that control flood events. The H-Test is not intended to be used as a significance test but rather as a guideline to inform whether the re-definition of a region could lead to a meaningful increase in the accuracy of the flood quantile estimates (Hosking and Wallis 1993).

C.4.3. Regionalization

Once the clusters were considered sufficiently homogeneous, they were considered “hydrologic regions”. The regionalization of floods was then completed for each region. The L-moment approach in the index-flood procedure was used by BGC for the regionalization exercise. The procedure for each hydrologic region included: averaging the L-moments, selecting a distribution, estimating the parameters, developing the growth curve, and estimating the index-flood. The mean annual flood (MAF) was selected as the index-flood for this study. The following sections describe the methods and assumptions for the regionalization of floods for a given hydrologic region.

C.4.3.1. Regional L-moments

The L-moment ratios were averaged over each hydrologic region. A weighted average was used where the weight reflected the number of observations at each hydrometric station. The weighted average was used to put more weight on hydrometric stations with a longer record length. The weighted average helps take advantage of all available data as it is often limited in many areas of the province. The regional average L-moment ratios are defined in Table C-6. The L-moment

ratios are used rather than the L-moments because they yield slightly more accurate quantile estimates.

Table C-6. Definition for regional average L-moment ratios.

Symbol (sample)	Definition
l_1^R	L-location or the mean of the distribution
l_2^R	L-scale
t^R	L-CV
t_3^R	L-skewness
t_4^R	L-kurtosis

C.4.3.2. Distribution Selection for Growth Curves

The selection of an appropriate probability distribution for the growth curves was done using a goodness-of-fit test and review of L-moment ratio diagrams. These tests were completed to assess the variability imposed compiling the results of many hydrometric stations into a single growth curve. The goodness-of-fit test was based on 1,000 simulations and looked at a suite of candidate distributions. The candidate probability distributions included Generalised Logistic (GLO), Generalised Extreme Value (GEV), Generalised Pareto (GPA), Generalised Normal (GNO), and Pearson Type III (PE3). Probability distributions with Z statistics ≤ 1.64 were deemed acceptable (Hosking & Wallis, 1997). The regional L-moments were also plotted with the L-skewness and L-kurtosis relationships for two (Exponential (E), Gumbel (G), Logistic (L), Normal (N), and Uniform (U)) and three-parameter (GLO, GEV, GPA, GNP, PE3) candidate distributions in L-moment ratio diagrams. The plotting position of the regional L-moments was reviewed for the distribution selection that provided an acceptably close visual fit.

C.4.3.3. Parameter Estimation

The regional L-moments were used to estimate the parameters of the selected probability distribution. The equations used to estimate the parameters for the GEV distribution are found in Hosking and Wallis (1997, A.52, A.55, and A.56, page 196) in addition to other select probability distributions.

C.4.3.4. Growth Curves and Error Bounds

The index-flood was selected to be the MAF. As a result, the regional mean was set to 1 ($l_1^R = 1$). The probability distribution was fit by equating the L-moment ratios of the population ($\lambda_1, \tau, \tau_3, \tau_4$) to the regional average L-moment ratios (l_1^R, t^R, t_3^R, t_4^R).

One of the strengths of the Regional FFA completed using the regional L-moments is that the procedure is useful even when the assumptions are not all satisfied (e.g., possibility of heterogeneity, misspecification of the probability distribution, and statistical dependence between observations at different sites). An approach to estimate the accuracy of the estimated flood

quantiles is by Monte Carlo simulation. A Monte Carlo simulation was therefore run to estimate the variability in the quantile estimates from the regional GEV distribution. This variability was used to set the error bounds on the regional growth curve.

C.4.3.5. Index-flood Estimation

The index-flood was estimated using a multiple linear regression. Regression is a classic statistical method to describe the relationship between a dependent variable (index-flood) and independent variables (watershed characteristics). The multiple linear regression model is expressed as follows:

$$Q_T = aA^bB^c \dots N^n \quad \text{[Eq. C-3]}$$

where Q_T is the flood magnitude at return period T , A, B, \dots, N are the watershed characteristics, a is the regression constant, and b, c, \dots, n are the regression coefficients. Base 10 logarithms are used to convert this equation to a linear form by transforming the variables to the following:

$$\log Q_T = \log a + b(\log A) + c(\log B) + \dots + n(\log N) \quad \text{[Eq. C-4]}$$

These coefficients were estimated using the Weighted Least Squares method introduced by Tasker (1980), which accounts for the sampling error introduced by unequal record lengths. Unequal record lengths mean that the sampling errors of the observations (flood quantiles) are not equal (heteroscedastic) and the assumption of constant variance in Ordinary Least Squares method is not valid.

The top 5 models were selected using consideration for the adjusted R^2 and the Bayesian information criterion (BIC). The 5 models with the lowest BIC were selected and the index-flood estimate was averaged. Select diagnostic plots were reviewed to control the quality of the regressions. The diagnostic plots are listed in Table C-7. The index-flood model was developed over two scales: regional and provincial. These two scales were compared to assess the influence of the distribution of hydrometric stations on the reliability of the MAF estimate.

Table C-7. Diagnostic plots.

Plot	Diagnostic
At-site vs. Modeled	Inspect for a one to one relationship as close to as possible
At-site Quantile vs. Modeled Quantile	Inspect whether the distribution of the fitted values match the distribution of the observed values
At-site Quantiles vs. Modeled Residuals	Inspect for constancy in residuals. Residuals are the differences between the at-site and the modeled estimates

C.4.3.6. Regional Model

The first scale considered is the regional scale where the MAF was modeled over an area consistent with the hydrologic regions defined across the province. This scale is consistent with the scale used to do develop the regional growth curves.

C.4.3.7. Provincial Model

The second scale considered is the provincial scale where all hydrometric stations across the province, that meet the selection criteria, were used to model the MAF. The provincial model was developed to capture the range of hydrological processes that control flood events in British Columbia.

C.4.3.8. Flood Quantile Estimates

Flood quantile were than estimated using the regional growth curve and index-flood estimates (both scales) for all hydrometric stations in a given region. Quantile plots were generated to compare the at-site and modeled results over the range of AEPs.

C.4.3.9. Watershed Characteristic Transformations

The relationship between flood events and watershed characteristics need not be linear. Experience and judgement were used to guide the selection of independent variables and inform the relationship between flood events and watershed characteristics. An exhaustive comparison of correlations between flood magnitude and watershed characteristics showed that watershed area and watershed length are proportional to flood magnitude. For this analysis, the remaining watershed characteristics needed to be log transformed.

C.4.4. Error Statistics

The quality of the flood quantile estimates was assessed using select error statistics including the Root Mean Square Error (SRMSE), the Percent Error (SPE), and the Bias (SBIAS) for the following AEPs: 0.5, 0.1, 0.02, 0.005. The standardized version of the error statistics is used to account for the different scales (Table C-8).

Table C-8. Error statistics, definitions, and diagnostic.

Error Statistic (acronym)	Definition	Diagnostic
SRMSE	Standard deviation of the residuals.	Inspect how concentrated the modeled estimates are around the line of best fit.
SPE	The difference between the modeled and at-site estimate, divided by the at-site estimate, multiplied by 100%.	Inspect how close the modeled estimate is to the at-site estimate/
SBIAS	The tendency to overestimate or underestimate the modeled variable.	Inspect for a consistent over or underestimate of the modeled variable

The mathematical expressions for the SRMSE, SPE, and SBIAS are included below in Eq. C-5, Eq. C-6, and Eq. C-7.

$$SRMSE = \sqrt{\frac{\sum_{i=1}^{Np} \left(\frac{Qm_{mod}^i - Qm_{at-site}^i}{Qm_{at-site}^i} \right)^2}{Np}} \quad [\text{Eq. C-5}]$$

$$SPE = \frac{\sum_{i=1}^{Np} \text{abs} \left(\frac{Qm_{mod}^i - Qm_{at-site}^i}{Qm_{at-site}^i} \right)}{Np} * 100 \quad [\text{Eq. C-6}]$$

$$SBIAS = \frac{\sum_{i=1}^{Np} \left(\frac{Qm_{mod}^i - Qm_{at-site}^i}{Qm_{at-site}^i} \right)}{Np} \quad [\text{Eq. C-7}]$$

C.4.5. Decision Tree

A decision tree model was used to assign hydrologic regions to ungauged watersheds. A decision tree was built using the Random Forest classification algorithm. The decision tree model was based on the watershed characteristics at the hydrometric stations in the study area. A total of 500 random samples were pulled from the dataset (with replacement). From each random sample, a decision tree was generated by using 3 variables at each decision point. The hydrologic region assignment was based on majority votes. The out-of-bag (OBB) error rate was 7.2%. The OBB is a method of measuring the prediction error specific to random forest algorithms.

C.4.6. Statistical Software

The statistical software used by BGC for the analysis was R (R Core Team, 2019). R is a free software environment for statistical computing. The analysis is completed with support from several packages. These packages are listed in Table C-9 for reference.

Table C-9. Analysis and associated R package.

Analysis	R Packages	Authors
Flood Statistics	Lmom	J. R. M. Hosking
Clustering	stats	R Core Team
Discordancy, H-Test, Distribution Selection, Parameter Estimation, and Growth Curve Development	lmomRFA	J. R. M. Hosking
Index-flood Estimation	stats and leaps	R Core Team and Alan Miller
Random Forest decision tree	Rpart, randomForest	Andy Liaw and Matthew Wiener

C.5. RESULTS

C.5.1. Hydrometric Station Selection

A total of 1015 hydrometric stations were included in the analysis. The hydrometric stations were distributed across the study area with a greater concentration in the south compared to the north, largely reflecting population density. There is also a greater concentration of hydrometric stations in the United States than Canada (Figure C-2).

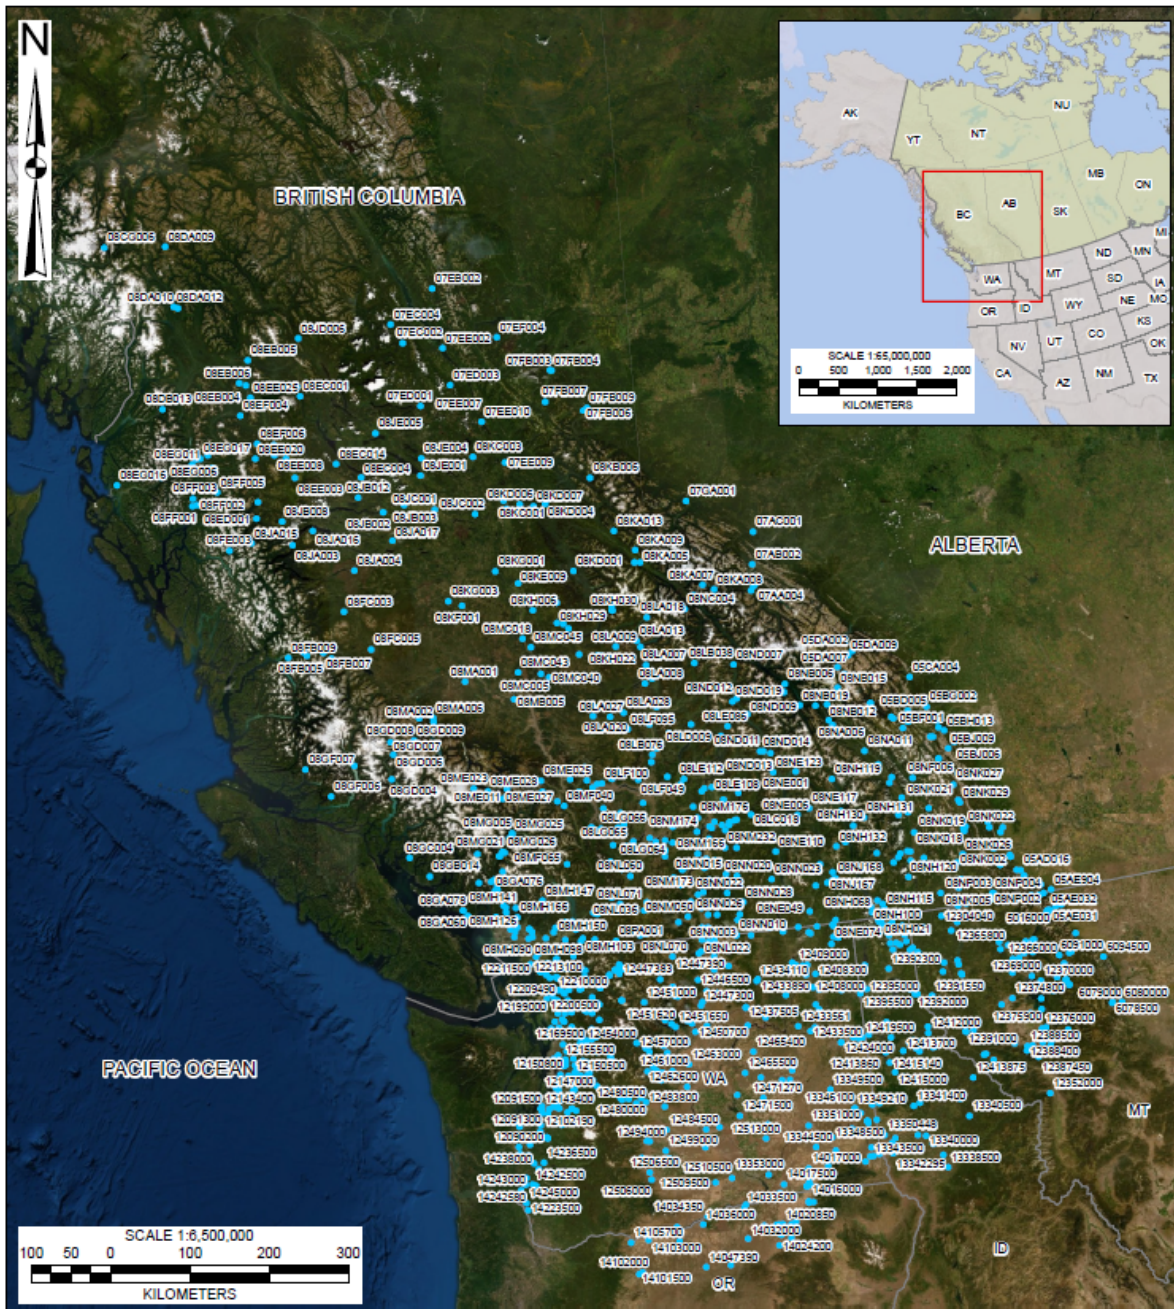


Figure C-2. Distribution of hydrometric stations within the study area.

The 18 watershed characteristics and their range in magnitude are summarized over the 1015 hydrometric stations in Table C-10. The climate watershed characteristics show a wide range in magnitude which is not surprising considering the sharp regional contrast imposed by the topography. The urban watersheds are concentrated in coastal Washington.

Table C-10. Summary of watershed characteristics, including the mean, maximum, and minimum values over all hydrometric stations considered for analysis (1,015).

Type	No.	Acronym	Mean	Min	Max	Standard Deviation
Watershed	1	Centroid_Lat	49.3092758	43.75066	57.094597	2.3
	2	Centroid_Long	-119.5562752	-130.965466	-112.917172	3.5
	3	Centroid_Elev	1,133	18	3,046	534
	4	Area	7,572	1.3	601,746	38,417
	5	Relief	1,639	19	4,355	791
	6	Length	5	0.2	71	7
	7	Slope	62	4	350	49
Climate	8	MAP	1,299	218	4,173	787
	9	MAT	4.1	-3.0	10.9	3.0
	10	PAS	499	25	2191	323
	11	PPT_wt	476	71	1,683	328
	12	PPT_sp	283	56	955	173
	13	PPT_sm	185	31	522	77
	14	PPT_fl	355	58	1,329	249
Physiographic	15	Forest	61	0	100	25
	16	Water_Wetland	1	0	18	2
	17	Urban	2	0	100	12
	18	CN	68	55	94	6

C.5.2. Formation of Hydrological Regions

Based on an iterative selection process, the 1,015 hydrometric stations were ultimately organized into 10 clusters. The results of the Elbow Method showed that a selection of approximately 10 hydrological regions explained the most variance in the watershed characteristics (Figure C-3).

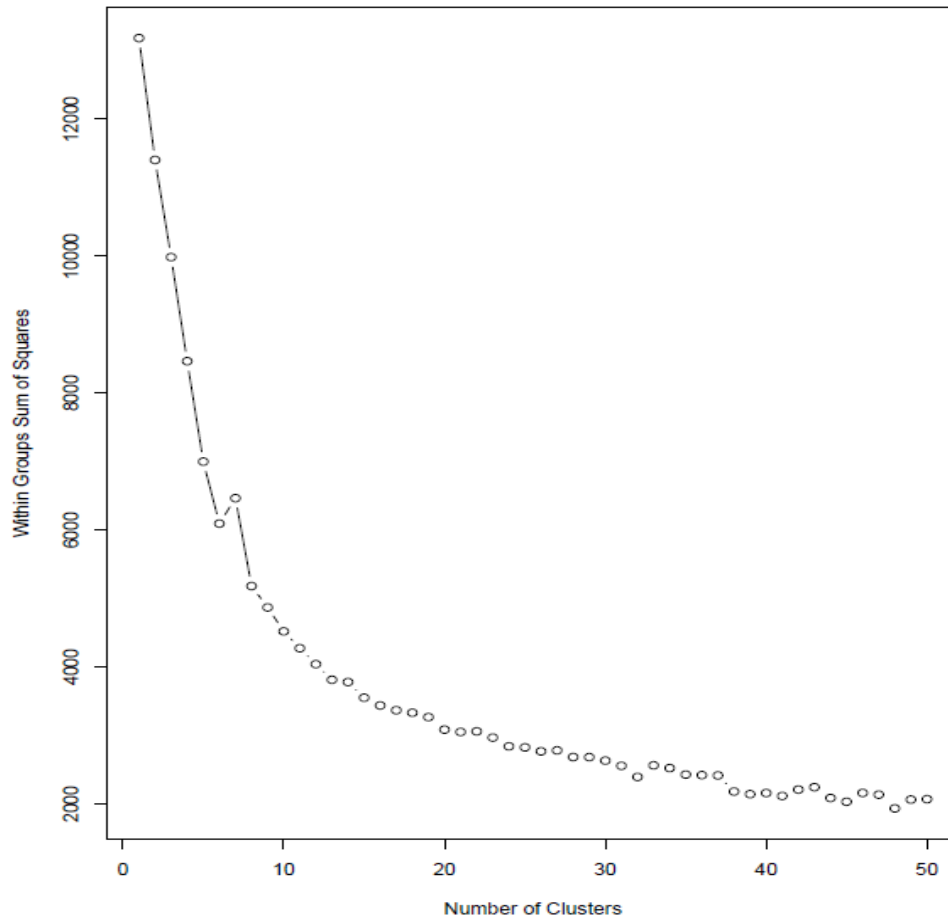


Figure C-3. The Elbow Plot.

The Silhouette Scores for the 10 clusters suggested some difficulty in organising the hydrometric stations based on watershed characteristics (Figure C-4). The average Silhouette Score is 0.2, suggesting that the hydrometric stations are poorly assigned to their hydrological regions. A low Silhouette Score is expected however, as it reflects the physical variability across the study area.

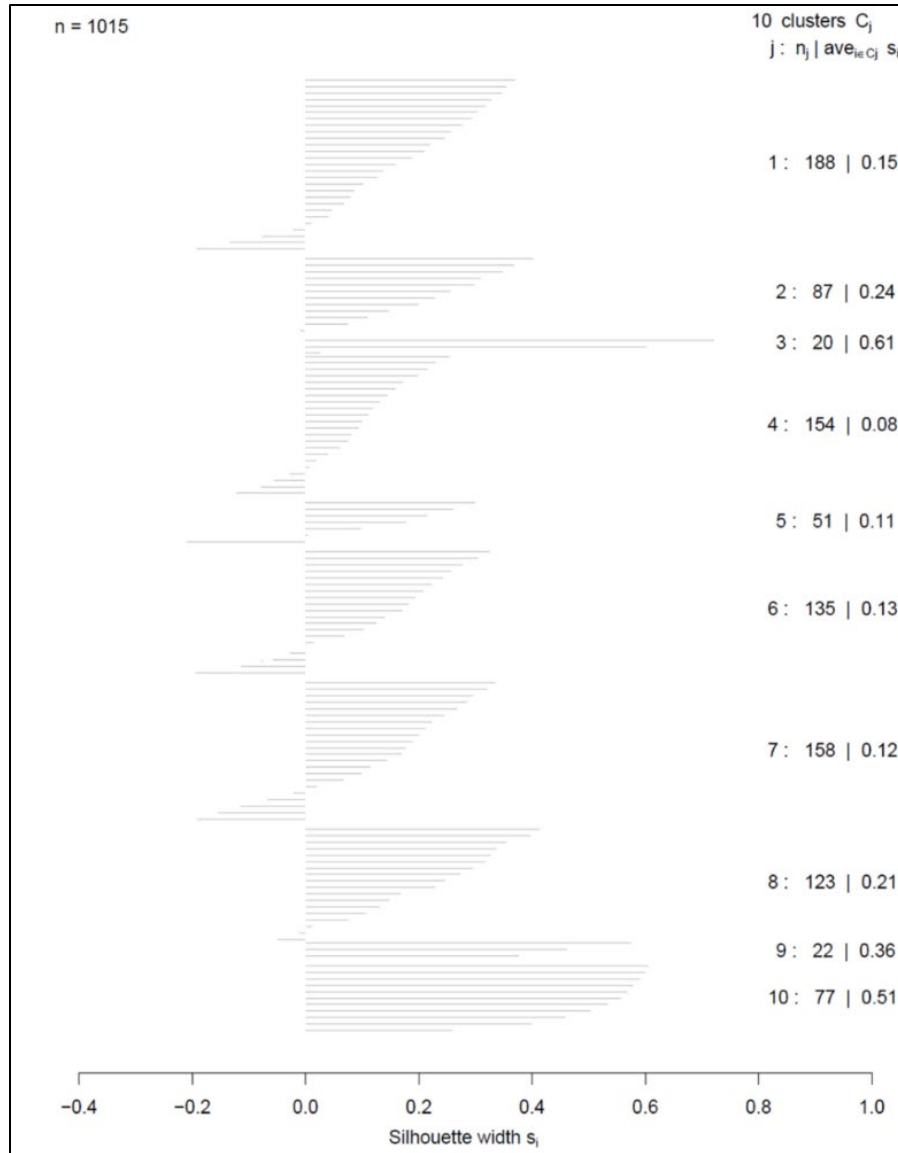


Figure C-4. Silhouette score.

The organization of the hydrometric stations into clusters is compiled in a dendrogram (Figure C-5). The y-axis is the dissimilarity index based on the distance metric. The horizontal axis represents the Ward's Distance (d). The green boxes separate the clusters. The 10 clusters are shown along the bottom of the dendrogram. Because we do not know how many clusters there should be in the landscape, the merging process was stopped once the clusters were more dissimilar than a threshold of approximately 90. The threshold was selected to generate a number of clusters consistent with the Elbow Plot.

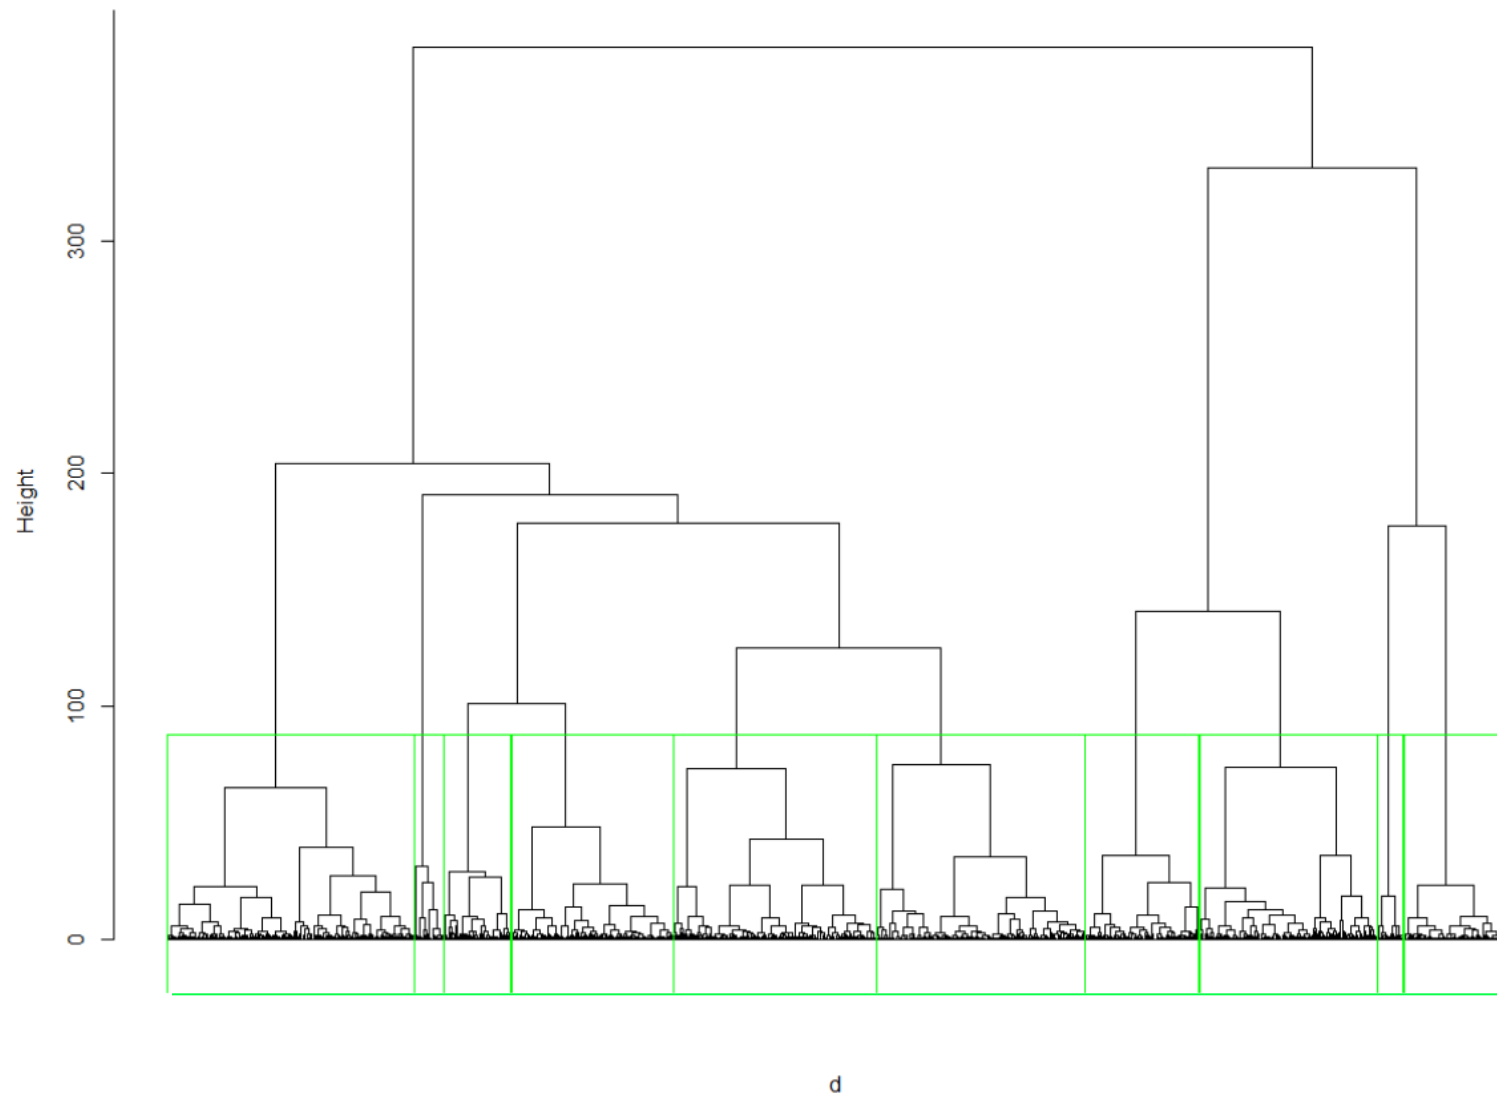


Figure C-5. Dendrogram.

C.5.2.1. Physical Basis of Regions and Flood Characteristics

The spatial distribution of the clusters is considered physically plausible, considering the range in the climate watershed characteristics. Significant regional variations are expected due to the influence of the mountain ranges across the study area (e.g., Coast Mountains, Monashees, the Columbia Trench, and the Rocky Mountains). These orographic effects are expected to control, at least in part, the distribution clusters (Figure C-6).

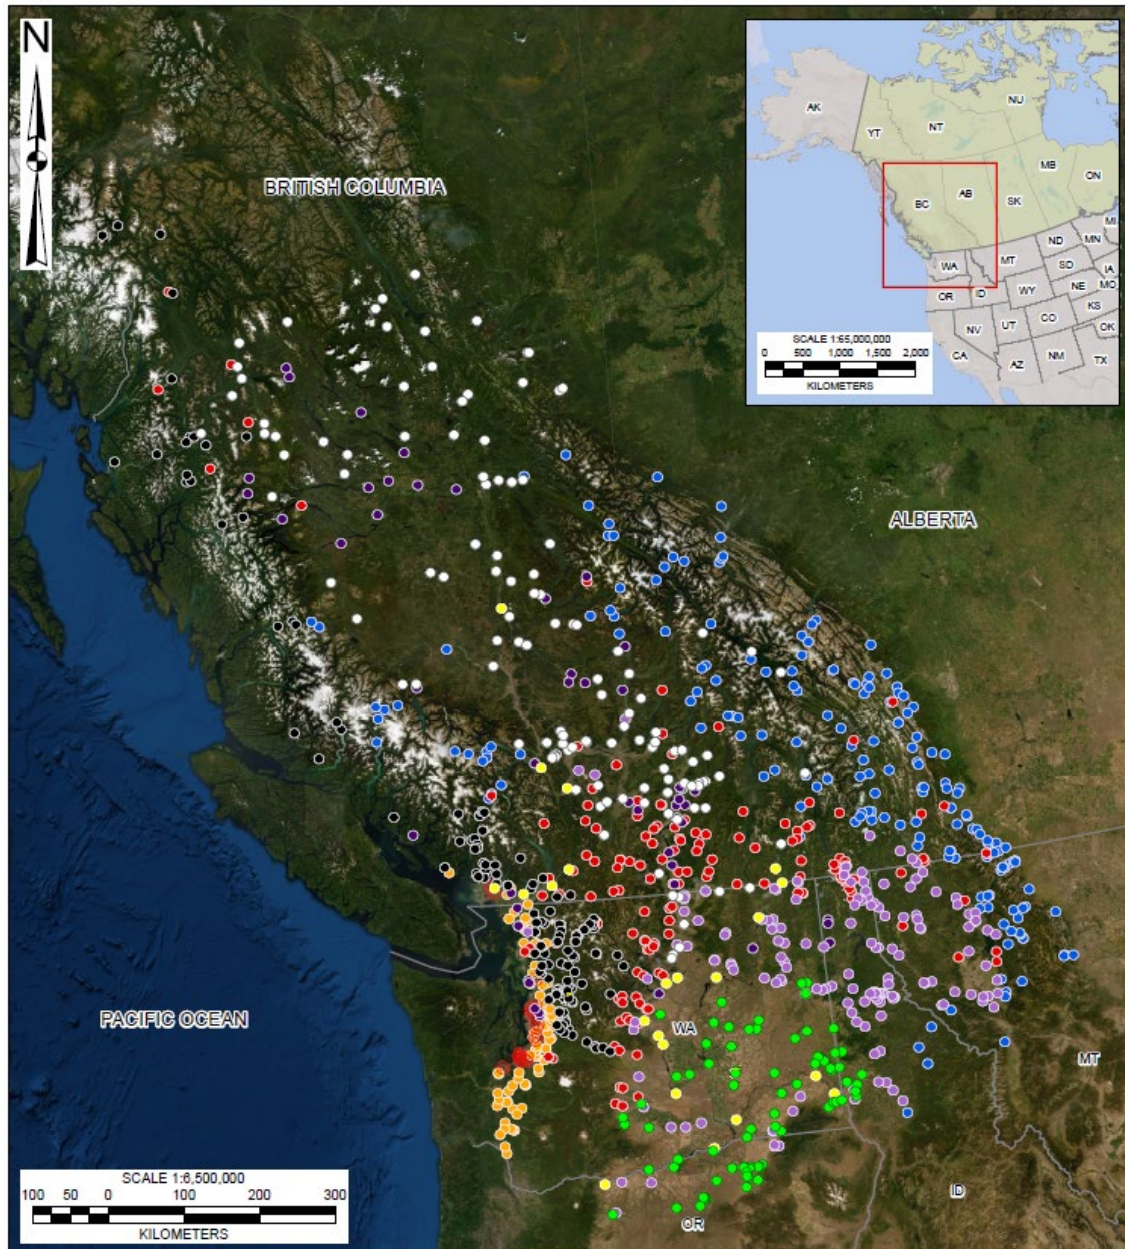


Figure C-6. Spatial distribution of 10 clusters.

The clusters that cover the RDCK region include 1 (blue), 4 (red), and 7 (lilac) with 188, 154, and 158 hydrometric stations, respectively. Cluster 1 is defined by the influence of the Rocky Mountains to the east forming the physiographic boundary with Alberta. Most flood events in this cluster are caused by snowmelt or rain-on-snow events in the spring. The eastern range of the Coastal mountains to the west also includes a small group of hydrometric station assigned to Cluster 1. Cluster 4 is defined generally by a climate characteristic of the semi-arid plateau between major mountain ranges. Most flood events are snowmelt dominated in the spring. In this drier climate, evaporation from water surfaces and from the land as well as transpiration from vegetation make up a large component of the regional water balance. Additional hydrometric stations assigned to Cluster 4 are in the montane cordillera to the east where flood events are often associated with rain-on-snow events during the spring freshet. Cluster 7 is defined by the southern edge of the Rocky Mountains in northwestern Montana. Significant floods in this region are caused by runoff from rain associated with moist air masses from the Gulf of Mexico, although most annual peak discharge events are from snowmelt or rain-on-snow events in the spring.

C.5.2.2. Manual Adjustments

The clusters were further separated manually due to the large number of hydrometric stations in each cluster. Cluster 1 was separated into the eastern and western ranges of the Rocky Mountains. The small group of hydrometric stations located along the eastern range of the Coastal Mountains were also separated from Cluster 1. Cluster 4 was separated into the eastern portion in the montane cordillera and the western portion in the semi-arid plateau. Cluster 7 was not separated due to the limited geographic spread of the hydrometric stations. Based on these manual adjustments, Cluster 1 West, 4 East, and 7 cover the RDCK region (Figure C-7).

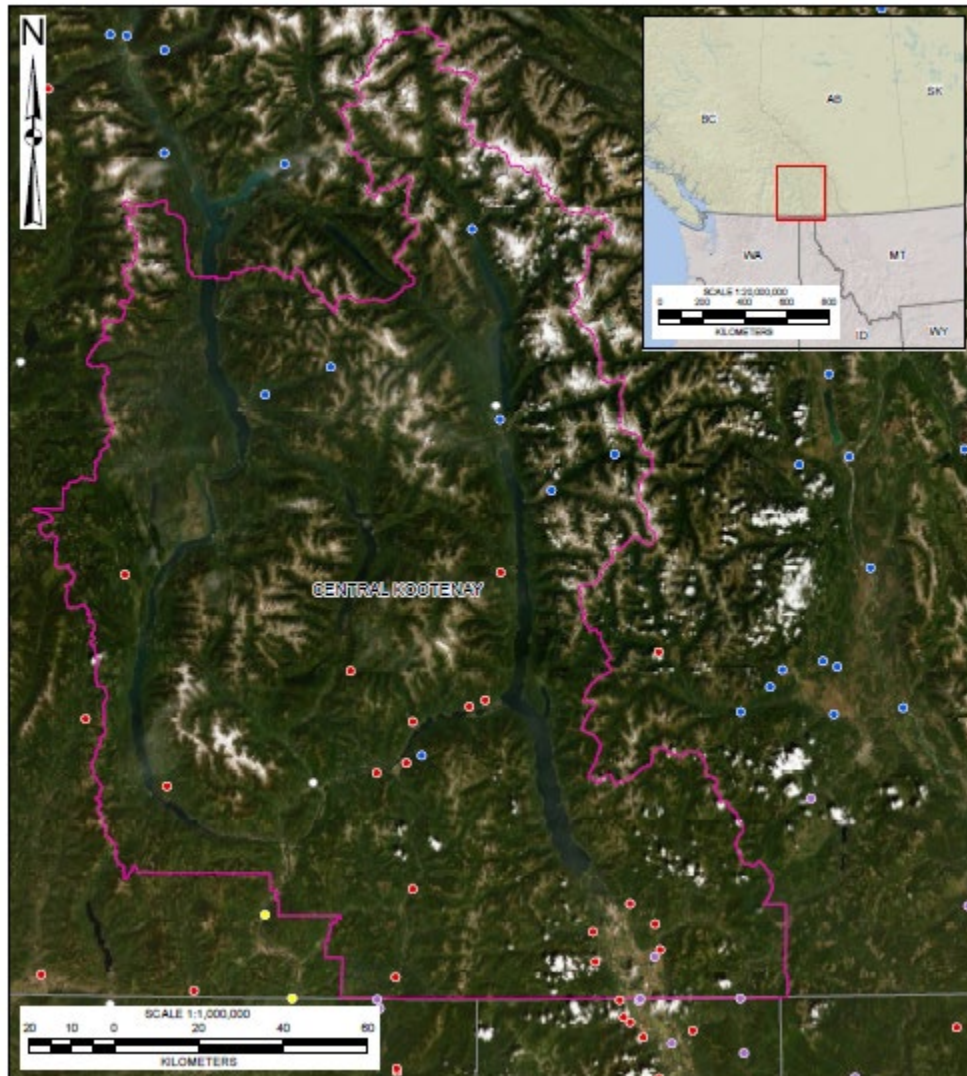


Figure C-7. Clusters that cover the RDCK region.

The clusters were further separated based on the scale of watershed area. The coefficient of variation (CV) is required to be constant for a given homogeneous region. A relationship between the watershed area and L-CV is observed in the clusters that cover the RDCK. However, the strength of the relationship varies considerably (Table C-11). In a flood regionalization study in British Columbia, Wang (2000) observed that in L-moment space, the L-CV varied with watershed area for the defined clusters making them heterogeneous. Wang (2000) demonstrated that the small watersheds show an increase and the large watersheds show a decrease in the L-CV.

Table C-11. R² for regression between watershed area and L-CV

Cluster	Number of Hydrometric Stations	R2 for regression between watershed area and L-CV
1 West	88	0.01
4 East	45	0.12
7	158	0.15

To account for the lack of constancy in the L-CV reported by Wang (2000) and observed in the clusters, the range in the watershed area considered in the study was modified to include two groups: 1) less than 500 km² and 2) more than 500 km² up to 5,000 km². The clusters that cover the RDCK region thus include the following which will be the focus of the results herein.

- Cluster 1 West < 500 km²
- Cluster 1 West > 500 km²
- Cluster 4 West < 500 km²
- Cluster 4 West > 500 km²
- Cluster 7 < 500 km²
- Cluster 7 > 500 km².

C.5.2.3. Refinement of the Hydrometric Station Selection

The final number of hydrometric stations, including the range of discordancy (*Di*) values, for each hydrologic region is presented in Table C-12. The number of hydrometric stations removed is based on the criteria presented in Section C.4.2.4.

Table C-12. Final number of hydrometric stations and range in discordancy measure for each hydrologic region.

Cluster	Watershed Area Range	Initial Number of Hydrometric Stations	Number of Hydrometric Stations Removed	Final Number of Hydrometric Stations	Di (Min)	Di (Max)	Di (Mean)
1 West	< 500 km ²	36	10	26	0.13	3.0	1
	> 500 km ²	52	28	24	0.09	3.0	1
4 East	< 500 km ²	43	9	34	0.04	2.8	1
	> 500 km ²	2	Not enough data for regionalisation				
7	< 500 km ²	75	35	40	0.09	2.6	1
	> 500 km ²	83	65	18	0.11	2.9	1

C.5.2.4. Homogeneity

The H-Test results are summarized in Table C-13. A cluster is declared heterogeneous if H is sufficiently “large”. Hosking and Wallis (1997) recommend a cluster be considered “definitely

heterogeneous” if $H \geq 2$. Increasing the threshold implies that more heterogeneous regions are included in the analysis. Guse, Thielen, Castellarin, & Merz (2010) assessed the effect of the H-Test threshold on the performance of probabilistic regional envelope curves in Germany. Increasing the H-Test threshold from 2 to 4 resulted in a larger number of regions considered for analysis. This increase is important as it can include hydrometric stations that would have been excluded otherwise.

The reality is that while removing hydrometric stations may improve the homogeneity of a region, there may be some important reasons why the H-Test score is high. For example, the site may include a hydrometric station where a very large flood occurred. A representative heterogeneous region is better than a region that has been forced to be homogeneous (Robson and Reed 1999).

The physical variability of British Columbia was recognized by Wang (2000) where the average value for the H-Test was 6.85 based on 19 clusters. The physiographic regions in BC may be less distinct than other regions. As a result, the threshold for the H-Test was relaxed to what is practical for British Columbia.

Table C-13. Number of hydrometric stations, Discordancy values, and H-Test results.

Hydrologic Region	Watershed Area Range	Number of Hydrometric Stations	H-Test
1 West	< 500 km ²	26	6.8
	> 500 km ²	24	9.0
4 East	< 500 km ²	34	13.1
	> 500 km ²	2	Not enough data
7	< 500 km ²	40	4.5
	> 500 km ²	18	7.7

C.5.3. Regionalization

C.5.3.1. Regional Probability Distributions

The regionally averaged L-moments are presented in Table C-14 for hydrologic region 1 West, 4 East, and 7. For the index-flood procedure, l_1 is set to 1.

Table C-14. Regionally averaged L-moments.

Hydrologic Region	Watershed Area Range	Number of Hydrometric Stations	t_1	t_2	t_3	t_4
1 West	< 500 km ²	26	1	0.1796	0.2519	0.1879
	> 500 km ²	24	1	0.1756	0.2411	0.2012
4 East	< 500 km ²	34	1	0.2364	0.2245	0.1624
7	< 500 km ²	40	1	0.3014	0.2539	0.1904
	> 500 km ²	18	1	0.2601	0.2138	0.1924

The Z-statistics for a range of candidate probability distributions is presented in Table C-15. The candidate probability distributions include GLO, GEV, GPA, GNO, and PE3. Probability distributions with Z statistics ≤ 1.64 are deemed acceptable (Hosking & Wallis 1997). All candidate distributions are deemed acceptable for the hydrologic regions that cover the RDCK based on the Z-statistic.

Table C-15. Goodness of fit Z statistic for probability distribution selection.

Hydrological Region	Watershed Area Range	GLO	GEV	GNO	PE3	GPA
1 West	< 500 km ²	1.30	-0.34	-1.14	-2.57	-4.47
	> 500 km ²	0.53	-1.59	-2.50	-4.16	-6.85
4 East	< 500 km ²	3.30	0.69	-0.21	-1.92	-5.60
7	< 500 km ²	1.41	-0.59	-1.59	-3.38	-5.66
	> 500 km ²	0.62	-1.79	-2.55	-4.01	-7.54

To help make the decision on the most representative probability distribution, L-moment diagrams were plotted for each hydrologic region. The t_3 and t_4 position of the regional average relative to the relationships for five three-parameter (GLO, GEV, GPA, GNP, PE3) and five two-parameter (E, G, L, N, and U) candidate probability distributions are depicted in Figure C-8. The three-parameter probability distributions are depicted by the coloured lines while the two-parameter distributions are depicted by the black squares. The L-skewness and L-kurtosis ratio for each hydrologic region is depicted by the cross symbol on Figure C-8. The GEV probability distribution gives an acceptably close fit to the regional L-moments for the different hydrologic regions. As a result, the GEV probability distribution was deemed representative for all hydrologic regions.

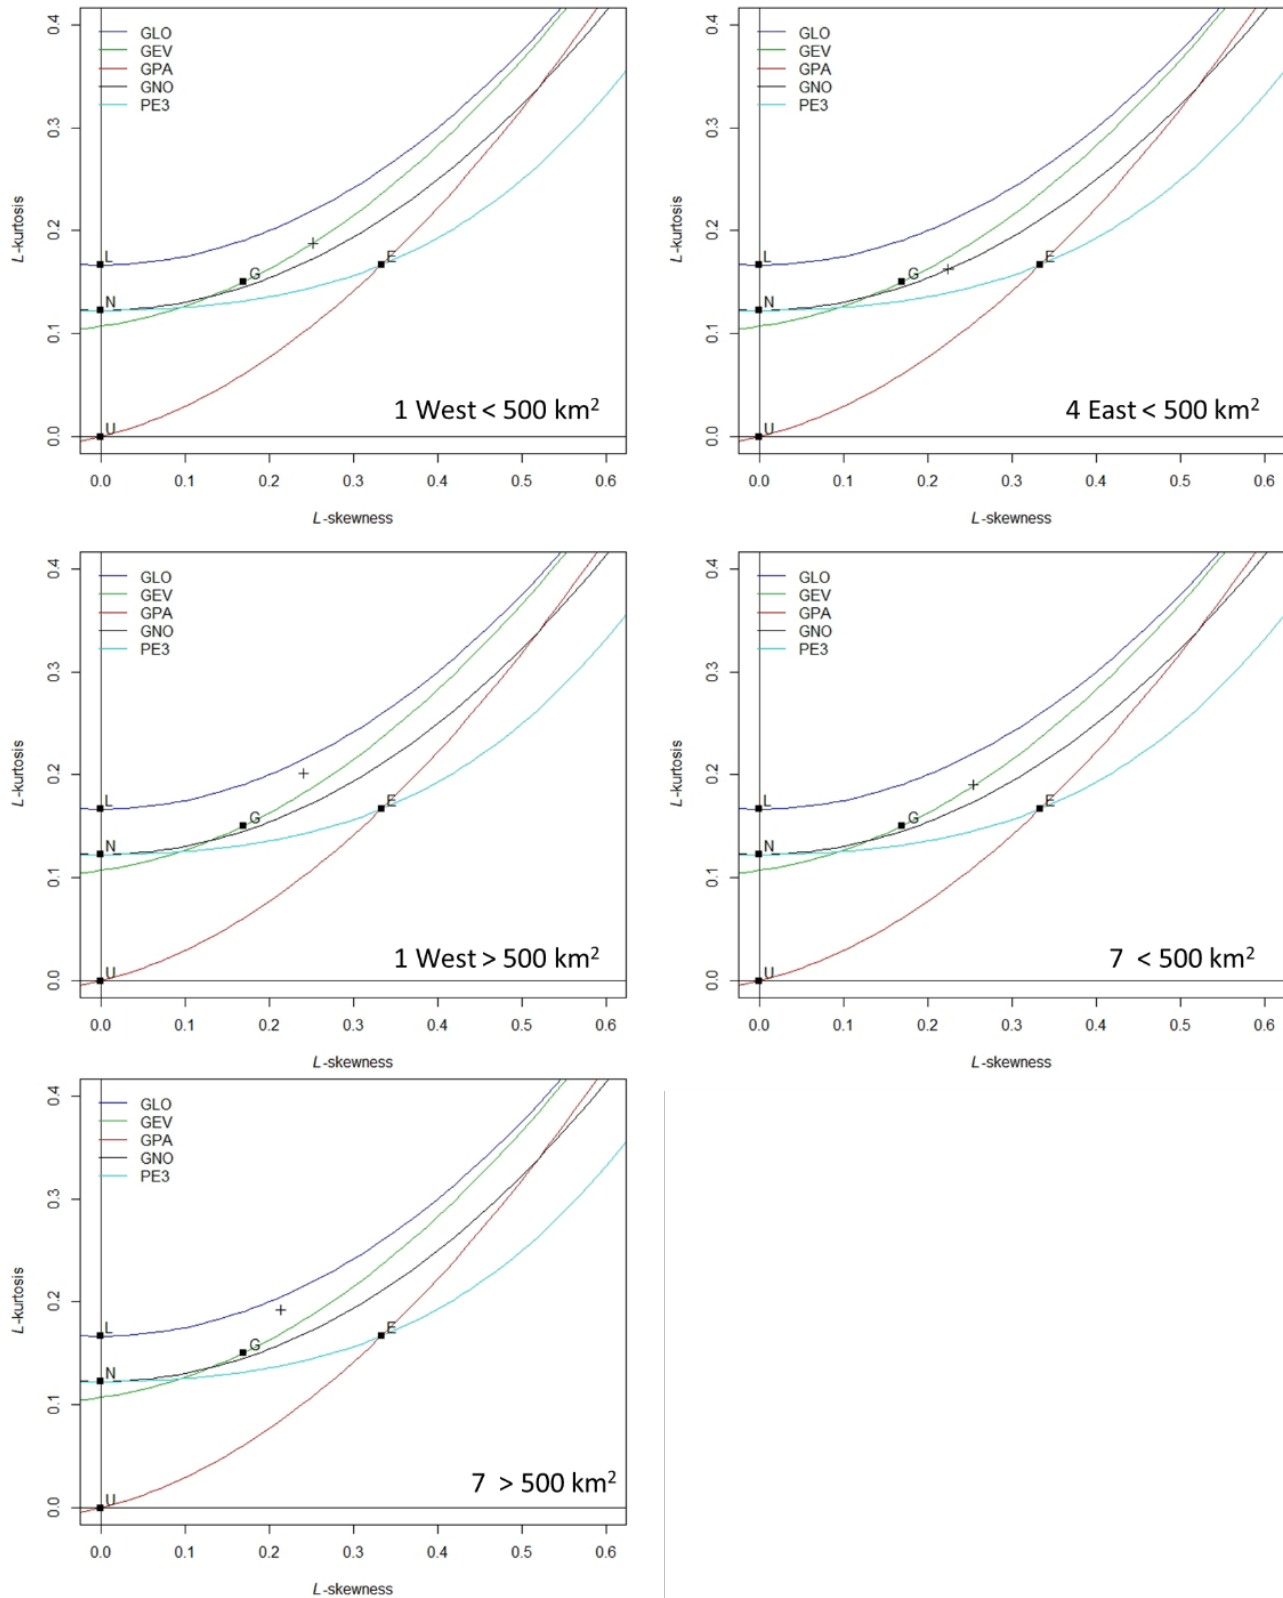


Figure C-8. L-moment ratio diagram for each hydrologic region.

C.5.3.2. Parameter Estimation

The regionally weighted L-moments are used to estimate the parameters of the GEV probability distribution. The parameters for each hydrologic region are presented in Table C-16.

Table C-16. Parameter estimates for the GEV distribution.

Hydrological Region	Watershed Area limit	ξ	α	κ
1 West	< 500 km ²	0.8369	0.2280	-0.1236
	> 500 km ²	0.8421	0.2269	-0.1078
4 East	< 500 km ²	0.7908	0.3139	-0.0832
7	< 500 km ²	0.7257	0.3814	-0.1266
	> 500 km ²	0.7724	0.3513	-0.0671

C.5.3.3. Growth Curves and Error Bounds

The regional growth curves and error bounds are presented for each region in Figure C-9.

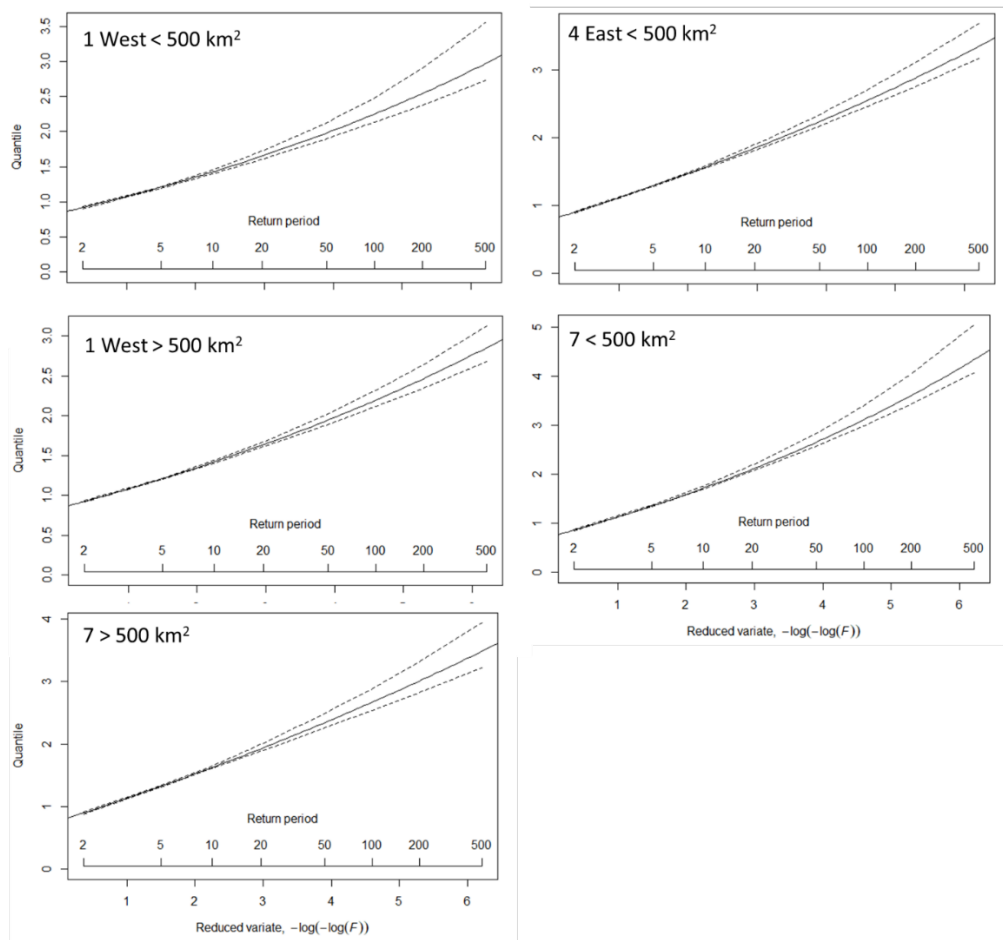


Figure C-9. Growth curves for each hydrologic region.

C.5.3.4. Index Flood

The regional equations for the index-flood for each hydrologic region are presented in Table C-17. The provincial equations are also included at the end of Table C-17. The results are reported to 5 significant figures. However, a total of 5 equations are developed for each hydrologic region and across the province with the intention to average the index-flood estimates. Consequently, the results should be rounded to the nearest unit for flood magnitudes greater than 10 m³/s. The adjusted R² is included for comparison of the models. Models with more watershed characteristics tend to have a lower adjusted R² as these models are penalized for increased number of independent variables.

Table C-17. Regional and provincial equations for the index-flood including the adjusted R².

Hydrologic Region	Watershed Area Range	Index-flood Equations	Adj. R ²
1 West < 500 km²	42 to 454 km ²	1 $\log Q_m = 10.169 + 1.8553(\log Area) - 0.012434(Slope) + 0.098984 (Cen_Long) + 0.0055555(PPT_{fl}) + 0.34911(Water_Wetland)$	0.91
		2 $\log Q_m = 12.127 + 1.9358(\log Area) - 0.013271(Slope) + 0.11264 (Cen_Long) - 0.00022260(Cen_Elev) + 0.0053230(PPT_{fl}) + 0.40695(Water_Wetland)$	0.92
		3 $\log Q_m = 6.951 + 1.8564(\log Area) - 0.011048(Slope) + 0.071361 (Cen_Long) + 0.0053236(PPT_{fl})$	0.90
		4 $\log Q_m = -0.96349 + 1.7509(\log Area) - 0.0095976(Slope) + 0.0043293(PPT_{fl})$	0.89
		5 $\log Q_m = -3.2303 + 2.1932(\log Area) + 0.0015075(MAP)$	0.88
1 West > 500 km²	586 to 4312 km ²	1 $\log Q_m = -2.5781 + 2.0480(\log Area) + 0.0012740 (MAP)$	0.83
		2 $\log Q_m = -2.3716 + 1.8939(\log Area) + 0.41806(\log Catch_Length) + 0.0012775(MAP)$	0.82
		3 $\log Q_m = 1.3411 + 1.9306(\log Area) + 0.18827(\log Catch_Length) + 0.0011046 (MAP) - 0.04866(CN)$	0.82
		4 $\log Q_m = -0.70946 + 1.6015(\log Area) - 0.0081664(Slope) + 0.0013574 (MAP) + 0.057906 (MAT) - 0.0036032(Forest)$	0.83
		5 $\log Q_m = 0.40059 + 1.6514(\log Area) - 0.0082135(Slope) + 0.0010135 (MAP) + 0.15045 (MAT) - 0.016425(Forest) - 0.19361(Water_Wetland)$	0.88

Hydrologic Region	Watershed Area Range	Index-flood Equations		Adj. R ²
4 East < 500 km ²	6 to 441 km ²	1	$\log Q_m = -3.5763 + 2.7620(\log Area) - 0.15167(MAT) + 0.0035040(PPT_{wt}) - 0.26513(Water_Wetland)$	0.96
		2	$\log Q_m = -4.1636 + 2.7871(\log Area) + 0.0037150(PPT_{wt}) - 0.30562(Water_Wetland)$	0.96
		3	$\log Q_m = -1.8437 + 2.6974(\log Area) + 0.0038(PPT_{wt}) - 0.18063(MAT) + 0.0030438(PPT_{wt}) - 0.28288(Water_{Wetland}) - 0.020392(CN)$	0.96
		4	$\log Q_m = -4.0189 + 2.7063(\log Area) + 0.0047397(PPT_{fl}) - 0.3056(Water_Wetland)$	0.95
		5	$\log Q_m = -1.3176 + 2.6880(\log Area) - 0.00069570(MAP) - 0.19022(MAT) + 0.0044279(PPT_{wt})$	0.96
7 < 500 km ²	8 to 471 km ²	1	$\log Q_m = -3.8856 + 1.8844(\log Area) + 0.010435(PPT_{fl})$	0.74
		2	$\log Q_m = -3.9002 + 1.9484(\log Area) + 0.10058(PPT_{fl}) - 0.17007(Water_Wetland)$	0.74
		3	$\log Q_m = -4.4499 + 2.0486(\log Area) + 0.0051660(PPT_{wt}) + 0.0062765(PPT_{sm}) - 0.21014(Water_Wetland)$	0.74
		4	$\log Q_m = -20.730 + 1.7210(\log Area) + 0.36720(Cen_Lat) - 0.00093400(Cen_{Elev}) + 0.13920(PPT_{sp}) - 0.30900(Water_Wetland)$	0.75
		5	$\log Q_m = -1.9967 + 2.9199(\log Area) - 0.44581(\log Catch\ Length) + 0.22219(Cen_Lat) + 0.11838(Cen_Long) + 0.007305(PPT_{wt}) - 0.32687(Water_Wetland)$	0.75

Hydrologic Region	Watershed Area Range	Index-flood Equations		Adj. R ²
7 >500 km²	529 to 4138 km ²	1	$\log Q_m = -2.8251 + 2.0765(\log Area) - 0.65058(MAT) - 0.01087(PAS) + 0.15245(PPT_{wt}) + 0.014215(PPT_{sm}) + 0.14232(Forest)$	0.93
		2	$\log Q_m = 0.51542 + 1.4852(\log Area) - 0.024121(Slope) - 0.0078710(MAP) - 0.69867(MAT) - 0.010055(PAS)$	0.93
		3	$\log Q_m = -0.28887 + 2.1311(\log Area) - 0.00048080(Cen_{Elev}) - 0.59076(MAT) - 0.10256(PAS) + 0.14034(PPT_{wt}) + 0.14291(PPT_{sm}) + 0.018084(Forest)$	0.94
		4	$\log Q_m = -12.290 + 4.2860(\log Area) - 4.4640(\log Catch_Length) + 0.54240(Cen_Lat) + 0.19690(Cen_Long) - 0.0066490(PAS) + 0.013790(PPT_{wt}) + 0.38640(Forest)$	0.94
		5	$\log Q_m = -6.0632 + 2.1265(\log Area) + 0.0053923(PPT_{wt}) + 0.030556(Forest)$	0.90
Provincial Model	1 to 4,888 km ²	1	$\log Q_m = -10.280 + 2.0840(\log Area) - 0.052950(Cen_Long) + 0.00078170(PAS) + 0.0045490(PPT_{sp}) - 0.077680(Water_Wetland) + 0.015770(CN)$	0.88
		2	$\log Q_m = -10.990 + 2.0900(\log Area) - 0.054870(Cen_Long) + 0.00079820(PAS) + 0.0045680(PPT_{sp}) + 0.0022550(Forest) - 0.079050(Water_Wetland) + 0.020340(CN)$	0.88
		3	$\log Q_m = -9.7160 + 2.0890(\log Area) - 0.044870(Cen_Long) - 0.00015400(Cen_Elev) + 0.00095000(PAS) + 0.0043910(PPT_{sp}) + 0.0027010(Forest) - 0.081050(Water_Wetland) + 0.021030(CN)$	0.89
		4	$\log Q_m = -8.3390 + 2.0610(\log Area) - 0.047040(Cen_Long) + 0.00070070(PAS) + 0.0043090(PPT_{sp}) + 0.0027010(Forest)$	0.88
		5	$\log Q_m = -2.7860 + 2.0520(\log Area) - 0.0023640(PPT_{wt}) + 0.0028430(PPT_{sm}) - 0.063700(Water_Wetland)$	0.88

C.5.4. Error Statistics

The weighted standardized error statistics for the regional and provincial model over a range of flood quantiles for the different hydrologic regions are presented in Table C-18. The error statistics are not consistent across all hydrologic regions. The regional model may be selected for the 4 East < 500 km² hydrologic region. In the case of the 1 West region, either the regional or provincial model would be considered adequate. Lastly, the regional model is probably the model of choice for the 7 hydrologic region. As expected, the error statistics for the lower flood quantiles are lower than those for higher flood quantiles reflecting the increased uncertainty in higher quantile estimates.

Table C-18. Weighted standardized error statistics for the regional and provincial models over a range of flood quantiles. Green highlighted cells depict a positive bias while the red highlighted cells depict a negative bias.

Error Stats	AEP	1 West < 500 km ²		1 West > 500 km ²		4 East < 500 km ²		7 < 500 km ²		7 > 500 km ²	
		Regional Qm	Provincial Qm	Regional Qm	Provincial Qm	Regional Qm	Provincial Qm	Regional Qm	Provincial Qm	Regional Qm	Provincial Qm
SRMSE	0.5	0.24	0.31	0.27	0.26	0.39	0.92	2.71	3.80	0.19	0.99
	0.1	0.28	0.31	0.26	0.28	0.33	0.69	3.08	4.10	0.21	0.96
	0.02	0.40	0.41	0.31	0.33	0.38	0.64	3.70	4.80	0.27	1.01
	0.005	0.54	0.53	0.38	0.39	0.45	0.66	4.37	5.59	0.36	1.09
SPercent Error	0.5	18	21	20	21	27	59	70	122	15	65
	0.1	22	24	20	24	22	45	74	128	14	65
	0.02	31	32	25	29	27	39	84	144	20	68
	0.005	42	40	30	33	34	38	97	165	29	74
SBIAS	0.5	0.03	-0.08	0.04	-0.09	0.07	0.30	0.39	1.03	0.03	0.39
	0.1	0.06	-0.06	0.04	-0.07	0.07	0.23	0.44	1.08	0.03	0.39
	0.02	0.09	-0.03	0.06	-0.06	0.08	0.20	0.52	1.21	0.04	0.42
	0.005	0.13	0.02	0.08	-0.03	0.10	0.20	0.62	1.37	0.06	0.45

C.6. APPLICATION TO UNGAUGED WATERSHEDS

The goal of the regionalization of floods is to estimate quantiles for ungauged watersheds in the RDCK. A total of 12 watersheds are modeled for clearwater floods. To begin, a watershed polygon was defined for each ungauged watershed, as shown in Figure C-10. The suite of 18 watershed characteristics were then extracted and averaged over the area for each ungauged watershed. The resulting watershed characteristics are presented in Table C-19.

The ungauged watersheds were subsequently assigned to one of the hydrologic regions identified across the study area. The hydrologic region assignment was completed using the Random Forest classification algorithm. Once a hydrologic region was assigned to the ungauged watershed; the index-flood was estimated based on the appropriate model (regional and / or provincial). The flood quantiles were then estimated for a range of AEPs using the index-flood estimate and the appropriate regional growth curve. The hydrologic region assignment, index-flood estimate, and flood quantiles for each ungauged watershed are presented in Table C-20.

The magnitude of the flood quantiles is influenced by the watershed characteristics. This is because the index-flood is calculated using a multiple linear regression that depends on the watershed characteristics that define the best 5 models for a given region. Two watersheds of similar area may have significantly different flood quantile estimates because of major differences in watershed characteristics. For example, Lost Creek and Porcupine Creek share comparable watershed areas of 62 km² and 68 km², respectively. However, flood quantiles for Porcupine Creek are 35% greater than Lost Creek, with the difference in magnitude attributed to difference in climate characteristics.

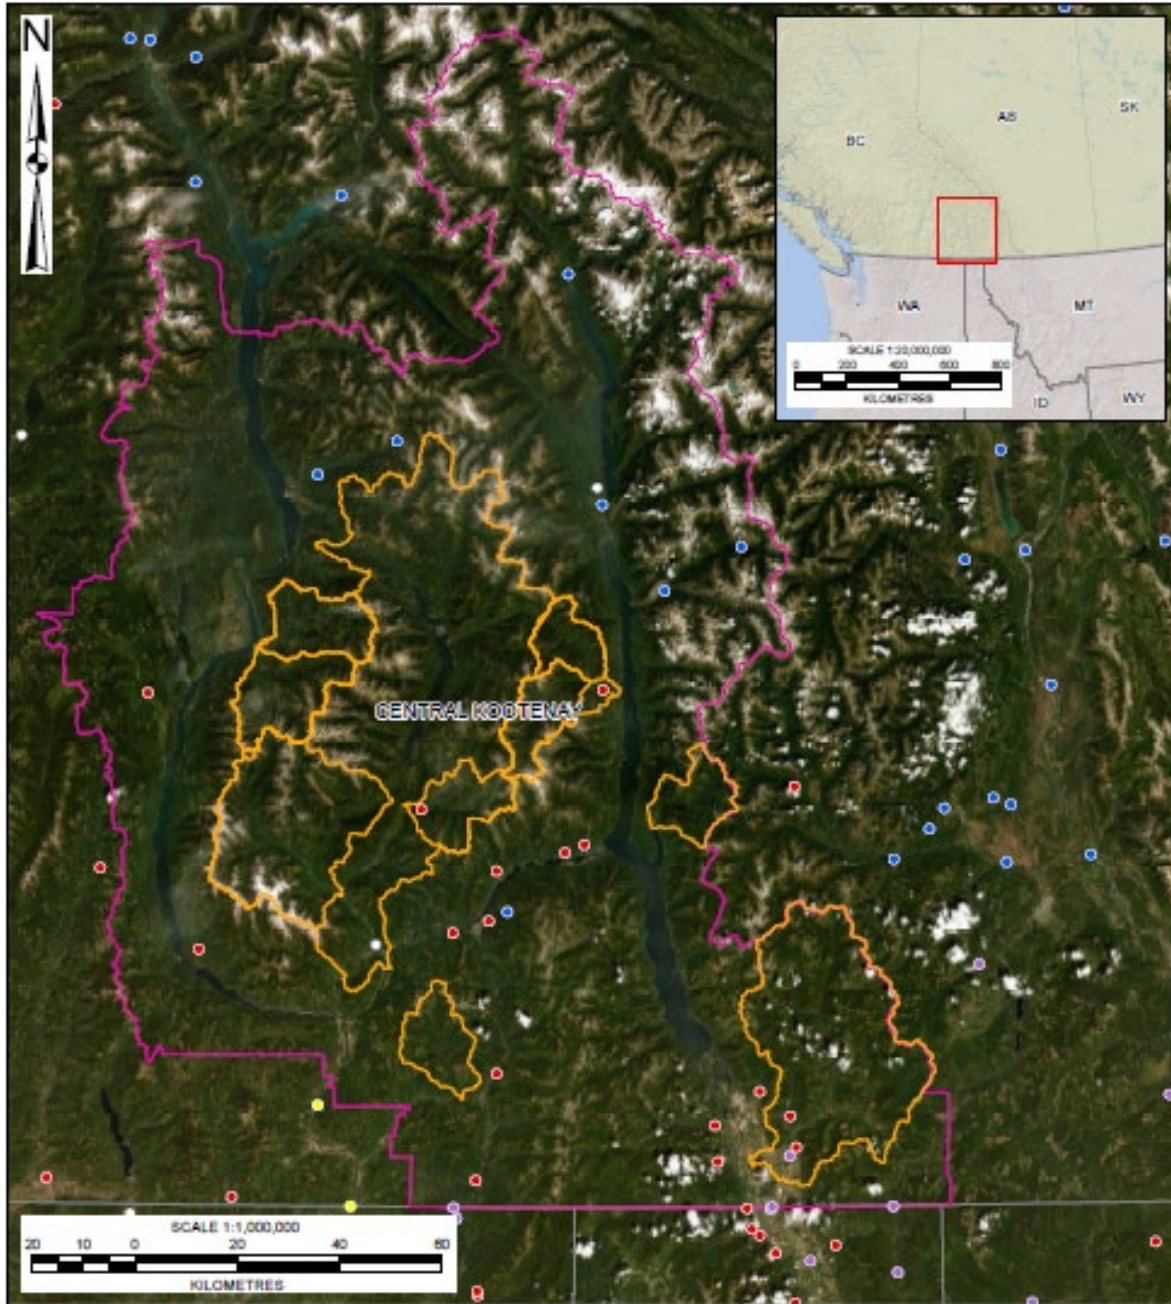


Figure C-10. Watershed polygons for the ungauged watersheds.

Table C-19. Watershed characteristics for the clearwater sites located in the RDCK region.

Watershed Name	Area (km ²)	Relief (m)	Watershed Length (km)	Slope (%)	Centroid Latitude (degrees)	Centroid Longitude (degrees)	Centroid Elevation (m)	MAP (mm)	MAT (°C)	PAS (mm)	PPT_wt (mm)	PPT_sp (mm)	PPT_sm (mm)	PPT_fl (mm)	Forest (%)	Water and Wetland (%)	Urban (%)	CN
Crawford Creek	186	2092	2.53	83	49.693818	-116.700089	1181	1116	3.0	590	383	233	198	302	88	0.0	0.2	70
Keen Creek	202	2066	2.37	87	49.861962	-117.119617	1584	1390	1.3	857	460	307	240	384	66	0.2	7.7	67
Upper Kaslo Creek	150	1927	2.35	82	49.990505	-117.046683	1182	1244	2.7	668	416	265	223	340	90	0.0	0.8	70
Kalso Creek at Kootenay Lake	386	2228	3.09	72	49.914818	-117.077853	1280	1312	2.1	756	438	284	230	360	78	0.2	4.3	68
Lemon Creek	206	2046	2.58	79	49.717145	-117.338618	1956	1322	2.7	754	461	284	206	370	90	0.1	0.7	65
Burton at Arrow Lake	530	2323	4.13	56	49.952644	-117.773748	1300	1242	2.4	704	4280	258	220	336	85	0.3	1.2	64
Caribou Creek	238	2235	2.97	75	50.019565	-117.726695	1213	1260	2.4	709	432	261	226	341	92	0.1	0.3	67
Snow Creek	291	2314	3.05	76	49.897831	-117.811685	1742	1227	2.3	700	425	255	216	331	80	0.3	1.8	63
Little Slokan River	818	2281	5.40	42	49.664986	-117.79715	1612	1161	2.8	643	416	245	188	313	82	0.5	1.7	63
Slokan River	3475	2544	8.13	31	49.85497	-117.525816	1196	1224	3.0	666	431	256	206	332	81	2.9	2.1	66
Goat River	1259	2111	6.01	35	49.28428	-116.347233	1050	857	3.2	433	284	194	163	217	88	0.1	0.2	69
Erie Creek Upstream End	201	1575	2.71	58	49.288665	-117.392234	1010	1265	3.8	617	435	286	210	333	95	0.0	0.0	62

Table C-20. Hydrologic region assignment for the ungauged watersheds.

Watershed Name	Hydrometric Station	Watershed Area (km ²)	Hydrologic Region ¹	Qm (m ³ /s)	Flood Quantiles		
					0.05 AEP (m ³ /s)	0.02 AEP (m ³ /s)	0.005 AEP (m ³ /s)
Crawford Creek	-	186	7	27	50	61	80
Keen Creek	08NH132	202	pro-rated	-	78	94	125
Upper Kaslo Creek	08NH005	150	pro-rated	-	99	120	160
Kaslo Creek at Kootenay Lake	08NH005	386	pro-rated	-	160	200	260
Lemon Creek	08NJ160	206	pro-rated	-	72	84	105
Burton at Arrow Lake	-	530	4	80	150	180	230
Caribou Creek	-	238	4	42	78	94	120
Snow Creek	-	291	4	45	83	100	130
Little Slocan River		818	4	103	190	230	290
Slocan River	08NJ013	3475	pro-rated	-	685	770	880
Goat River	8NH004	1259	7	-	387	430	500
Erie Upstream End	-	201	4	35	65	79	102

Note:

1. A pro-rated calculation is completed when a representative hydrometric station is located upstream or downstream from the ungauged site and has a record length considered long enough for reliable frequency analysis. Flood quantile estimates calculated at the hydrometric station are transferred to the ungauged site by relating the annual maximum peak instantaneous discharge at the hydrometric station to the ungauged site using watershed area size.

C.7. UNCERTAINTY

The process of flood regionalization is inherently uncertain because of the several limitations. The probability distribution of flood events is unknown. While there are statistical tools to help reach a 'best estimate', it is not possible to know what the probability distribution is in practice. As a result, the flood quantile estimates are supported by a mathematical model that is considered reliable based on the available flood data.

The regionalisation of floods tends to underestimate peak flows for small watersheds and overestimate peak flows for larger watersheds. This is in part due to differences in hydrological processes that control peak flows. For example, maximum annual peak instantaneous flows in small watersheds within the study area are more likely controlled by rainfall compared to larger watershed that tend to be more snowmelt-dominated in the spring. The rainfall control in small watersheds reflects the greater likelihood that a rainfall event, like a convective storm, covers the entire watershed area. In the case for larger watersheds, it is more likely for snowmelt to occur across the entire area in the spring.

While hydrometric stations with watershed areas starting from approximately 6 km² up to 5,000 km² are included in the analysis, it is not likely that the equations apply to watersheds if they are either too small or too large. The regional models are only reliable if applied within the range of watershed areas used to build the models in the first place. Extrapolation beyond the limit of the model may yield poor or unreliable results.

The regional models are as reliable as the data that is used to support them. There is inherent measurement error in flood events, especially for larger flood events. Furthermore, the data record may simply be incorrect due to a transcription error. In addition, the measuring device may have been moved to a new location or trends over time may come about from changes in the monitoring device. It is not possible to inspect every record at every hydrometric station to control for these sources of error because so much data are pooled across such a large area.

The same applies to the watershed polygon delineation. Much of the watershed delineation was automated using tools that were developed to speed up this process (RNT and ESRI tools). Manual spot checks were completed in conjunction with quality control of the area by means of comparison with published values. Nevertheless, it was not possible to inspect every watershed polygon to control for delineation errors due to the high number of polygons that were generated for this study. It is expected that these sources of error are negligible next to the quantity of data that is processed across the study area.

Trends in the flood record imposed by climate change, land use change, wildfires, insect infestations, or urban development generally precludes the use of frequency analysis. Trend analyses were completed on the flood record to account for some level of trend. However, the flood record often captures a small window of the flood history at a given location. The limited record makes it difficult to identify a real trend from an artifact of the data record. Therefore, no hydrometric stations were discarded from the analysis due to the presence of a trend in the flood record.

REFERENCES

- Coles, S. (2001). *An Introduction to Statistical Modeling of Extreme Values*. Springer Verlag London Limited. 208 p.
- Dalrymple, T. (1960). *Flood Frequency Analysis*. US Geological Survey. Water Supply Paper, 1543 A.
- Farr, T.G., et al. (2007), The Shuttle Radar Topography Mission. *Reviews of Geophysics*, 45, RG2004, <https://doi.org/10.1029/2005RG000183>.
- Greenwood, J.A., Lanswehr, J.M., Matalas, N.C., & Wallis, J.R. (1979). Probability weighted moments: Definition and relation to parameters of several distributions expressible in reserve form. *Water Resources Research*, 15, 1049-54.
- Guse, B., Thielen, A.H., Castellarin, A., & Merz, B. (2010). Deriving probabilistic regional envelope curves with two pooling methods. *Journal of Hydrology*, 380(1-2), 14-26. <https://doi.org/10.1016/j.jhydrol.2009.10.010>
- Hosking, J.R.M. (1990). L-moments: Analysis and estimation of distributions using linear combinations of order statistics. *Journal of the Royal Statistical Society, Series B*, 52, 105-24.
- Hosking, J.R.M. & Wallis, J.R. (1993). Some statistics useful in regional frequency analysis. *Water Resources Research*, 29, 271-81.
- Hosking, J.R.M. & Wallis, J.R. (1997) *Regional Frequency Analysis: An Approach Based on L-moments*. Cambridge University Press, UK. <http://dx.doi.org/10.1017/cbo9780511529443>
- Ouarda, T.B.M.J., St-Hilaire, A., & Bobée, B. (2008). Synthèse des développements récents en analyse régionale des extrêmes hydrologiques. *Journal of Water Sciences*, 21, 219–232. <https://doi.org/10.7202/018467ar>.
- R Core Team. (2019). R: A language and environment for statistical computing. R Foundation for Statistical Computing, Vienna, Austria. <https://www.R-project.org/>.
- Robson, A.J. & Reed, D.J. (1999). Statistical Procedures for Flood Frequency Estimation. Flood Estimation Handbook, vol. 3. Institute of Hydrology, Wallingford, UK.
- Ross, C.W., Prihodko, L., Anchang, J., Kumar, S., Ji, W., & Hanan, N.P. (2018). HYSOGs250m, global gridded hydrologic soil groups for curve-number-based runoff modeling. ORNL Distributed Active Archive Center. <https://doi.org/10.3334/ORNLDAAAC/1566>.
- rvic, R., Homer, C., Ressler, R., Pouliot, D. Hossain, S.N., Colditz, R.R., Olthof, I., Giri, C., & Victoria, A. (2012). North American Land Change Monitoring System. In C. Giri (Ed) *Remote Sensing of Land and Land Cover: Principles and Applications* (p. 303-324). CRC Press.
- Tasker, G.D. (1980). Hydrologic regression and weighted least squares. *Water Resources Research*, 16(6), 1107–1113.

- Tasker, G.D. (1982). Comparing methods of hydrologic regionalization. *Water Resources Bulletin*, 18(6), 965-970.
- United States Geological Survey (USGS). (1986). *Urban hydrology for small watersheds*. Technical report 55.
- Wang, Y. (2000). Development of methods for regional flood estimates in the province of British Columbia (Doctoral dissertation). Retrieved from University of British Columbia. 200 pp.
- Wang, T., Hamann, A., Spittlehouse, D., & Carroll, C. (2016). Locally Downscaled and Spatially Customizable Climate Data for Historical and Future Periods for North America. *PLoS ONE* 11(6): e0156720. <https://doi.org/10.1371/journal.pone.0156720>
- Ward, J.H., Jr. (1963). Hierarchical Grouping to Optimize an Objective Function. *Journal of the American Statistical Association*, 58, 236–244.
- Zhang, Z., Stadnyk, T.A., & Burn, D.H. (2019). Identification of a preferred statistical distribution for at-site flood frequency analysis in Canada. *Canadian Water Resources Journal*. <https://doi.org/10.1080/07011784.2019.1691942>

APPENDIX D CLIMATE CHANGE CONSIDERATIONS

D.1. INTRODUCTION

The hydroclimate of British Columbia (BC) is complex because of proximity to the Pacific Ocean, mountainous terrain, and extent in latitude. The hydrologic regime is either freshet-dominated (nival regime) or snow-influenced (hybrid nival-pluvial or nival-glacial regimes) throughout most of BC (Eaton & Moore, 2010). Hydrologic trends over recent decades generally include a warming and decreasing snowpack (Kang, Shi, Gao, & Déry, 2014) and earlier onset of spring melt (Déry et al., 2009). The hydrologic response to climate change in BC is expected to be influenced by the regional variability in projected temperature and precipitation changes and by regional variations in physical geography. For example, snow dynamics are strongly influenced by elevation-based temperature gradients resulting in large spatial variations in regions of diverse topography (Schnorbus, Werner, & Bennett, 2014). Also, warmer hybrid nival-pluvial regimes may be more sensitive to changes in regional temperature, precipitation, and rainfall trends (Whitfield, Cannon, & Reynolds, 2002).

Climate change impacts were assessed by BGC for the clearwater watersheds using statistically- and process-based methods. This appendix presents a description of these methodologies and their results. This appendix begins with a description of the anticipated climate change impacts on the hydroclimate within the RDCK (Section D.2). The climate change sensitivity of clearwater watersheds within the region is examined in Section D.3. Finally, an evaluation of the climate change impacts using statistically- and process-based methods for the clearwater watersheds is presented in Section D.4. This appendix ends with a summary of the method that was used to account for the climate change impacts on the hydrology of clearwater watersheds in the RDCK region.

D.2. CLIMATE CHANGE IMPACTS

D.2.1. Hydroclimate

Historical changes to climate have been documented in BC (Barnett et al., 2008). While there is a natural variability component to the changes in climate, such as El Niño Southern Oscillation (ENSO) and the Pacific Decadal Oscillation (PDO), historical trends in western North America have been attributed to climate change in the form of increased regional warming (Barnett et al., 2008).

Climate change is projected to impact the overall mean as well as the extremes for a range of climate variables including temperature, precipitation, snow, and rainfall intensities. Projected change in mean annual precipitation (MAP), temperature (MAT), and precipitation as snow (PAS) from historical conditions (1961 to 1990) for clearwater watersheds across the RDCK region for 2050 (average of years 2041 to 2070) are presented in Table D-1.

The climate-adjusted variables are calculated using projections based on the Representative Carbon Pathway (RCP) 8.5 which are averaged across 15 fifth phase Coupled Model Intercomparison project (CMIP5) models (CanESM2, ACCESS1.0, IPSL-CM5A-MR, MIROC5,

MPI-ESM-LR, CCSM4, HadGEM2-ES, CNRM-CM5, CSIRO Mk 3.6, GFDL-CM3, INM-CM4, MRI-CGCM3, MIROC-ESM, CESM1-CAM5, GISS-E2R) that were chosen to represent all major clusters of similar atmosphere-ocean general circulation models (AOGCMs) (Knutti, Massin, & Gettleman, 2013), and that had high validation statistics in their CMIP3 equivalents.

Table D-1. Projected change (RCP 8.5, 2050) from 1961 to 1990 historical conditions (Wang et al., 2016).

Watershed	Change in MAP (mm)	Change in MAT (°C)	Change in PAS (Snow Water Equivalent, mm)
Crawford Creek	59	3.5	-206
Keen Creek	82	3.6	-239
Upper Kaslo Creek	72	3.6	-231
Kalso Creek at Kootenay Lake	76	3.6	-233
Lemon Creek	82	3.5	-252
Burton at Arrow Lake	73	3.5	-221
Caribou Creek	75	3.5	-225
Snow Creek	72	3.6	-217
Little Slocan River	69	3.5	-215
Slocan River	74	3.5	-220
Goat River	40	3.5	-151
Erie Creek Upstream End	69	3.6	-247

Projected changes in average climate variables across the RDCK by 2050 show that there is likely to be:

- A net increase in MAP ranging from 40 mm to 82 mm
- A net increase in MAT ranging from 3.5 °C to 3.6 °C
- A net decrease in PAS ranging from 151 mm to 252 mm.

In addition, short-term precipitation extremes (sub-daily) are expected to increase in most of North America with a warming atmosphere. The frequency of extremes increases 5-fold in large parts of Canada in December, January, and February (Figure D-1a). The frequency of extremes decreases to approximately a 2-fold increase in southeast BC in June, July, and August (Figure D-1b). This shift in frequency covers the period January 2001 to September 2013. The increase is due to a shift towards moister and warmer climatic conditions (Prein et al., 2017). Extremes in short-term precipitation contributes to the frequency and magnitude of flood events, especially for small watersheds where soil storage is either low or full (i.e., < 250 km²).

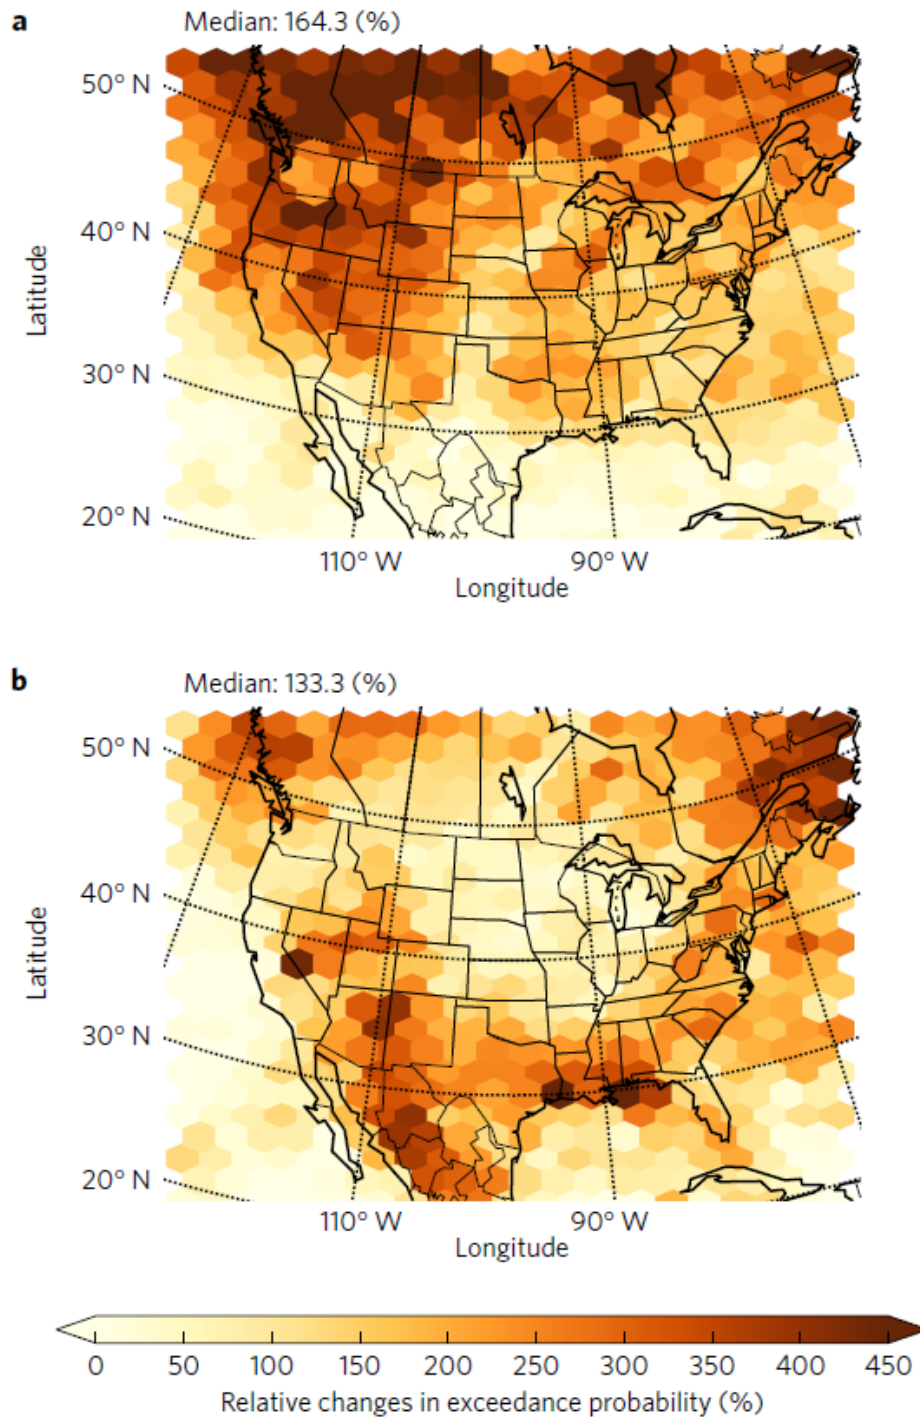


Figure D-1. Change in the exceedance probability of hourly precipitation intensities for (a) December, January, and February, and (b) June, July, and August (Prein et al, 2017).

D.2.2. Peak Discharges

The RDCK is situated within the Montane Cordillera ecozone which covers most of southern BC. Extreme flood events in this area are often associated with rain-on-snow events in the spring (Harder et al., 2015). A hydrograph example where the regime is freshet-dominated is shown in Figure D-2. Although the effects of climate change on precipitation are not clear, projected increases in temperature are expected to have the largest impact on annual minimum temperatures occurring in the winter months (Harder et al., 2015).

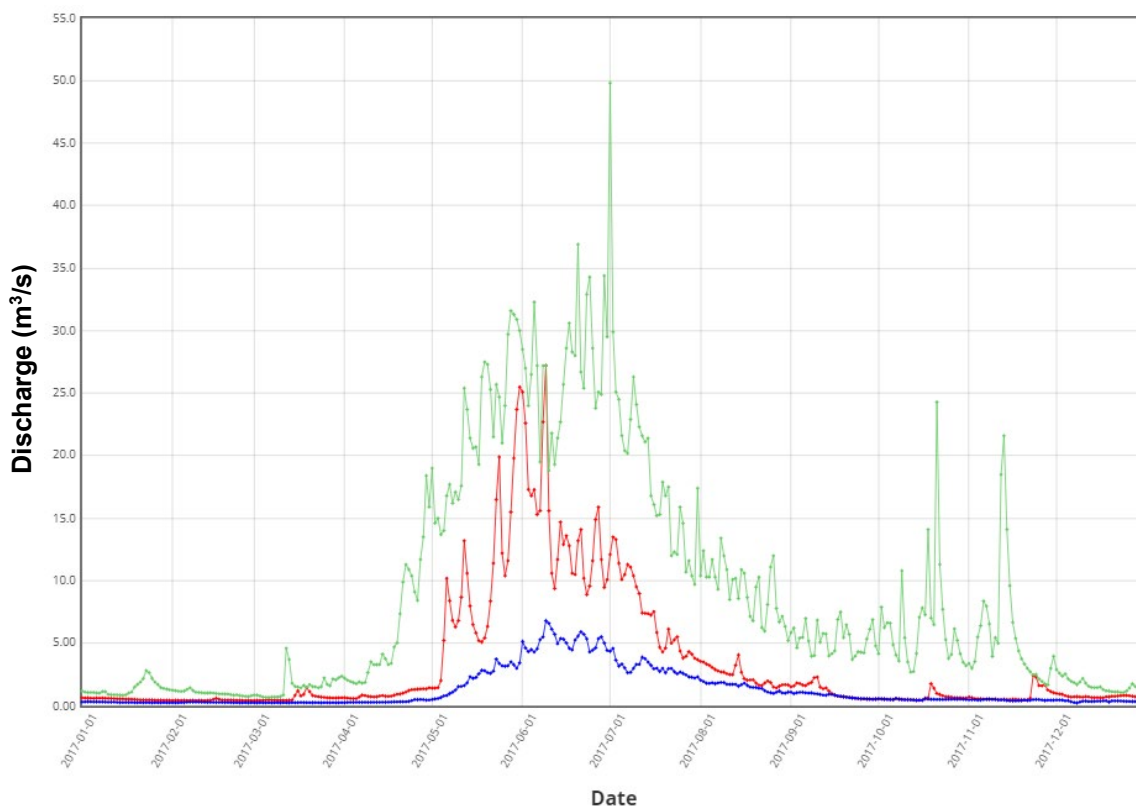


Figure D-2. Example freshet-driven hydrologic regime for Keen Creek below Kyawats Creek (08NH132). Green line is the maximum discharge, the blue line is the minimum discharge, and the red line is the 2017 discharge.

The effects of temperature change differ throughout the region. High elevation regions throughout parts of the Montane Cordillera (e.g., Upper Columbia watershed) are projected to experience increases in snowpack, limiting the response in high elevation watersheds while lower elevations are projected to experience a decrease in snow water equivalent (Loukas & Quick, 1999; Schnorbus et al., 2014).

Projected changes in discharge vary spatially and seasonally based on snow and precipitation changes and topography-based temperature gradients. Researchers anticipate that discharge will increase in the winter and spring in the RDCK due to earlier snowmelt and more frequent rain-on-snow events, while earlier peak flow timing is expected in many rivers (Schnorbus et al., 2014; Farjad, Gupta, & Marceau, 2016).

D.3. WATERSHED SENSITIVITY

The RDCK includes 6 detailed clearwater study areas (Crawford Creek, Kaslo Creek, Slocan River, Burton Creek, Goat River, and Salmo River). Each study area includes one or more clearwater watersheds that were assessed to inform the floodplain delineation. All clearwater watersheds in the RDCK are characterized by a freshet-dominated regime. Freshet-dominant regimes are characterized by a maximum annual discharge in the spring

In a warmer climate, hydrologic regime shifts are likely to intensify although regional responses are expected due to each watershed's unique characteristics like elevation range and proximity to the 0°C air temperature threshold during the cold season. The largest changes in the timing of peak floods would be expected for those areas with a hydrologic regime that shifts from a freshet-dominated to rainfall dominated regime. Therefore, those watersheds with the thinnest snowpacks would be the most sensitive.

The RDCK can be sub-divided into five regions, each with a relatively different, typical snowpack depth (Figure D-3). Two of those five regions cover the clearwater watersheds. The typical snow depths for the clearwater watersheds ranges from moderate snowpack at high elevations for Goat River and Crawford Creek to moderate to deep snowpack for the remaining sites (Table D-2). The elevation range for each clearwater watershed is included in Table D-2 for reference. The clearwater watershed with largest projected change in precipitation as snow by 2050 is Lemon Creek (decrease of 252 mm) followed by Erie Creek Upstream End (decrease of 247 mm) and Keen Creek (decrease of 239 mm) as listed in Table D-1. Hydrographs based on representative hydrometric stations for each study area are presented at the end of the appendix for reference (Figure D-8 to Figure D-11).

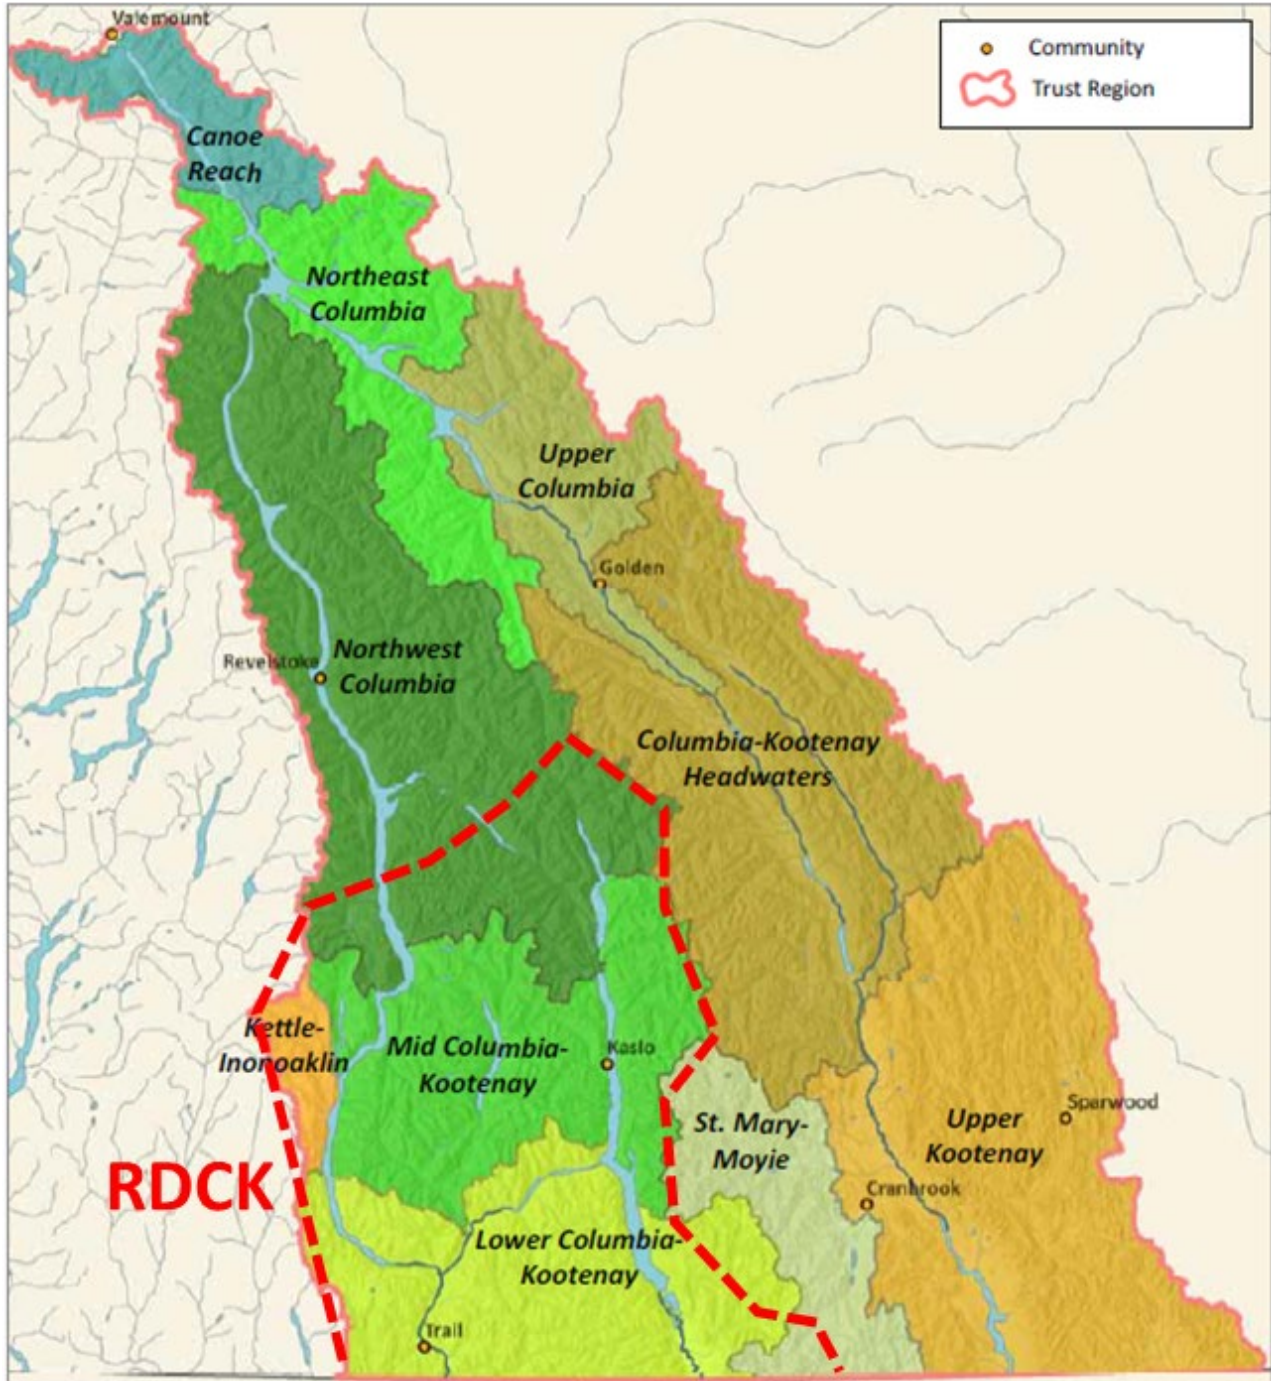


Figure D-3. Regions of the Columbia Basin as defined by patterns of climate and surface runoff. The RDCK contains 5 of these regions, 2 of which cover the clearwater watersheds (CBT, 2017)

Table D-2. Regions of the Columbia Basin covering the RDCK and their current relative snowpack depth (CBT, 2017).

Region	Existing Relative Snowpack Depth	Study Area	Representative Hydrometric Station	Clearwater Watersheds	Elevation Range (m)
Lower Columbia-Kootenay	Moderate snowpack at higher elevations	Goat River	08NH004	Goat River	532 to 2622
		Salmo River	08NE074	Erie Creek Upstream End	712 to 2287
Mid Columbia-Kootenay	Moderate to deep snowpack	Crawford Creek	ungauged watershed	Crawford Creek	530 to 2627
		Kaslo Creek	08NH005	Keen Creek	704 to 2797
				Upper Kaslo Creek	699 to 2670
				Kalso Creek at Kootenay Lake	549 to 2785
		Burton Creek	Ungauged watershed	Snow Creek	465 to 2731
				Burton at Arrow Lake	439 to 2785
				Caribou Creek	1117 to 2630
		Slocan River	08NJ013	Lemon Creek	538 to 2604
				Little Slocan River	498 to 2803
Slocan River	450 to 2973				

D.4. CLIMATE CHANGE IMPACT ASSESSMENT

Assessments of climate change impacts for all clearwater watersheds were performed to quantify the anticipated changes in the annual maximum discharge by 2050 (average between 2041 to 2070) under the RCP 8.5 emission scenario. The Engineers and Geoscientists British Columbia (EGBC) offer guidelines that include procedures to account for climate change when flood magnitudes for protective works or mitigation procedures are required (EGBC, 2018). BGC used four different approaches which can be classified into two statistically-based assessments and two process-based assessments to account for climate change in peak discharge, in consideration of the EGBC guidelines. The legislated guidelines as well as the two statistically-based and the two process-based assessment results are presented in the following sections.

D.4.1. Legislated Guidelines

The EGBC guidelines recommend that at-site time-series data (precipitation and/or discharge) be analyzed for statistically significant trends in magnitude or frequency. If no at-site data is available, nearby recorded precipitation or discharge records from watersheds of similar characteristics are to be used for assessment.

If a statistically significant trend is not detectable, the guidelines recommend that when regional discharge magnitude frequency relations are used, a 10% upward adjustment in design discharge is to be applied to account for likely future change in water input from precipitation.

If a statistically significant trend is detectable the guidelines recommend three different procedures.

1. For large basins in which the flows are seasonably driven, the flood magnitude and frequency are to be adjusted based on the best available regionally downscaled projections of annual precipitation and snowpack magnitude, assuming that the precipitation increment will all be added to peak runoff. For snowpack, compare projections with historical records of runoff from snowpacks of similar magnitude. Consider potential effects of plausible land use change and combine the effects if considered necessary.
2. For small basins adjust IDF curves for expected future precipitation and apply the results of stormwater runoff modelling appropriate for expected future land surface conditions.
3. Adjust expected flood magnitude and frequency according to the projected change in runoff during the life of the project, or by 20% in small drainage basins for which information of future local conditions is inadequate to provide reliable guidance. Consider potential effects of land use change in the drainage basin.

D.4.2. Statistically-based Assessment

Two statistically-based methods were developed to assess the effect of climate change on flood quantiles. The first method was based on an examination of the historical annual maximum flood series data to identify statistically significant trends (positive or negative). The second method was based on the index-flood model developed as part of the Regional Flood Frequency Analysis (Regional FFA) (see Appendix C) to estimate the climate-adjusted index flood using climate-adjusted variables derived from downscaled global circulation model (GCM) predictions (Wang et al., 2016). The two methods are described in more detail and results are presented in the following sections.

D.4.2.1. Discharge Trend Analysis

Statistical discharge trend analysis on the annual maximum series (AMS)¹ was performed on suitable hydrometric stations (e.g., sufficient period of record, not regulated) located within the watersheds of clearwater study areas and within the hydrological regions formed as part of the Regional FFA.

The presence of a trend (positive or negative) in the AMS was inferred to be caused, at least in part, by climate change. The Mann-Kendall (M-K) statistical test was used to conduct the trend analyses. The M-K test was preferred over alternative statistical tests because it is non-parametric, and therefore does not assume a functional relationship between time and discharge

¹ The Annual Maximum Series (AMS) is a time series of the largest peak discharge for each year.

magnitude. The M-K test detects consistently increasing or decreasing trends in time series. The M-K test examines for an absence of trend in the time series (the null hypothesis) and returns the probability that the null hypothesis (that there is no monotonic trend in the series) is true. Failing the null hypothesis would in turn suggest that there is a statistically significant temporal trend in the time series. The M-K test was applied only to hydrometric stations with periods of records which spanned the year 2000 to ensure the time series included the most current climate.

Although it was assumed that statistically significant trends were at least in part caused by climate change, changes to the watershed's land cover (e.g., wildfire, insect infestations, changes in land use) were considered as possible causes to trends in peak discharges. Furthermore, the peak flow records often capture a small window of the flood history at a given location. The limited record lengths make it difficult to differentiate between a long-term trend cause by climate change and the intrinsic climate variability captured in the time series. Consequently, the presence of a statistically significant trend in the peak flow time series could not be solely attributed to climate change.

D.4.2.1.1 Assessment of Discharge at Hydrometric Stations within Study Areas

One or more suitable hydrometric stations were identified on the Slocan, Kaslo and Salmo Rivers for trend analysis. A hydrometric station with historical discharge data is available on the Goat River (*Goat River Near Erickson* (08NH004)); however, the data at the hydrometric station cannot be used for assessment of trends as the hydrologic regime of the Goat River is regulated by a dam. Of the six hydrometric stations assessed for the three rivers, none were found to show strong or even weak evidence of a trend in the AMS.

Table D-3. Trend results for hydrometric stations within the clearwater study areas (where suitable hydrometric station exist).

Hydrometric Station	Name	Start Year	End Year	p-value	Trend Direction	Sen's Slope ¹
Slocan River						
08NJ013	Slocan River Near Crescent Valley	1914	2018	0.18	-	0.48
08NJ160	Lemon Creek Above South Lemon Creek	1973	2017	0.23	-	0.17
Kaslo River						
08NH005	Kaslo River Below Kemp Creek	1972	2017	0.32	-	-0.21
08NH132	Keen Creek Below Kyawats Creek	1974	2016	0.79	-	0.04
Salmo River						
08NE074	Salmo River Near Salmo	1949	2018	0.47	-	-0.29
08NE114	Hidden Creek Near the Mouth	1973	2016	0.73	-	0.02

D.4.2.1.2 Assessment of Discharge Trends within Homogenous Regions

Each clearwater watershed was assigned to a homogeneous region as part of the Regional FFA formed using cluster analysis. (see Section 4.5 in Appendix C). A trend analysis was performed on the annual peak discharge time series recorded at the hydrometric stations located within the homogeneous region assigned to the clearwater watersheds

D.4.2.1.2.1 1 West – for Watersheds < 500 km²

Within the “1 West – for watersheds less than 500 km²” hydrological region, one hydrometric station out of 15 reported a statistically significant trend ($p < 0.05$ - less than a 5% chance of rejecting the null hypothesis) in the flood series: *Kuskanax near Nakusp* (08NE006). The trend in the magnitude of the flood series for that station was in the decreasing direction (Table D-4).

Table D-4. Trend results for the hydrometric stations in the 1 West – for watersheds < 500 km² hydrologic region.

Hydrometric Station Code	Start Year	End Year	p-value	Trend Direction	Sen's Slope ¹
08LB038	1985	2016	0.246	-	0.33
08NP004	1995	2017	0.239	-	0.13
08NH131	1973	2004	0.444	-	0.19
08KA001	1969	2013	0.738	-	0.06
08NJ168	1983	2014	0.475	-	0.04
08NB014	1973	2017	0.431	-	-0.25
08NH132	1974	2016	0.795	-	0.04
08ND019	1973	2005	0.650	-	0.13
08NE006	1968	2011	0.006	Decreasing*	-1.33
08NK022	1977	2015	0.143	-	-0.19
08NG076	1973	2017	0.314	-	0.07
08KA009	1967	2018	0.881	-	-0.04
08KB006	1978	2015	0.386	-	0.20
08LE086	1997	2016	1.000	-	0.00
08KA010	1908	2015	0.118	-	-0.25

Notes:

1. The Sen's slope is a robust estimate of the magnitude of a trend and commonly used to identify the slope of a trend line in hydrological time series (Yue et al. 2002). It is considered robust because it is sensitive to outliers.
- * Strong evidence of trend ($p < 5\%$) – less than 5% chance that the null hypothesis – that there is no trend – is true.
- ** Weak evidence of trend ($p < 10\%$) – less than 10% chance that the null hypothesis – that there is no trend – is true.

D.4.2.1.2.2 1 West – for Watersheds > 500 km²

Within the “1 West – for watersheds greater than 500 km²” hydrological region, one out of 15 hydrometric stations reporting a statistically significant trend in the flood series (*Fraser River at Red Pass, 08KA007*) with a trend in the decreasing direction (Table D-5).

Table D-5. Trend results for the hydrometric stations in the 1 West – for watersheds > 500 km² hydrologic region.

Hydrometric Station Code	Start Year	End Year	p-value	Trend Direction	Sen's Slope ¹
08NB019	1985	2018	0.836	-	0.20
08NB012	1970	2017	0.818	-	0.11
08LE024	1973	2017	0.143	-	-1.07
08NP001	1929	2017	0.845	-	-0.06
08NK018	1973	2015	0.530	-	-0.23
08KA007	1955	2016	0.016	Decreasing*	-0.81
08NH130	1973	2012	0.990	-	0.00
08ND012	1964	2018	0.670	-	-0.11
08ND013	1964	2017	0.228	-	0.72
08NA006	1912	2017	0.317	-	-0.61
12358500	1940	2017	0.623	-	-0.45
08KA013	1998	2017	0.576	-	3.25
12355500	1911	2017	0.857	-	-0.11
08LE027	1915	2017	0.598	-	0.15
08NA011	1949	2018	0.319	-	-0.36

Notes:

- The Sen's slope is a robust estimate of the magnitude of a trend and commonly used to identify the slope of a trend line in hydrological time series (Yue et al. 2002). It is considered robust because it is sensitive to outliers.
- * Strong evidence of trend ($p < 5\%$) – less than 5% chance that the null hypothesis – that there is no trend – is true.
- ** Weak evidence of trend ($p < 10\%$) – less than 10% chance that the null hypothesis – that there is no trend – is true.

D.4.2.1.2.3 4 East – for Watersheds < 500 km²

Within the “4 East – for watersheds less than 500 km²” hydrological region, 19 hydrometric stations were analysed for presence of a trend (Table D-6). The M-K test identified two stations as having statistically significant trends in their time series with the first showing an increasing trend (*Boundary Creek near Porthill Idaho*, 12321500) and the second showing a decreasing trend (*Arrow Creek near Erickson*, 08NH084). Two other stations, *Redfish Creek near Harrop* (08NJ061) and *Outlet Creek near Metaline Falls* (12397100), were found to have marginally statistically significant decreasing trends ($p < 0.1$ - less than a 10% chance of rejecting the null hypothesis), while *St-Mary River below Morris Creek* (08NG077) was found to have a marginally statistically significant increasing trend ($p < 0.1$).

Table D-6. Trend results for the hydrometric stations in the 4 East – for Watersheds > 500 km² hydrologic region.

Hydrometric Station Code	Start Year	End Year	p-value	Trend Direction	Sen's Slope ¹
08NK026	1986	2018	0.332	-	-0.01
08NJ130	1945	2017	0.177	-	0.01
12321500	1929	2017	0.002	Increasing**	0.23
08NH084	1980	2015	0.009	Decreasing**	-0.30
08NH005	1972	2017	0.322	-	-0.21
08NE110	1971	2015	0.567	-	0.14
08NJ061	1968	2017	0.052	Decreasing**	-0.06
08NG077	1973	2017	0.083	Increasing*	0.50
08NN023	1974	2015	0.555	-	-0.12
08NE087	2001	2017	0.964	-	-0.01
08NH016	1947	2017	0.504	-	-0.02
08NJ160	1973	2017	0.229	-	0.17
12313000	1928	2002	0.386	-	1.58
08NJ026	1995	2017	0.239	-	0.13
12397100	1959	2015	0.065	Decreasing*	-0.07
08NE114	1973	2016	0.727	-	0.02
08NE039	1930	2017	0.507	-	-0.06
12304040	1990	2000	0.533	-	0.43
08NH115	1964	2017	0.303	-	0.00

Notes:

- 1 The Sen's slope is a robust estimate of the magnitude of a trend and commonly used to identify the slope of a trend line in hydrological time series (Yue et al. 2002). It is considered robust because it is sensitive to outliers.
- * Strong evidence of trend ($p < 5\%$) – less than 5% chance that the null hypothesis – that there is no trend – is true.
- ** Weak evidence of trend ($p < 10\%$) – less than 10% chance that the null hypothesis – that there is no trend – is true.

D.4.2.1.2.4 7 – for Watersheds > 500 km²

Within the “7 – for watersheds greater than 500 km²” hydrological region, 17 hydrometric stations were analysed for presence of a trend (Table D-7). The M-K test identified three USGS stations as having statistically significant decreasing trends in their time series: *Thompson River near Thompson Falls MT* (12389500), *Yaak River near Troy MT* (12304500), and *Yakima River at Umtanum, WA* (12484500). One other station, *Colville River at Kettle Falls, WA* (12409000), was found to have a marginally statistically significant increasing trend ($p < 0.1$).

Table D-7. Trend results for the hydrometric stations in the 7 – for Watersheds > 500 km² hydrologic region.

Hydrometric Station Code	Start Year	End Year	p-value	Trend Direction	Sen's Slope ¹
13339500	1980	2017	0.237	-	0.61
12414900	1966	2017	0.185	-	0.67
12433890	1972	2012	0.553	-	0.43
12354000	1911	2017	0.129	-	-0.98
12388200	1990	2010	0.124	-	0.77
12301300	1948	2016	0.189	-	-0.15
12365000	1931	2006	0.528	-	-0.08
12306500	1930	2017	0.983	-	0.00
12389500	1948	2017	0.044	Decreasing*	-0.55
12370000	1922	2017	0.290	-	-0.15
12304500	1948	2017	0.006	Decreasing*	-1.37
12302055	1948	2017	0.408	-	-0.35
12413000	1912	2017	0.542	-	0.75
12409000	1923	2017	0.076	Increasing**	0.13
12414500	1911	2017	0.935	-	0.00
12413500	1911	2017	0.125	-	1.67
12484500	1906	2017	0.021	Decreasing*	-0.70

Notes:

- 1 The Sen's slope is a robust estimate of the magnitude of a trend and commonly used to identify the slope of a trend line in hydrological time series (Yue et al. 2002). It is considered robust because it is sensitive to outliers.
- * Strong evidence of trend ($p < 5\%$) – less than 5% chance that the null hypothesis – that there is no trend – is true.
- ** Weak evidence of trend ($p < 10\%$) – less than 10% chance that the null hypothesis – that there is no trend – is true.

D.4.2.2. Statistical Flood Frequency Modelling

A statistical approach to estimating flood quantiles for the clearwater watersheds was performed using the Regional FFA model. The multivariate regression model to estimate the index-flood (mean annual peak flow) included three climatic variables as predictors: MAP, MAT, and PAS. This regression model was calibrated using historical values of climatic variables, thus representing current conditions.

To estimate the climate-adjusted index flood for 2050, projected values of the climatic variables were input to the regression model. These projected values were estimated from model ensemble results for the RCP 8.5 emissions scenario using the ClimateNA v5.10 software package, available at <http://tinyurl.com/ClimateNA>, and based on the methodology described by Wang et al. (2016). The historical and climate-adjusted MAP, MAT, and PAS for the clearwater watersheds in the RDCK region are presented in Table D-8.

Table D-8. Climate variables used in the index flood quantile regression model with historical and climate-adjusted values for the clearwater watersheds in the RDCK.

Study Area	Watershed	MAP		MAT		PAS	
		Historical Value	Climate-adjusted	Historical Value	Climate-adjusted	Historical Value	Climate-adjusted
Crawford Creek	Crawford Creek	1116	1175	3.0	6.4	590	384
Kaslo Creek	Keen Creek	1390	1472	1.3	4.9	857	618
	Upper Kaslo Creek	1244	1316	2.7	6.3	668	437
	Kalso Creek at Kootenay Lake	1312	1389	2.1	5.7	756	523
Burton Creek	Burton at Arrow Lake	1242	1315	2.4	5.9	704	483
	Caribou Creek	1259	1334	2.4	6.0	709	484
	Snow Creek	1227	1299	2.3	5.8	700	483
Slocan River	Little Slocan River	1161	1230	2.8	6.3	643	428
	Lemon Creek	1322	1404	2.7	6.3	754	503
	Slocan River	1224	1297	3.0	6.6	666	446
Goat River	Goat River	857	897	3.2	6.7	433	282
Salmo River	Erie Creek Upstream End	1265	1334	3.8	7.4	617	371

Note:

1. The ensemble model projections are averages across 15 CMIP5 models (CanESM2, ACCESS1.0, IPSL-CM5A-MR, MIROC5, MPI-ESM-LR, CCSM4, HadGEM2-ES, CNRM-CM5, CSIRO Mk 3.6, GFDL-CM3, INM-CM4, MRI-CGCM3, MIROC-ESM, CESM1-CAM5, GISS-E2R).

Climate-adjusted flood quantiles were calculated using the climate-adjusted index flood and the regional growth curves. The regional growth curves are assumed to be stationary. The ratio between the magnitude of the index-flood and the other flood quantiles was assumed to be the same in a climate-adjusted context. The regional growth curves are presented in the Regional FFA (Appendix C). Historical and climate-adjusted flood quantiles are summarized in Table D-9. Results show a small decrease in magnitude between the historical and climate-adjusted flood quantiles. Examination of the regression model for the index flood revealed that both the MAP and PAS were dominant predictors. The increase in the MAP was found to offset the decrease in the PAS resulting in little change in the estimate of the climate-adjusted index flood.

Table D-9. Historical and climate-adjusted flood quantiles for clearwater watersheds in the RDCK.

Study Area	Clearwater Watershed	Index-flood		2-year return period (0.5 AEP)		20-year return period (0.05 AEP)		200-year return period (0.005 AEP)	
		Historical (m ³ /s)	Climate-adjusted (m ³ /s)	Historical (m ³ /s)	Climate-adjusted (m ³ /s)	Historical (m ³ /s)	Climate-adjusted (m ³ /s)	Historical (m ³ /s)	Climate-adjusted (m ³ /s)
Crawford Creek	Crawford Creek	27	27	25	24	50	49	78	76
Kaslo Creek	Keen Creek	45	45	42	41	75	74	115	114
	Upper Kaslo Creek	38	37	34	34	70	68	109	106
	Kalso Creek at Kootenay Lake	81	80	74	73	150	148	234	230
Burton Creek	Burton at Arrow Lake	81	79	73	71	149	145	232	227
	Caribou Creek	42	41	38	37	78	76	121	119
	Snow Creek	45	44	41	40	83	81	129	126
Slocan River	Little Slocan River	103	100	94	91	191	186	297	289
	Lemon Creek	39	38	35	34	72	69	111	108
	Slocan River	347	339	315	308	642	627	1000	977
Goat River	Goat River	110	109	100	98	172	170	317	312
Salmo River	Erie Creek Upstream End	35	34	32	31	65	63	102	97

Note:

- Final flood quantiles for Upper Kaslo Creek, Kaslo Creek at Kootenay Lake, Lemon Creek, Little Slocan River, Slocan River, and Goat River were estimated using a pro-rated calculation because they are gauged by a hydrometric station. The flood quantiles reported in Table D-9 were not used for subsequent analysis.

D.4.3. Process-based Assessment

To complement the statistical assessment, results from process-based modelling were examined. Process-based models involve the direct application of the downscaled GCM model forecasts into hydrological models. Process-based assessments are better suited for situations where a threshold change in process is likely e.g., a transition from nival (snowmelt dominated) runoff regime to a pluvial-hybrid (snow influenced) runoff regime.

D.4.3.1. Climate-adjusted Discharge

PCIC provides simulated daily discharge time series for over 120 sites located in the Peace, upper Columbia, Fraser, and Campbell River watersheds. The time series are simulated at Water Survey of Canada (WSC) hydrometric stations and BC Hydro project sites. The simulated time series represent naturalized flow conditions (i.e., with effects of upstream regulation removed) for those sites affected by storage regulation. The hydrologic projections were forced with GCM data downscaled to a 1/16-degree resolution using Bias-Correction Spatial Disaggregation (BCSD) (Wood et al., 2004) following Werner (2011). Application of the Variable Infiltration Capacity (VIC) model and the generation of hydrologic projections for the Peace, Fraser, upper Columbia, and Campbell River watersheds are described in Shrestha et al. (2012) and Schnorbus et al. (2011, 2014).

An ensemble of 8 models forecasting daily discharge time series for locations near the study area was accessed from PCIC's website. This included forecasted time series on the Slocan and Salmo Rivers, specifically:

- Slocan River Near Crescent Valley (08NJ013)
- Salmo River Near Salmo (08NE074).

The RCP 8.5 emissions scenario was not available for this dataset so the IPCC A2 Emission Scenario (business as usual) was selected as the most similar. The 200-year flood quantile was assessed for three periods between 2009-2038, 2039-2068 and 2069-2098 and compared to the 200-year flood quantile based on the historical modelling (1955-2009). Maps showing the trend in the 200-year flood for the PCIC assessed sites and the location of the clearwater watersheds in the study for the three periods are shown in Figures D-4 to D-6 for the three periods assessed.

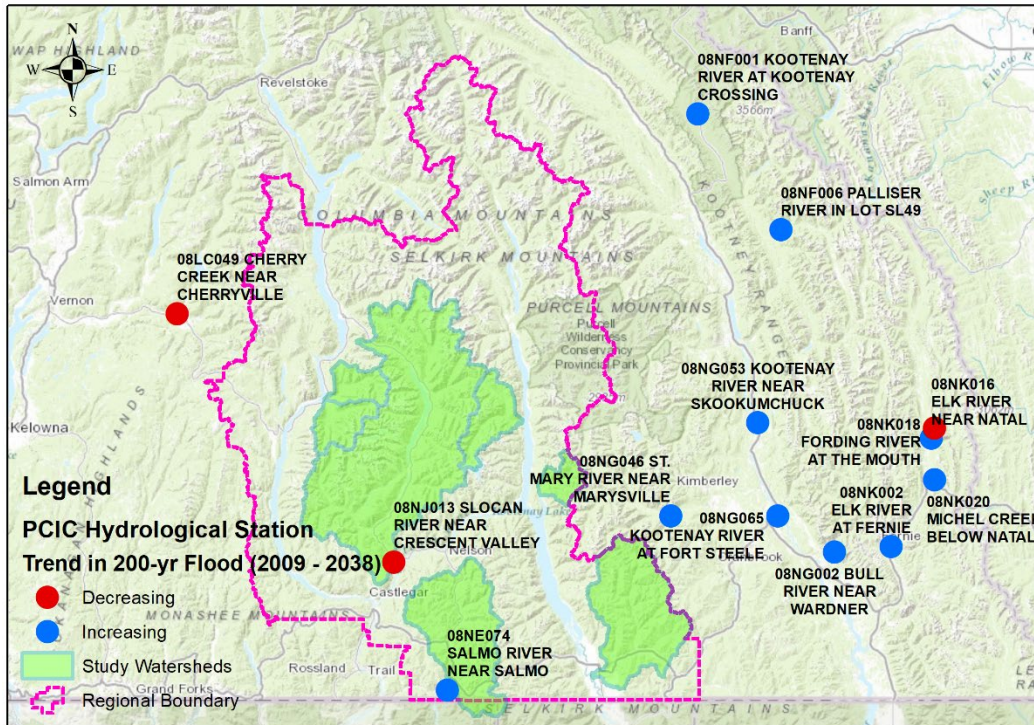


Figure D-4. Map showing nearby the PCIC hydrometric stations examined and their trend in the 200-year flood (period between 2009-2038).

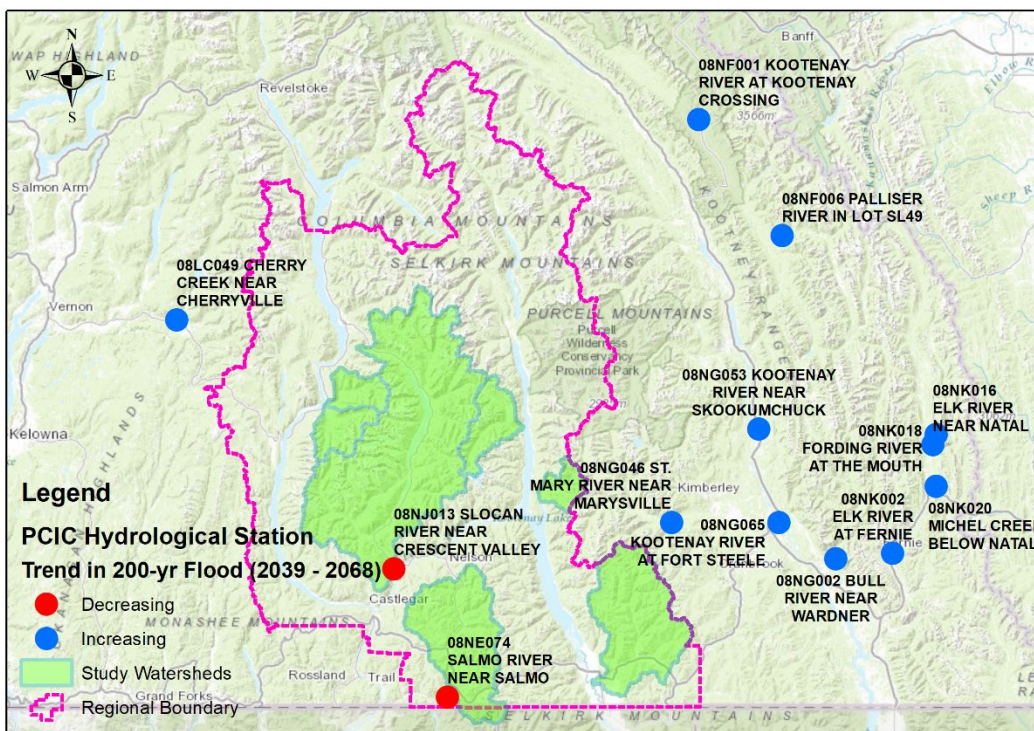


Figure D-5. Map showing nearby the PCIC hydrometric stations examined and their trend in the 200-year flood (period between 2039-2068).

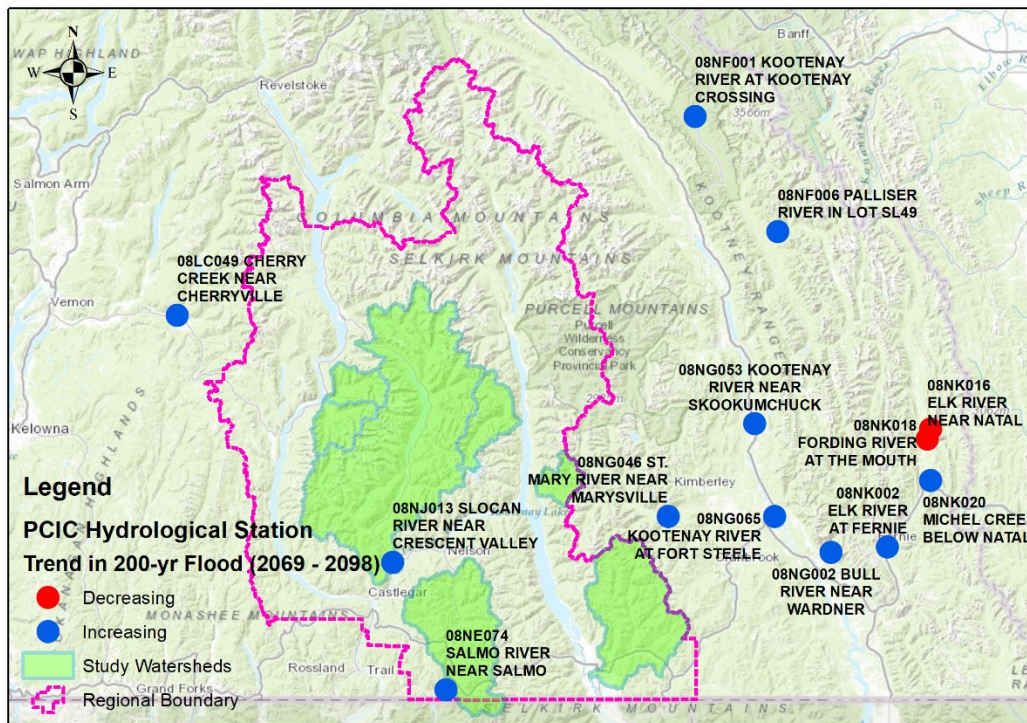


Figure D-6. Map showing nearby the PCIC hydrometric stations examined and their trend in the 200-year flood (period between 2069-2098).

The maps show that, in general, most of the thirteen stations examined show an increase in the magnitude of the 200-year flood over time with some exceptions based on an assessment of the mean of the eight models. A bar chart of the results for the individual hydrometric stations is shown in Figure D-7. The expected change in 200-year flood for the 2039-2068 period varies between -9% and +28% from the 1955-2009 period. For the 2069-2098 period, the range in the change of the 200-year flood magnitude increases from -7% and +60% from the 1955-2009 period. The mean of the predicted changes in the 200-year flood for Slokan River Near Crescent Valley (08NJ013) show virtually no change for the 2009-2038 period (-0.1%) followed by a small decrease and small increase for the 2039-2068 (-5%) and 2069-2098 (+16%) periods respectively. The mean of the predicted changes in the 200-year flood for Salmo River Near Salmo (08NE074) show a small increase for the 2009-2038 period (+8%) followed by small decrease for the 2039-2068 period (-97%) followed by a large increase for the 2069-2098 period (+60%).

Boxplots of the results for the three periods for the eight model runs are provided in Figure D-12a and Figure D-12b. The boxplots provide a sense of the uncertainty in the analysis by the considerable range in the estimated 200-year flood quantile. Of note, the PCIC hydrologic model output was found by BGC to poorly predict historical flood quantiles.

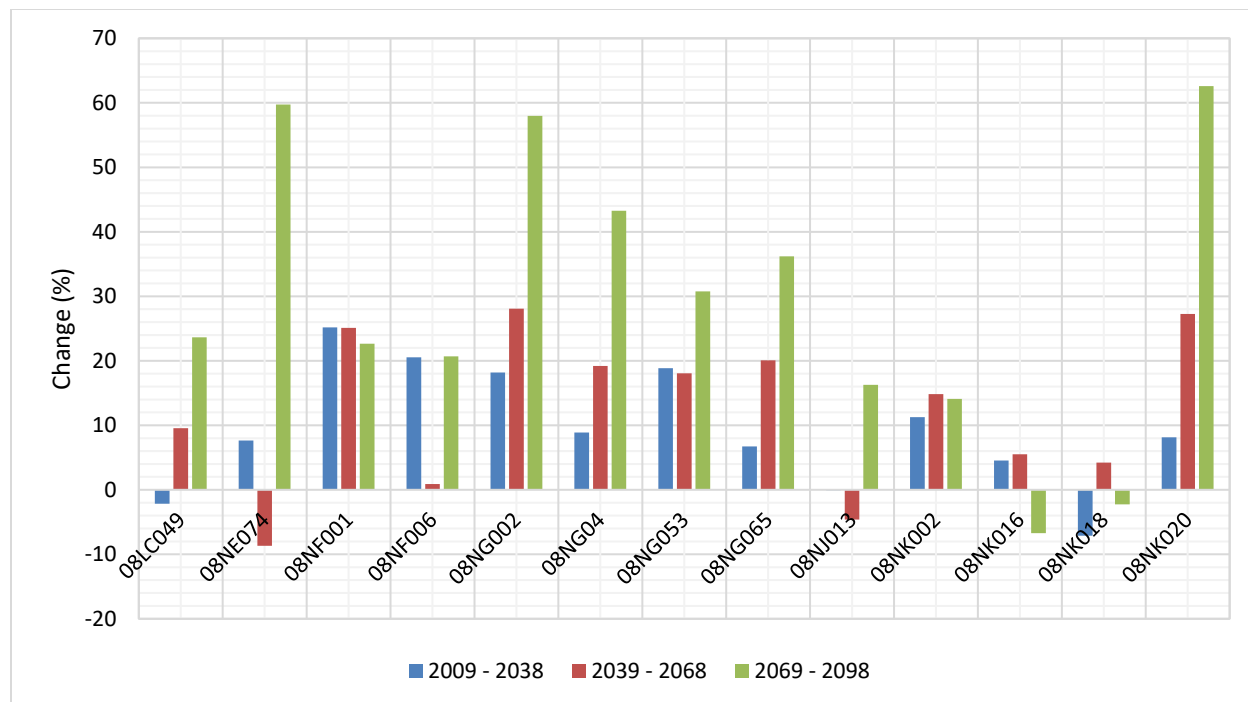


Figure D-7. Bar-graph of the PCIC hydrometric stations and their change in the magnitude of the 200-year flood for the three periods examined compared to the 1955-2009 historical period. Note that Station 08NJ013 and 08NE074 are stations located on the Slocan and Salmo Rivers respectively.

D.5. SUMMARY

The EGBC guidelines, summarized in Section D.4.1, offer procedures to account for climate change when flood magnitudes for protective works or mitigation procedures are required (EGBC, 2018). The guidelines recommend that at-site (or nearby) time-series data be analyzed for statistically significant trends. If a statistically significant trend is not detectable, the guidelines recommend that a 10% upward adjustment in design discharge is to be applied to account for likely future change in water input from precipitation. If a statistically significant trend is detectable the guidelines recommend three different procedures including consideration of 1) regionally downscaled projections of annual precipitation and snowpack magnitude, 2) adjustment of IDF curves for expected future precipitation, and or 3) adjustment of the expected flood magnitude and frequency according to the projected change in runoff during the life of the project, or by 20% in small drainage basins for which information of future local conditions is inadequate to provide reliable guidance.

For this study, the impacts of climate change on peak discharge estimates by 2050 (2041 to 2070) were assessed by BGC using statistical and processed-based methods. The statistical methods included a trend assessment on historical flood events using the Mann-Kendall test as well as the application of climate-adjusted variables (mean annual precipitation, mean annual temperature,

and precipitation as snow) to the Regional FFA model. The process-based methods included a trend analysis for climate-adjusted flood and precipitation data offered by the PCIC.

The results of the statistical and process-based methods were found to be inconsistent across the RDCK by 2050 (2041 to 2070). Most of the discharge assessed from hydrological regions did not indicate statistically significant trends. The trends that were found were also not consistent with some showing an increasing trend while others a decreasing trend. The results of the statistical flood frequency modelling generally predict a small decrease in the flood magnitude, while the results of the process-based modelling of discharge generally show an increase with a wide range in magnitude. The results of the process-based assessment of the IDF quantiles show an increase during the 1961-1990 and 1971-2000 historical period and then are projected to remain generally constant until 2050. The wide range in magnitude can be a function of many variables including catchment characteristics (e.g., proportion of catchment elevation above a given threshold) which were not explicitly addressed in this assessment.

D.6. CONCLUSION

The climate change impact assessment results were difficult to synthesise in order to select climate-adjusted peak discharges on a site-specific basis. The assessment of the trends in the discharge records was inconclusive. The results of the statistical flood frequency modelling generally show a small decrease in the flood magnitude, while the results of the process-based discharge modelling generally show an increase with a wide range in magnitude. As a result, peak discharge estimates were adjusted upwards by 20% to account for the uncertainty in the impacts of climate change in the RDCK.

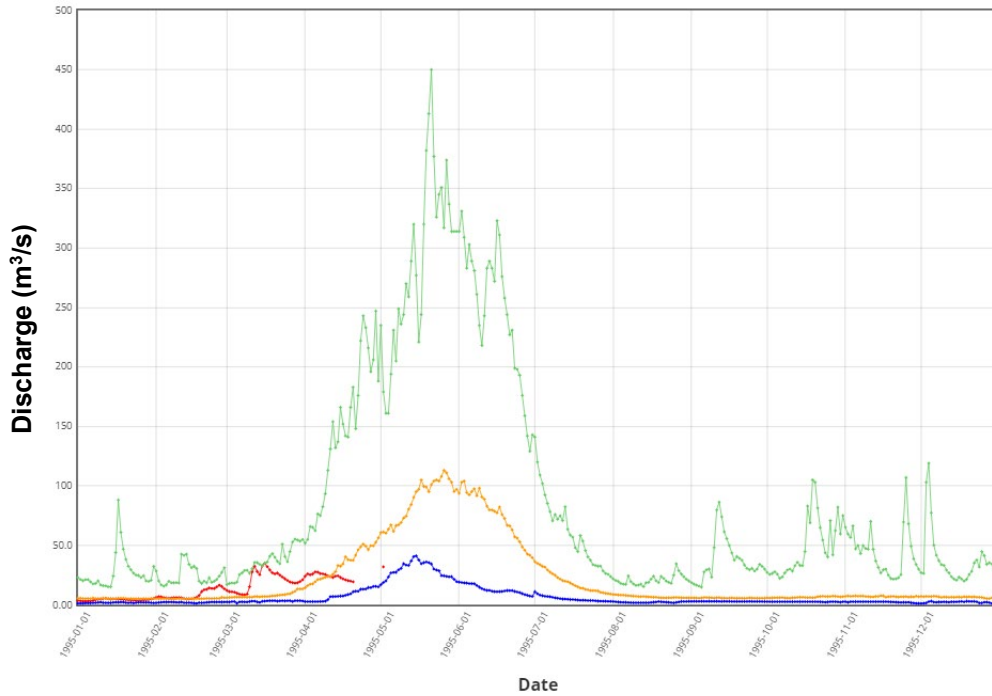


Figure D-8. Example freshet-driven hydrologic regime for Goat River near Erickson (08NH004). Green line is the maximum discharge, the blue line is the minimum discharge, the orange line is the median discharge, and the red line is the 1995 discharge.

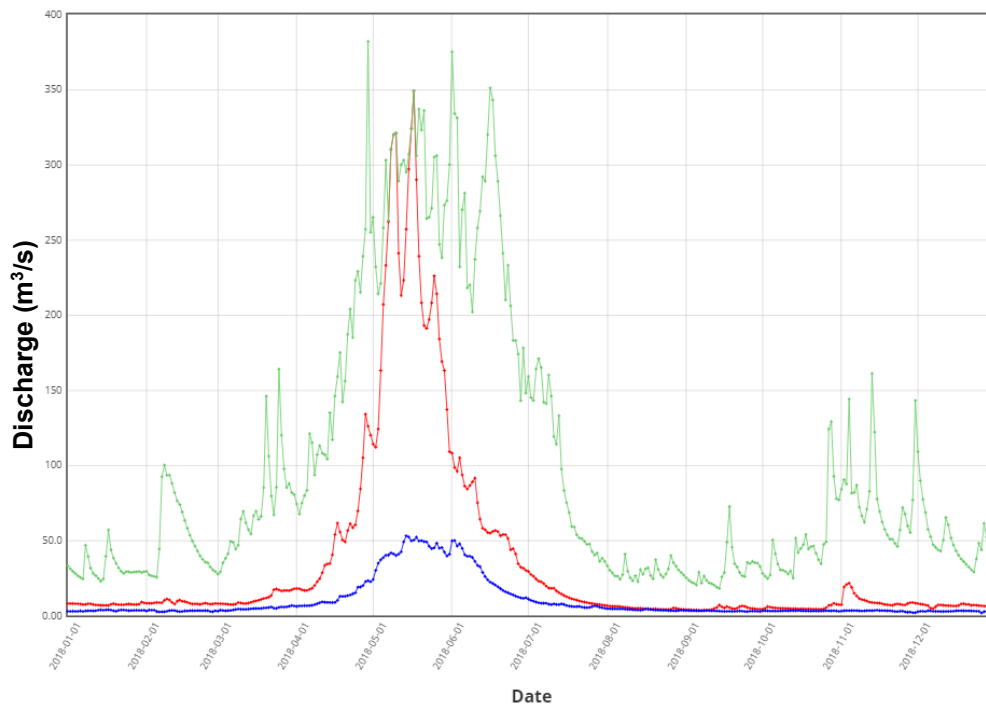


Figure D-9. Example freshet-driven hydrologic regime for Salmo River near Salmo (08NE074). Green line is the maximum discharge, the blue line is the minimum discharge, and the red line is the 2018 discharge.

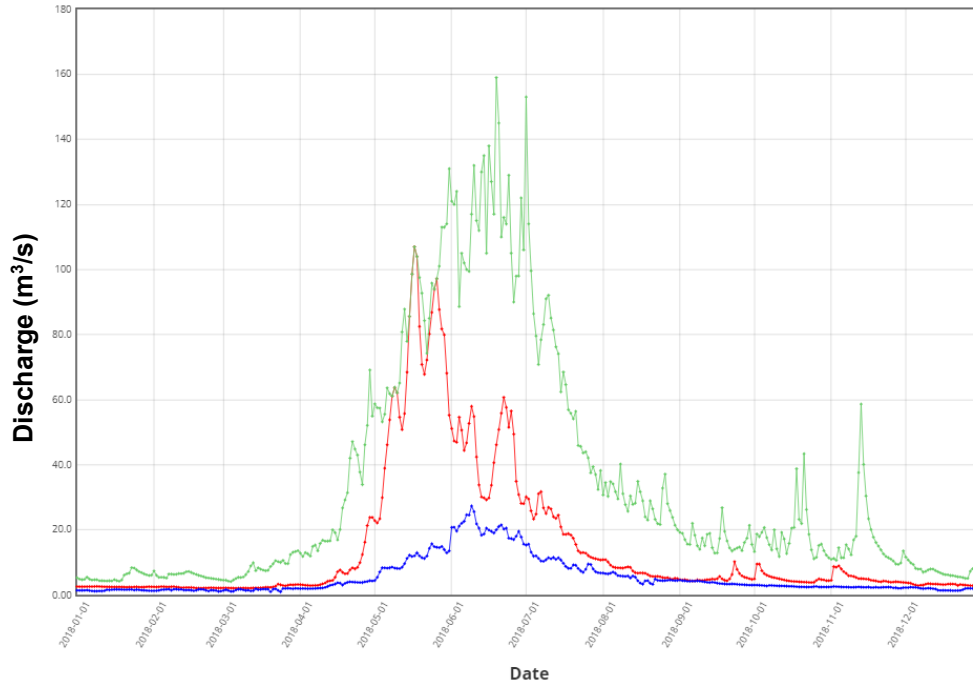


Figure D-10. Example freshet-driven hydrologic regime for Kaslo below Kemp Creek (08NH005). Green line is the maximum discharge, the blue line is the minimum discharge, and the red line is the 2018 discharge.

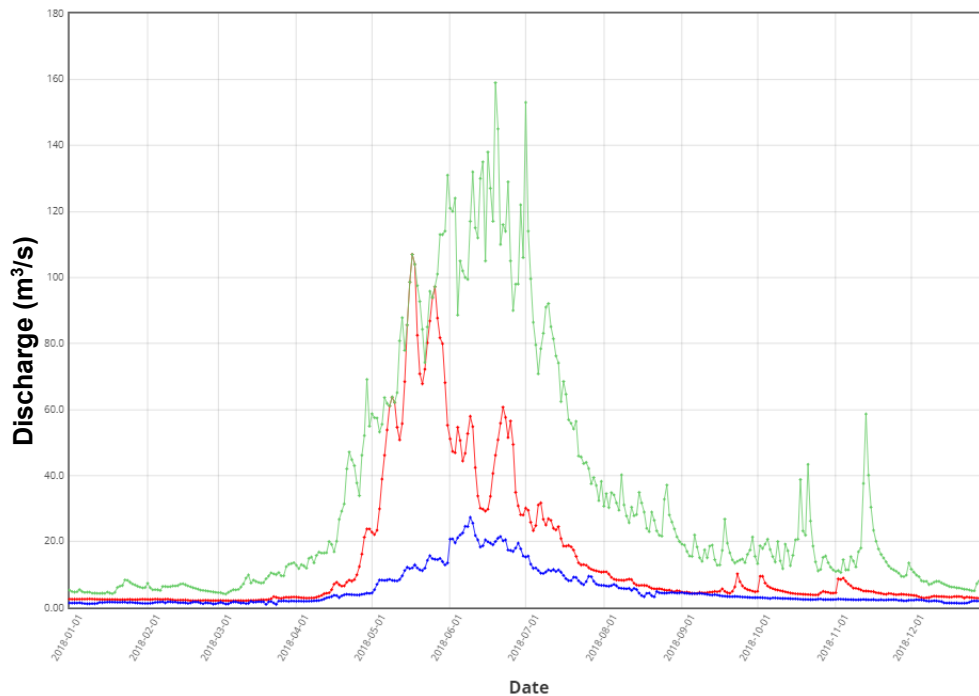


Figure D-11. Example freshet-driven hydrologic regime for Slocan River near Crescent Valley (08NJ013). Green line is the maximum discharge, the blue line is the minimum discharge, and the red line is the 2018 discharge.

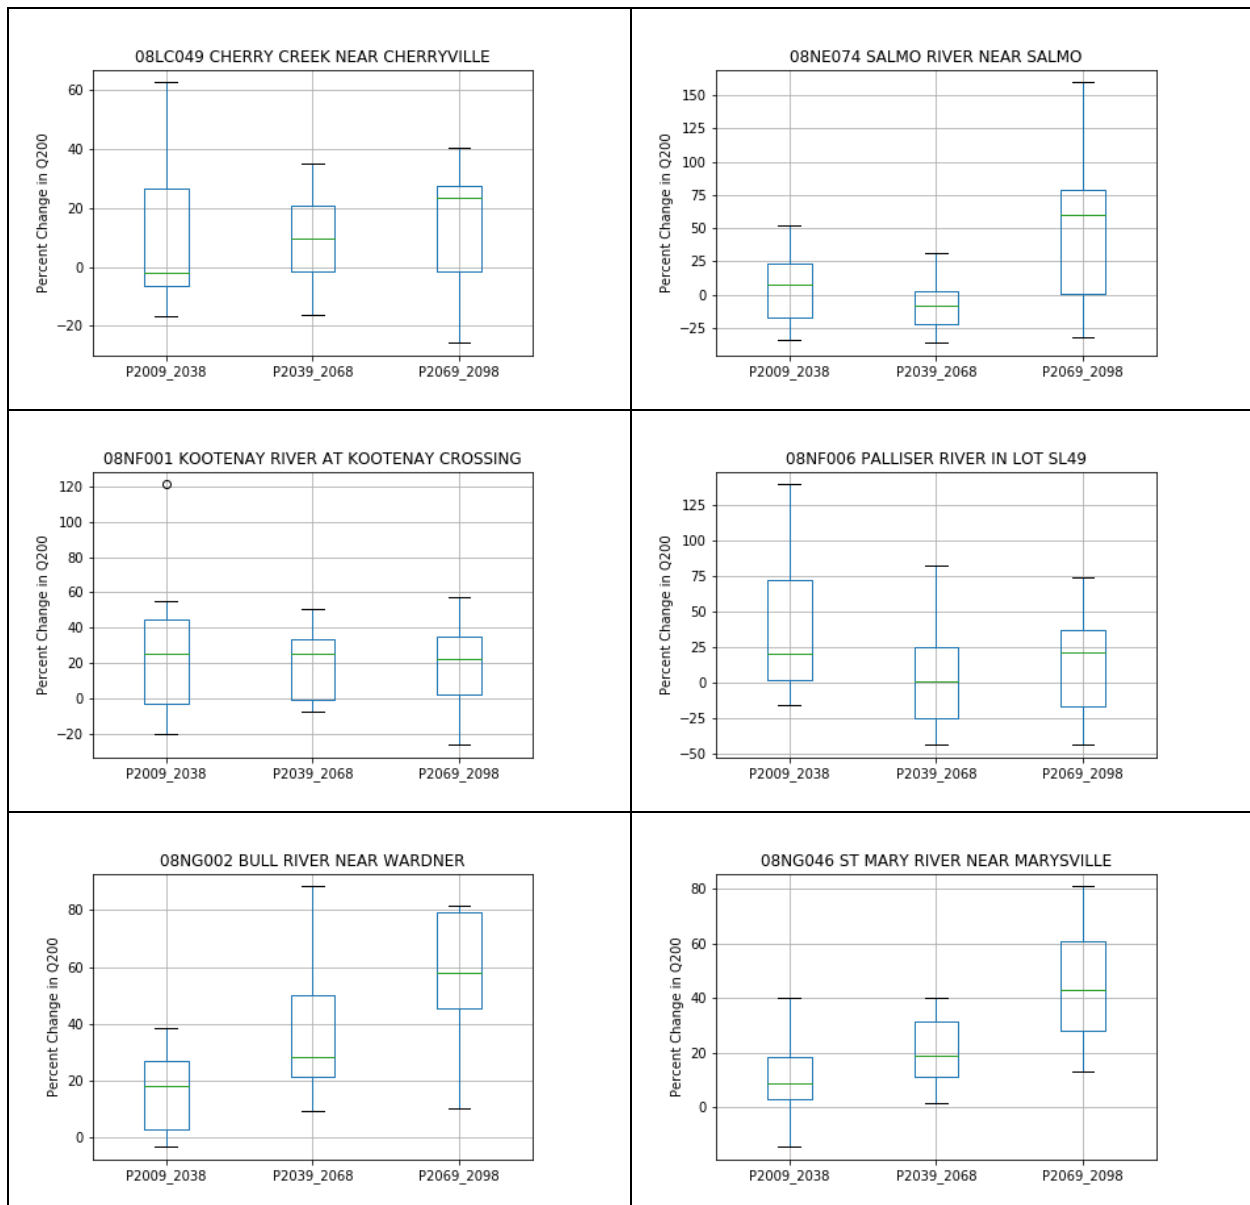


Figure D-12a. Boxplots of the PCIC Hydrological Stations and their change in the magnitude of the 200-year flood for the three periods examined compared to the 1955-2009 historical period. Boxplots represent the interquartile range from the ensemble of 8 GCM models.

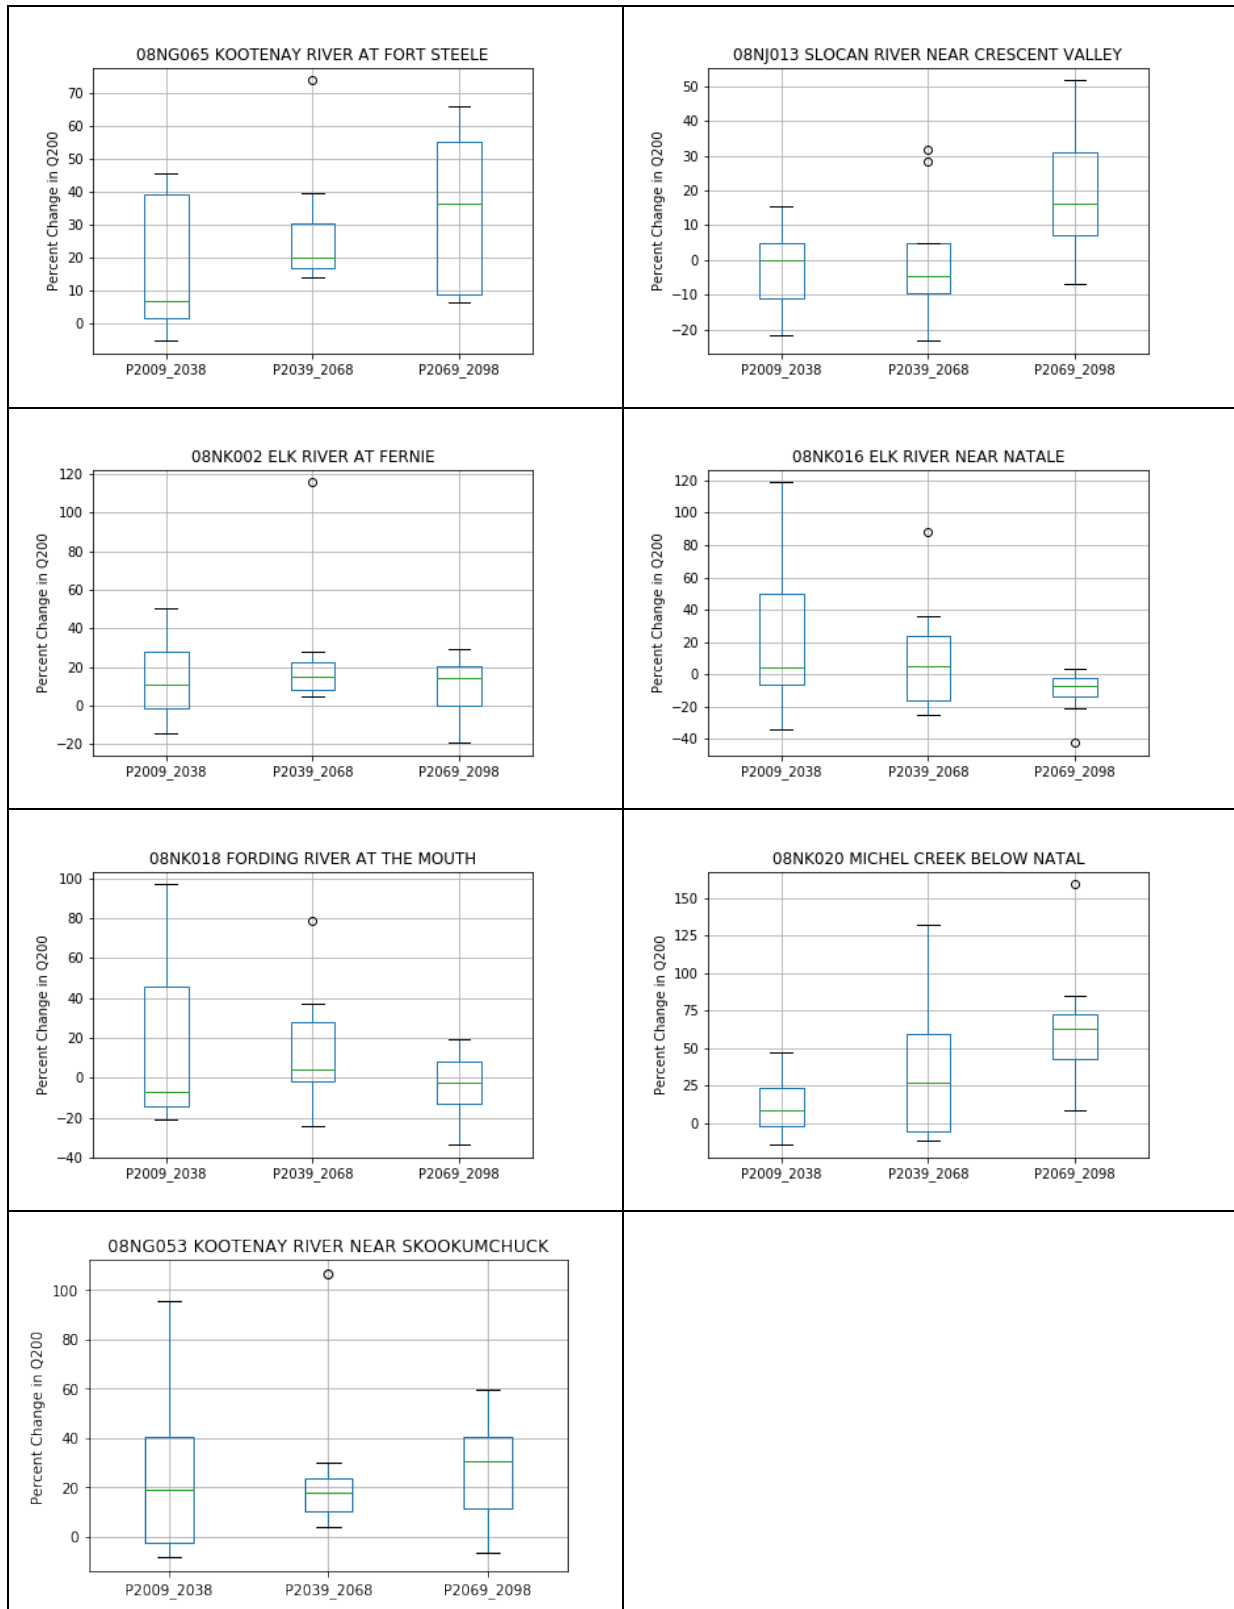


Figure D-12b. Boxplots of the PCIC Hydrological Stations and their change in the magnitude of the 200-year flood (continued).

REFERENCES

- Barnett, T. P., Pierce, D. W., Hidalgo, H. G., Bonfils, C., Santer, B. D., Das, T., ...Mirin, A. A. (2008). Human-induced changes in the hydrology of the western United States. *Science*, 319(5866), 1080–1083.
- Columbia Basin Trust (CBT). (2017). *Water Monitoring and Climate Change in the Upper Columbia Basin – Summary of Current Status and Opportunities*.
- Déry, S. J., Stahl, K., Moore, R., Whitfield, P., Menounos, B., & Burford, J. E. (2009). Detection of runoff timing changes in pluvial, nival, and glacial rivers of western Canada. *Water Resources Research*, 45, W04426. <https://doi.org/10.1029/2008WR006975>
- Eaton, B. & Moore, R. (2010) Regional hydrology. In R. Pike, T. Redding, R. Moore, R. Winkler, K. Bladon (Eds), *Compendium of Forest Hydrology and Geomorphology in British Columbia, Land Management Handbook 66, Vol 1, BC* (Chap 4). Ministry of Forests and Range, Forest Science Program and FORREX Forum for Research and Extension in Natural Resources: Victoria, BC and Kamloops, BC, URL <http://www.for.gov.bc.ca/Lmh/Lmh66.htm>
- Engineers and Geoscientists BC (EGBC). (2018). *Professional Practice Guidelines – Legislated Flood Assessments in a Changing Climate in BC*. Version 2.1.
- Farjad, B., Gupta, A., & Marceau, D.J. (2016). Annual and seasonal variations of hydrological processes under climate change scenarios in two sub-catchments of a complex watershed. *Water Resources Management*, 30(8), 2851-2865. <https://doi.org/10.1007/s11269-016-1329-3>
- Harder, P., Pomeroy, J.W., & Westbrook, C.J. (2015). Hydrological resilience of a Canadian Rockies headwaters basin subject to changing climate, extreme weather, and forest management. *Hydrological Processes*, 29, 3905-3924. <https://doi.org/10.1002/hyp.10596>
- Kang, D.H., Shi, X., Gao, H., & Déry, S. J. (2014). On the changing contribution of snow to the hydrology of the Fraser River basin, Canada. *Journal of Hydrometeorology*, 15(4), 1344–1365.
- Knutti, R., Massin, D., & Gettelman, A. (2013). Climate model genealogy: Generation CMIP5 and how we got there. *Geophysical Research Letters*, 40(6), 1194-1199. <https://doi.org/10.1002/grl.50256>
- Loukas, A. & Quick, M.C. (1999). The effect of climate change on floods in British Columbia. *Nordic Hydrology*, 30(3), 231-256. <https://doi.org/10.2166/nh.1999.0013>
- Pacific Climate Impacts Consortium (PCIC). (2011). *Hydrologic Impacts of Climate Change in the Peace, Campbell and Columbia Watersheds, British Columbia, Canada: Hydrologic Modeling Project Final Report (Part II)*.
- Pacific Climate Impacts Consortium (PCIC). (2012). Plan2Adapt. Retrieved from <https://www.pacificclimate.org/analysis-tools/plan2adapt>.

- Pacific Climate Impacts Consortium (PCIC). (2013). Climate Summary for: Kootenay / Boundary Region. Retrieved from https://www.pacificclimate.org/sites/default/files/publications/Climate_Summary-Kootenay-Boundary.pdf
- Pacific Climate Impacts Consortium (PCIC). (2014). Station Hydrologic Model Output. Downloaded from https://data.pacificclimate.org/portal/hydro_stn/map/ on November 2019.
- Pacific Climate Impacts Consortium (PCIC). (2019). Statistically Downscaled Climate Scenarios. Downloaded from https://data.pacificclimate.org/portal/downscaled_gcms/map/ on November 2019. Method: BCCAQ v2.
- Prein, A.F., Rasmussen, R.M., Ikeda, K., Liu, C., Clark, M.P., & Holland, G.J. (2017). The future intensification of hourly precipitation extremes. *Nature Climate Change*, 7, 48-52. <http://dx.doi.org/10.1038/nclimate3168>
- Schnorbus, M.A., Bennett, K.E., Werner, A.T., & Berland, A.J. (2011). *Hydrologic Impacts of Climate Change in the Peace, Campbell and Columbia Watersheds, British Columbia, Canada*. Pacific Climate Impacts Consortium, University of Victoria, Victoria, BC, 157 p.
- Schnorbus, M., Werner, A., & Bennett, K. (2014). Impacts of climate change in three hydrologic regimes in British Columbia, Canada. *Hydrological Processes*, 28, 1170-1189. <https://doi.org/10.1002/hyp.9661>
- Shrestha, R.R., Schnorbus, M.A., Werner, A.T., & Berland, A.J. (2012). Modelling spatial and temporal variability of hydrologic impacts of climate change in the Fraser River basin, British Columbia, Canada. *Hydrological Processes*, 26, 1840–1860. <https://doi.org/10.1002/hyp.9283>.
- Wang, T., Hamann, A., Spittlehouse, D.L., & Carroll, C. (2016). Locally downscaled and spatially customizable climate data for historical and future periods for North America. *PLoS One* 11, e0156720. <https://doi.org/10.1371/journal.pone.0156720>
- Werner, A. T., 2011: BCSD downscaled transient climate projections for eight select GCMs over British Columbia, Canada. Pacific Climate Impacts Consortium, University of Victoria, Victoria, BC, 63 p.
- Whitfield, P.H., Cannon, A.J., & Reynolds, C.J. (2002). Modelling streamflow in present and future climates: examples from the Georgia Basin, British Columbia. *Canadian Water Resources Journal*, 27(4), 427–456. <https://doi.org/10.4296/cwrj2704427>
- Wood, A.W., Leung, L.R., Sridhar, V., & Lettenmaier, D.P. (2004). Hydrologic implications of dynamical and statistical approaches to downscaling climate model outputs. *Climate Change*, 62, 189–216. <https://doi.org/10.1023/B:CLIM.0000013685.99609.9e>.

APPENDIX E HYDRAULIC ASSESSMENT METHODS

E.1. INTRODUCTION

This appendix describes the approach used to develop the hydraulic model to represent 20-, 200- and 500-year flood events and estimate their corresponding flood extents for the Burton Creek study area. The following section details the methodology followed to develop the model including the development of Digital Elevation Models (DEM) for the channel and floodplain, the choice of modelling software, and the development of the hydraulic model. A discussion of the modelling assumptions and limitations is also included.

All water surfaces profiles were estimated using the HEC-RAS 2D version 5.0.7. HEC-RAS is a public domain hydraulic modeling program developed and supported by the United States Army Corps of Engineers. (Brunner & CEIWR-HEC, 2016).

E.2. MODELLING SOFTWARE

All water surfaces profiles were estimated using the HEC-RAS 2D version 5.0.7. HEC-RAS is a public domain hydraulic modeling program developed and supported by the United States Army Corps of Engineers. (Brunner & CEIWR-HEC, 2016).

For this study, a 2D hydraulic model was selected. The 2D model provides more detailed information on the flow depths and velocities than a 1D model. A 2D model also removes some of the subjective modelling techniques which are involved in the development of 1D models such as defining ineffective flow areas, levee markers and cross-section orientation.

A limitation of 2D models in HEC-RAS 5.0.7 is with the modelling of bridges. The 2D flow areas cannot model high-flows (e.g., when the water surface elevation is greater than the low cord of the bridge). Incorporation of bridge piers can be accomplished within the 2D flow area using fine mesh elements, but it comes at a significant computational cost. To address this, 1D models were created and used to check the water surface elevations at bridges against the 2D models.

E.3. MODEL DOMAIN AND BOUNDARY CONDITIONS

The model domain covers the two primary creeks which make up the Burton study area; Burton Creek and the Caribou Creek tributary. In addition, Snow Creek which is also tributary to Burton Creek was also included in the model (Figure E-1). The downstream end of the model domain extends approximately 1000 m out into Lower Arrow Lake to ensure that the lake boundary condition does not affect the discharge through the Highway 6 bridge.

The upstream model domains extend well past the extent of the bathymetric surveys ensure that the location of the boundary condition does not impact the model results. The channel patterns of Burton and Caribou Creeks include sections containing multiple-threaded channels referred to as anabranching (Eaton et al., 2010) which are not suitable for setting inlets to the models. The inlet for Caribou Creek is located 6 km upstream from the Highway 6 bridge and 1.8 km upstream from the maximum extent of the bathymetric survey and downstream from the junction with Goat Canyon Creek. Burton Creek and Snow Creek were modelled sufficiently far upstream to avoid the large section of anabranching which occurs upstream of the junction. The main branch of

Burton Creek is modelled 7 km upstream of the Highway 6 bridge, approximately 400 m upstream of a bridge located along the Burton-Snow Forest Service Road. Snow Creek extends 3.5 km upstream from the junction with Burton Creek. The edges of the domain were set far enough from the estimated maximum water level to ensure that the edges do not influence the results.

The inlet boundary conditions for Burton, Snow and Caribou Creeks used an unsteady inflow hydrograph that ramped the discharge up from a minimal discharge to the peak discharge for the scenario (see Section E.8) for the first hour, then remaining at constant at the peak discharge until the model reached steady state. The outlet boundary condition was a constant stage water level for Lower Arrow Lake.

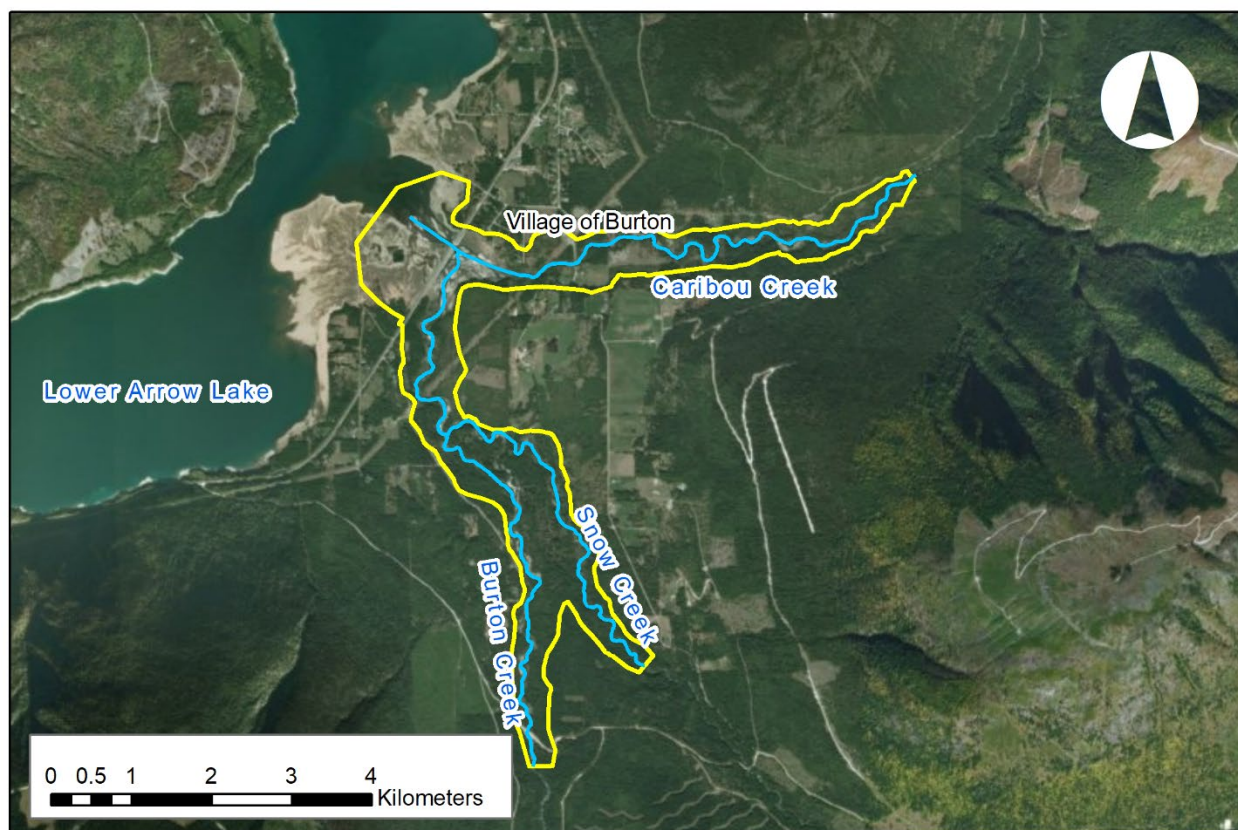


Figure E-1. Crawford Creek Study Area Modelling Domain. The Burton Flats are visible to the south of the outlet of the Creeks into Lower Arrow Lake.

E.4. TERRAIN PREPARATION

Detailed topographic data of the floodplain are available from a high-resolution LiDAR dataset obtained by BGC from RDCK. The LiDAR was flown in late July 2018. The water level on Lower Arrow Lake during the acquisition was approximately 439.70 masl.

BGC contracted Explore Surveys Inc. (Explore) to conduct a detailed bathymetric survey of the Caribou, Burton Creek and Lower Arrow Lake. The survey was conducted from November 4 to 22, 2019; survey extents are shown in Drawing 02. Bathymetric survey covered most of the

modelled extent of Caribou Creek and Burton and Snow Creeks. Sonar was used to collect the bathymetry within Lower Arrow Lake and the estuary upstream from the Highway 6 bridge.

The bathymetry was integrated with the LiDAR to generate a 1.0-meter resolution DEM to produce the model terrain for HEC-RAS which is used as the main component of the model. Additional processing was performed along the three bridges along Caribou Creek to ensure the channel profile of the bridge, particularly under the bridge deck, was maintained.

E.5. MODEL MESHING

The HEC-RAS software for 2D modelling uses an irregular mesh to simulate the flow of water over the terrain. Irregular meshes are useful for development of numerically efficient 2D models to allow refinement of the model in locations where the flow is changing rapidly and/or where additional resolution is desired. With 2D models the objective is to define a model with sufficient accuracy and resolution that minimizes model runtime.

The default cell geometries created by HEC-RAS are rectangular but other geometries can be selected to suit the problem under consideration. Within HEC-RAS, a 2D mesh is generated based on the following inputs:

- The model perimeter (the model domain or extent of the model)
- Refinement areas to define sub-domains where the mesh properties (e.g., mesh resolution) is adjusted
- Breaklines to align the mesh with terrain features which influence the flow such as dikes, ditches, terraces and embankments. HEC-RAS provides options to adjust the mesh resolution along breaklines if the modeler chooses.

From these inputs, HEC-RAS generates the mesh consisting of computational points at the cell centroid and the faces of the cells.

For the Burton Study area, a base model resolution of 5 meters was selected. The mesh resolution reflects the fact that the slope of the study area is steep and therefore a smaller mesh is better suited for capturing the steeper gradients. A mesh refinement area was defined along the main channels of the creeks. This refinement area extended out into Arrow Lake to accurately capture the flow contraction and expansion through the Highway 6 bridge. The refinement area used a mesh resolution of 2.5 meters and a hexagonal mesh was selected (eight-sides) rather than the standard 4-sided mesh.

The three creeks contain sections of multiple threaded channels referred to as anabranching (Eaton et al., 2010). These channels convey flow outside of the main channel during flows above bankfull conditions. The anabranching channels were captured using breaklines with a mesh resolution of 2.5 meters with a buffer of three cells wide on either side. Terrain features such as the terraces were captured using breaklines to which the mesh was aligned. Breaklines were also placed along the centerline of the bridges with a mesh resolution of 2.5 meters with a buffer of three cells wide on either side to capture the flow through the bridges.

The mesh was cleaned and checked for errors such as a cell having more than 8 faces, computational points closer than 1.5 meters and gaps in the mesh created with the channel and bridge breaklines are enforced. The final mesh consisted of 330,000 computational cells with an average cell face length of 4 m and average cell area of 12 m².

The final mesh consisted of over 330,000 computational cells with an average cell face length of 4 m and average cell area of 12 m². A summary of the mesh characteristics is given in Table E-1 and an example of the mesh developed is given in Figure E-2.

Table E-1. Mesh characteristics.

Element	Mesh Resolution (m)	Repeats	Hexagonal Mesh?
Perimeter	5	0	
Refinement Area	2.5	0	Yes
Channel Breaklines	2.5	3	-
Bridge Breaklines	2.5	3	-
Terrain Breaklines	-	-	-

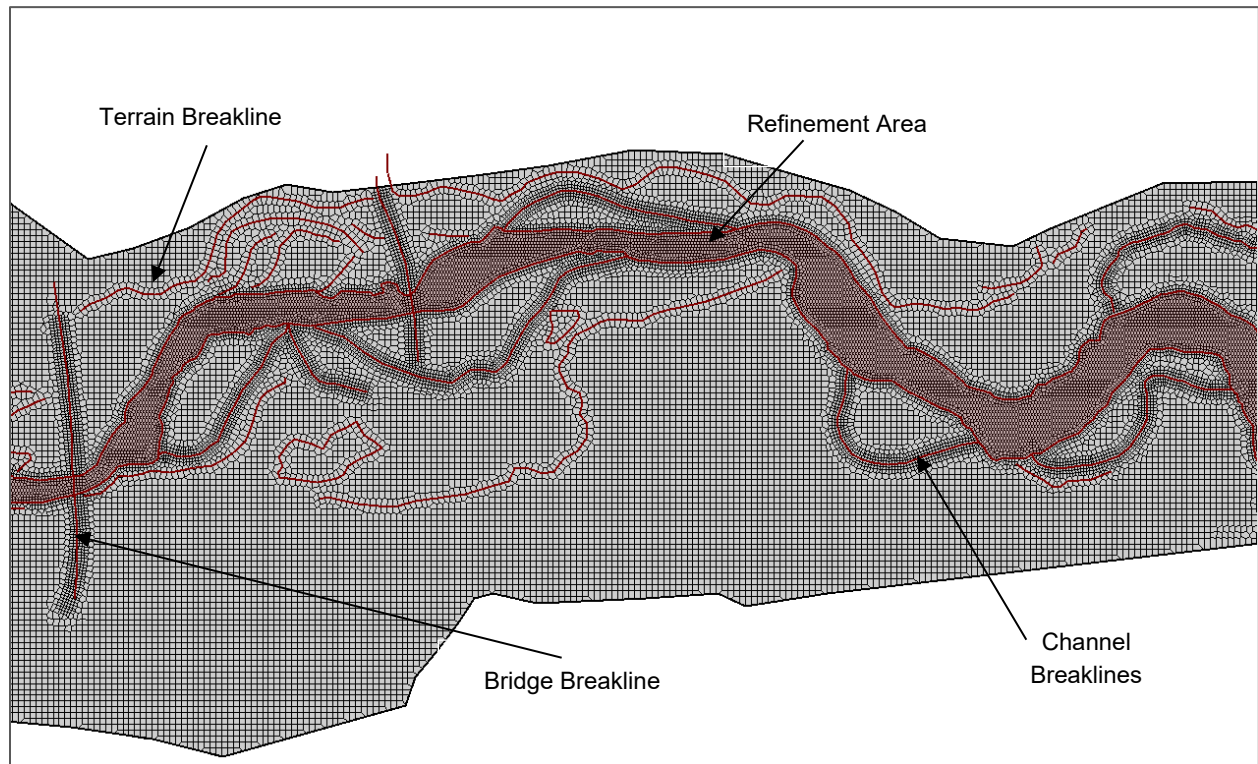


Figure E-2. Example of the mesh developed for the model showing the breaklines and refinement areas.

E.6. HYDRAULIC ROUGHNESS

In common with many hydraulic models, HEC-RAS 2D uses the Manning’s roughness coefficient (Manning’s n) to represent the hydraulic flow roughness. Measured flow and water level data for high-flow events were not available for either Burton or Caribou Creeks, and therefore the model is uncalibrated. The Manning’s n values were therefore selected with guidance from the literature and using empirical equations.

Manning’s n values for floodplain areas are based on land cover types (Figure E-3) with Manning’s n values for each land cover type from Chow (1959). The spatial land cover distributions were imported from digital land cover maps from the North American Land Change Monitoring System (NRCan, 2019).

The gradient of the main channels of Burton, Snow and Caribou Creeks in the study area generally ranges between 1% to 3%. Manning’s n value for the main channel was estimated using Jarrett’s steep-creek equation (Jarrett 1984):

$$n = 0.39S^{0.38}R^{-0.16}$$

where S is the energy slope and R is the hydraulic radius of the stream (in units of feet). Jarrett’s equation is based on 75 observations of streams in Colorado. His streams were composed of bed material ranging from cobbles to small boulders. The range of energy slopes were 0.2 % to 9% and range of hydraulic radii were 0.15 to 2.1 m.

The value varies along the length of the channels but an average value of 0.076 was selected for the main sections of the three creeks, upstream of the bay formed by the Highway 6 causeway where the channel gradients were steep. A HEC-RAS 1D model was used to guide the selection of an appropriate Manning’s n in the channel to generally maintain the Froude number below 1 (e.g. subcritical flow) along the channel with the exception of the constrictions at the bridges. A check on the Froude number was also performed in the final 2D model. A sensitivity on the model results to the Manning’s n is performed in Section E.10

Table E-2. Associating land class with Manning’s n.

Land Class	Manning's n	Colour
1. Temperate or sub-polar needleleaf forest	0.1	
2. Sub-polar taiga needleleaf forest	0.1	
5. Temperate or sub-polar broadleaf deciduous forest	0.1	
6. Mixed Forest	0.1	
8. Temperate or sub-polar shrubland	0.07	
10. Temperate or sub-polar grassland	0.035	
14. Wetland	0.044	
15. Cropland	0.035	
17. Urban and Built-up	0.025	

Land Class	Manning's n	Colour
Burton and Caribou Creeks	0.076	
Caribou Creek	0.076	
Estuary	0.044	
Lower Arrow Lake	0.034	

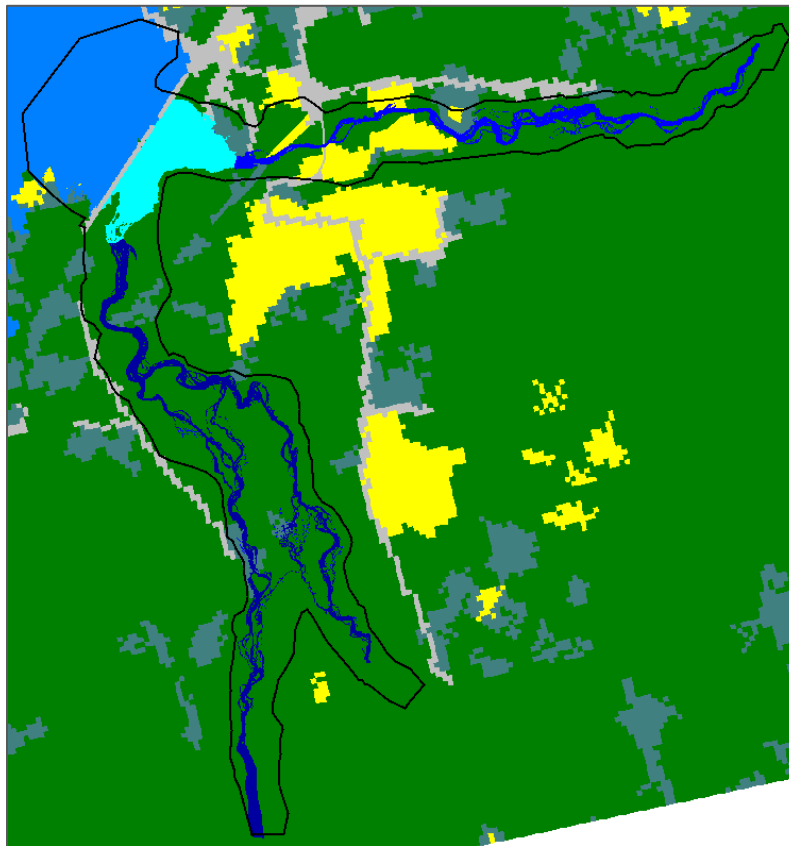


Figure E-3. Manning's n Roughness Layer defined for the model. See Table E-1 for legend.

E.7. HYDRAULIC STRUCTURES

Within the Burton Creek model domain there are three bridges (Figure E-4). A fourth bridge is also located near the inlet on Burton Creek on the Burton-Snow Forest Service Road but was not considered within the model as it is sufficiently far from the reporting area. Several culverts are also located along the Highway 6 embankment, but these were not considered in the modelling as they are small and not likely to have an impact on the discharge of flow from the estuary to Arrow Lake. No managed or orphaned dikes were observed along the three creeks.

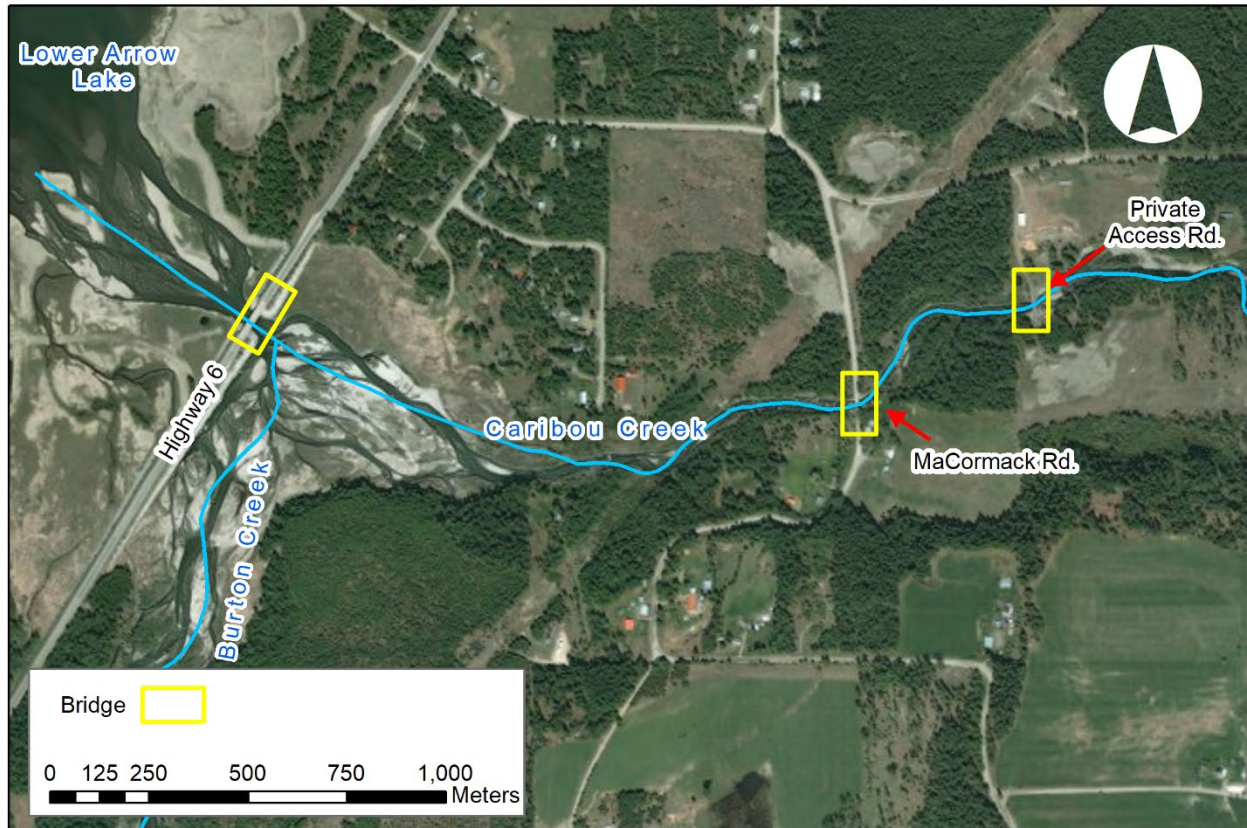


Figure E-4. Location of the Highway 6, McCormack Road and Private Access Road bridges along Caribou Creek.

Modelling bridges within HEC-RAS 2D presents challenges as there is no direct functionality to incorporate them into the model as with HEC-RAS 1D. A HEC-RAS 1D model was used to analyze the water profiles through the bridges and used to compare against the 2D models for the different peak flow discharges. A summary of the bridge dimensions is shown in Table E-3. Assessment of the water surface elevations for the peak discharges considered in this study from the 1D models found that in all cases the water surface elevation remained below the low-cord of the bridge decks. Therefore, the bridge decks were not included in the HEC-RAS 2D models. The following sections provide a summary of the 1D models to the final 2D models at the bridges.

Table E-3 Study area bridge dimensions.

Bridge	Highway 6	McCormack Road	Private Access Road
Top deck elevation (m) ¹	446.06	451.41	455.79
Bottom deck elevation (m) ²	444.57	449.74	454.52
Deck Span (m)	72.9	17.8	22.0
Deck Thickness (m)	1.6	1.7	1.3
Deck Width (m)	11.5	6.0	5.5

Bridge	Highway 6	McCormack Road	Private Access Road
Number of Piers	2	0	0
Pier Thickness (m)	1.4		
Shape of Piers	Circular		
Pier Construction	Concrete		

Notes:

1. Measured from upstream side.
2. Based on the lowest side along the bridge.

E.7.1. Bridge on Private Access Road

The bridge on the Private Access Road is a Pony Plate Girder Bridge located approximately 350 m upstream from the McCormack Rd bridge. It has a span of 22.0 m and a width of 5.5 m (Figure E-5). The bridge is 'perched' in that the road is at the floodplain ground level and only within the immediate area of the bridge does the road rise above the ground level to span the watercourse (see Figure E-6).



Figure E-5. Downstream of the Private Access Road bridge on Caribou Creek. Photo: Explore, October 24, 2019.

Figure E-6 shows the water surface profiles under the Private Access Rd. bridge for the 1D and 2D models for the 200 and 500-year peak flows. The 1D and 2D depths are similar underneath the bridge but different on the floodplain. The non-uniform profile under the bridge for the 2D model result is caused by the horizontal curve in the channel upstream of the crossing resulting

in a super elevated profile. The difference in the water surface elevations on the right and left floodplains attributed to the higher accuracy of the 2D model in simulating split flows. Both models demonstrate that there is approximately 74 cm of clearance (freeboard) from the low cord of the bridge for the 200-year peak water level, and 56 cm of clearance for the 500-year peak flow water level. Figure E-7 demonstrates the very similar water surface profiles along the centerline of the channel for the 200-year peak discharge for the 1D and 2D models. Again, both models show very similar results.

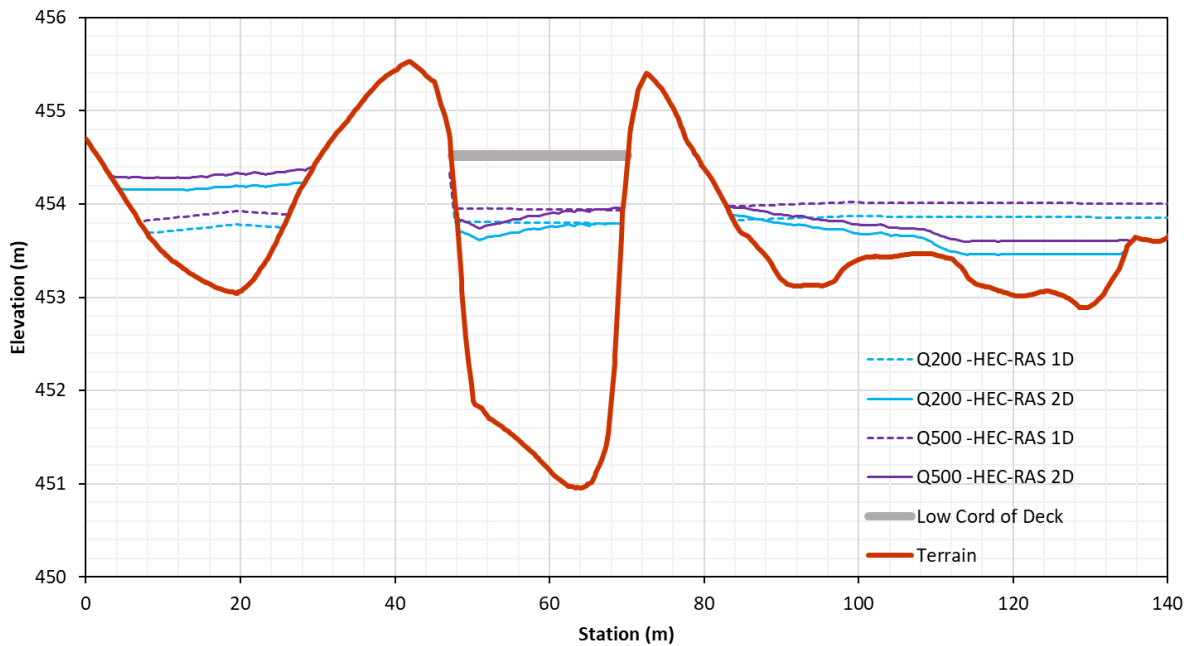


Figure E-6. Modelled 200 and 500 -year discharge under the Private Access Road bridge from the HEC-RAS 1D and 2D models.

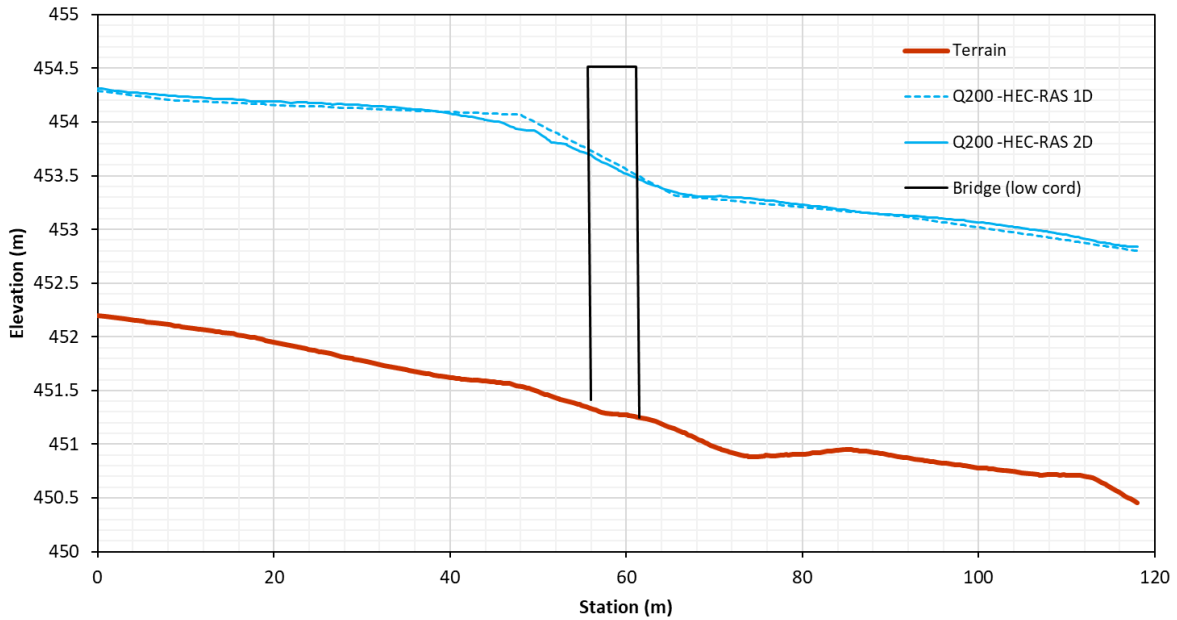


Figure E-7. Profile of the modelled 200-year discharge under the Private Access Road bridge from 2D and 1D HEC-RAS models.

E.7.2. McCormack Road Bridge

The bridge on the McCormack Road is located approximately 1 km upstream from the Highway 6 bridge. The wooden-decked bridge is shown in Figure E-8.



Figure E-8. Downstream of the McCormack Road bridge on Caribou Creek. Photo: BGC, November 22, 2019.

Figure E-9 shows the water surface profiles under the McCormack Road bridge for the 1D and 2D models for the 200 and 500-year peak discharges. There is a 62 cm and 35 cm difference between the 1D and 2D water surface elevations for the 200 and 500-year peak discharges. Figure E-10 shows the water surface profiles along the centerline of the channel for the 200-year peak discharge for the 1D and 2D models. The difference in the profiles between the two models is localized to 25 m upstream and 20 m downstream of the bridge, beyond with the profiles converge

The clearance for the 200-year peak discharge from the low cord of the bridge is 2.13 m for the 2D model and 1.46 m for the 1D model. The clearance for the 500-year peak discharge from the low cord of the bridge is 1.62 m for the 2D model and 1.46 m for the 1D model. The non-uniform profile under the bridge for the 2D model result is caused by the curve in the channel upstream of the crossing resulting in a super elevated profile.

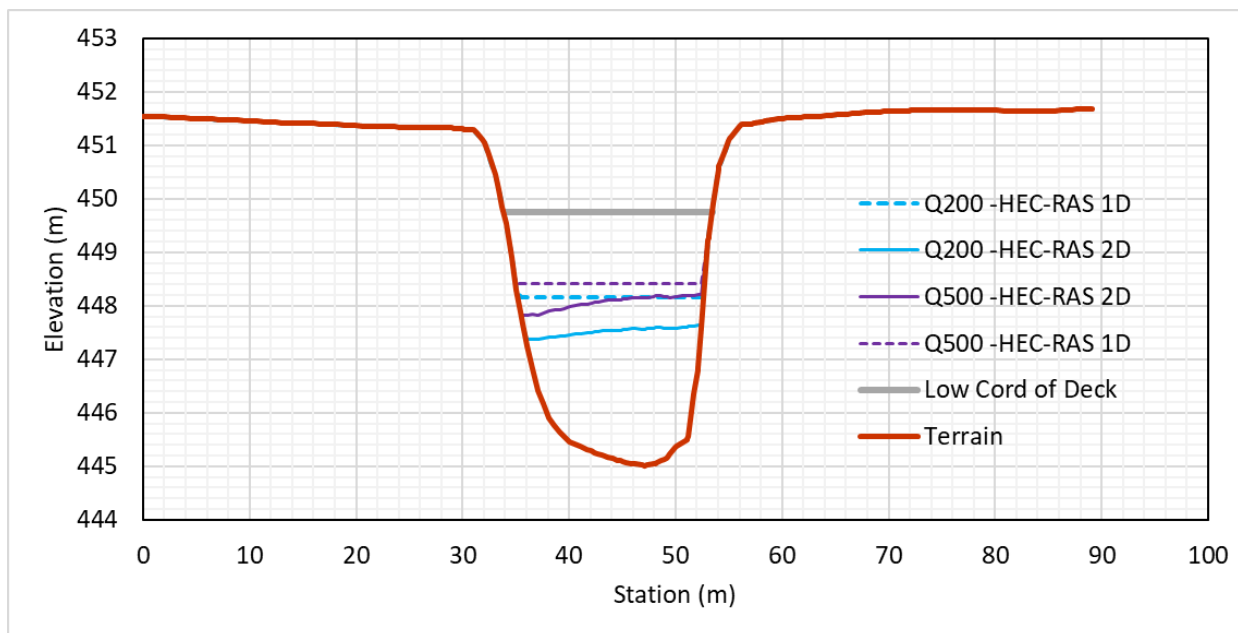


Figure E-9. Modelled 200 and 500-year discharge under the McCormack Road bridge from the HEC-RAS 1D and 2D models.

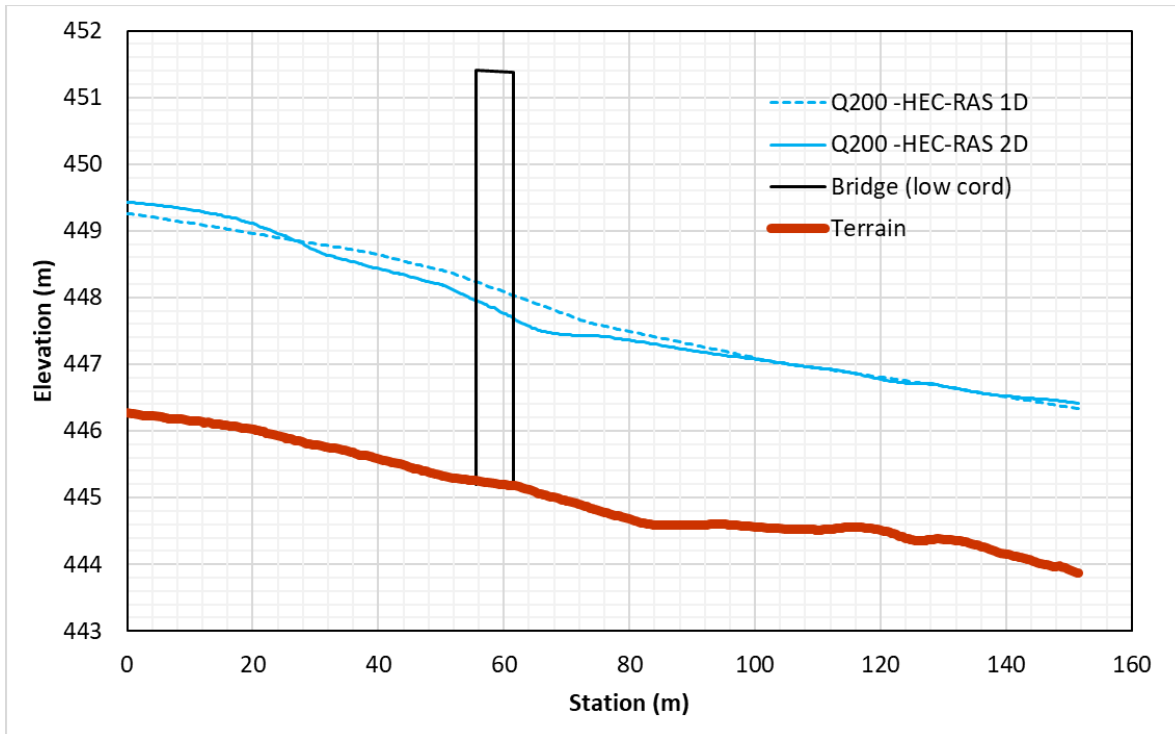


Figure E-10. Profile of the modelled 200-year discharge under the McCormack Road bridge from 2D and 1D HEC-RAS models.

E.7.3. Highway 6 Bridge

The bridge on Highway 6 is located along the long embankment that crosses Lower Arrow Lake and forms an bay at the outlets of Burton and Caribou Creeks from Lower Arrow Lake (Figure E-11). The bridge has a span of 72.9 m and width of 11.5 m and is supported by two circular concrete piers (Figure E-12).



Figure E-11. View looking east of the Highway 6 causeway and bridge over Lower Arrow Lake in the foreground: BGC, July 3, 2019. The outlet of Caribou Creek is on the left and the outlet of Burton Creek is on the right. BGC August 2019.



Figure E-12. Upstream of the Highway 6 bridge looking west towards Lower Arrow Lake. Photo: Explore, October 19, 2019.

Figure E-13 shows the water surface profiles under the Highway 6 bridge for the 1D and 2D models for the 200 and 500-year peak discharges. The HEC-RAS 1D model incorporated the two piers in the model and modelled using the momentum equation. Despite the inclusion of the piers, a negligible difference in the water surface for both peak discharges and between the 1D and 2D models was noted. The clearance for the 200-year peak discharge from the low chord of the bridge approximately 3.74 m. Figure E-14 demonstrates little difference between the centreline water surface profiles along the centerline of the channel for the 200-year peak discharge for the 1D and 2D models. Again, there is a negligible little difference in the water surface elevation is between the models.

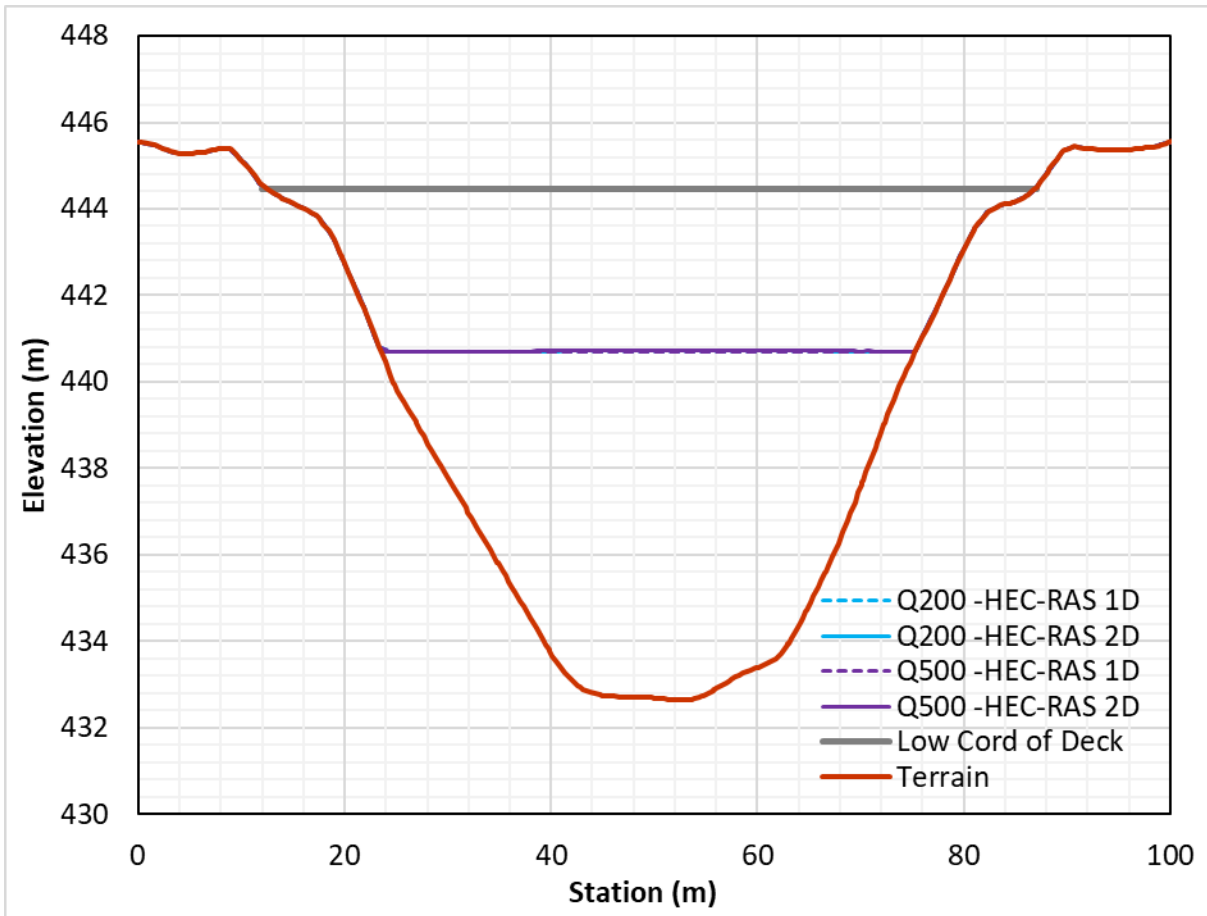


Figure E-13. Modelled 200- and 500-year discharge under the Highway 6 bridge from the HEC-RAS 1D and 2D models.

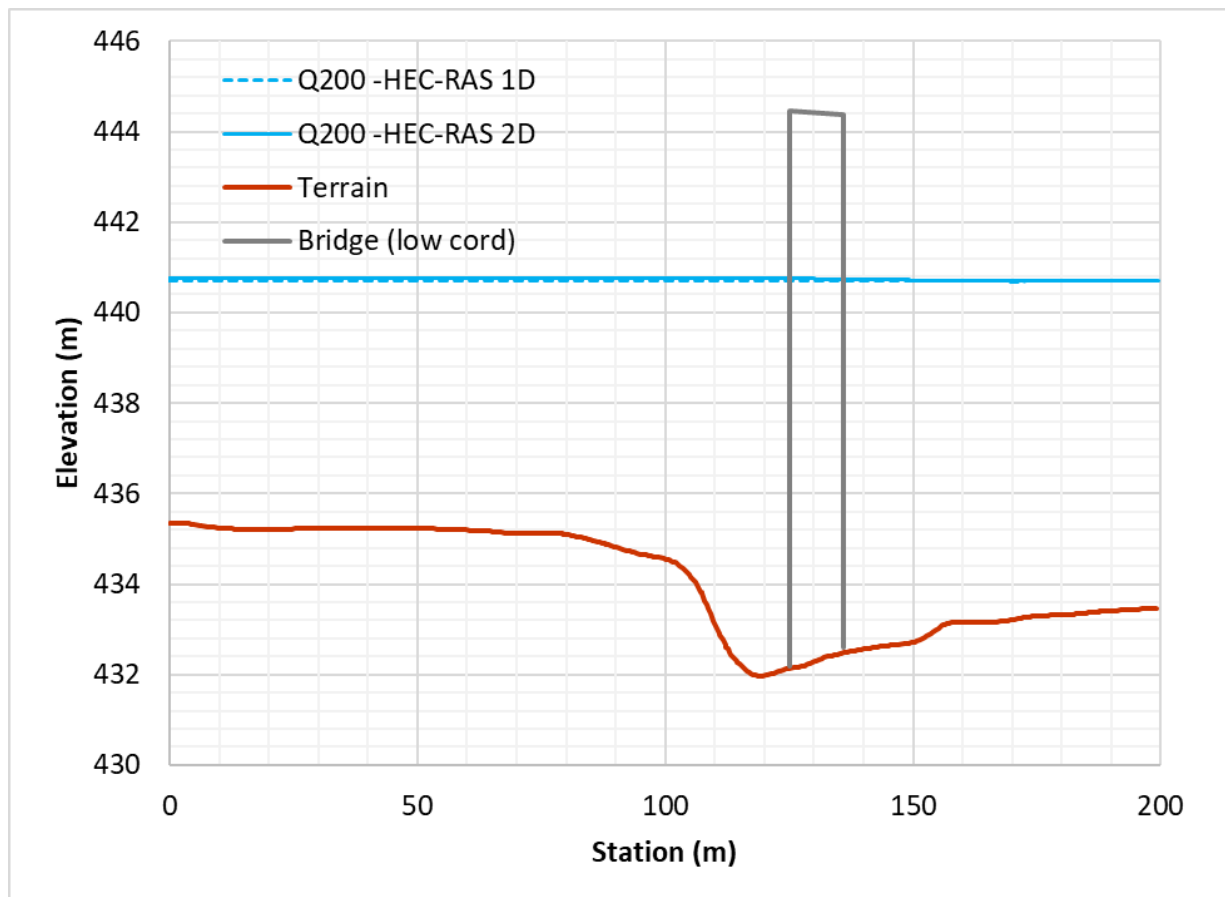


Figure E-14. Profile of the modelled 200-year discharge under the Highway 6 bridge from 2D and 1D HEC-RAS models.

E.8. MODELLING SCENARIOS

Scenarios were run for the 20-, 50-, 200- and 500-year flood events for Burton and Caribou creeks; referred to as Flood Scenarios 1 and 2. Flooding was assumed to occur concurrently on both creeks as they both have catchments of similar size and therefore potential that the interaction of the flooding may impact the resulting flood depths. The flood magnitude on the alternate creek was set to the difference of the peak discharge on the combined Burton and Caribou watersheds minus the peak discharge on the creek of interest. The results were then a merge of the two water surface elevations for each scenario based on the maximum water surface elevation or velocity.

A summary of inflows used for Flood Scenario 1 is given in Table E-4 and inflows for Flood Scenario 2 is given in Table E-5. In all cases the water level at the outlet in Lower Arrow Lake was maintained at 440.70 m. A sensitivity of the model to the water elevation in Lower Arrow Lake is examined in Section E.10.2.

Table E-4. Inflows used for Flood Scenario 1 – Burton Creek Flood Scenario.

Return Period	AEP	Inlet Caribou Creek (m ³ /s)	Inlet of Burton Creek (m ³ /s)	Inlet of Snow Creek (m ³ /s)
2	0.5	39	26	22
20	0.05	79	54	46
50	0.02	96	65	55
200	0.005	123	84	71
500	0.002	143	97	83
Catchment Area (km ²)		237	155	131

Table E-5. Inflows used for Flood Scenario 2 – Caribou Creek Flood Scenario.

Return Period	AEP	Inlet Caribou Creek (m ³ /s)	Inlet of Burton Creek (m ³ /s)	Inlet of Snow Creek (m ³ /s)
2	0.5	46	23	19
20	0.05	93	46	39
50	0.02	113	56	47
200	0.005	146	72	61
500	0.002	169	83	71
Catchment Area (km ²)		237	155	131

E.9. SIMULATION SETTINGS

The hydraulic model described above was run using the full momentum equation with a Courant controlled time step. The full momentum equations provide accurate representation of flow dynamics especially where sharp construction/expansions/changes in direction are observed. The initial time step was 10 seconds, and the maximum Courant number was set to 1.5. The minimum time step was set to 0.25 seconds.

The model could reach steady state and for each model scenario and the results were extracted. It was found that the model was able to reach steady state after three hours. Steady state was determined by examining the stage hydrograph at the Highway 6 bridge.

E.10. SENSITIVITY ANALYSIS

E.10.1. Sensitivity to Roughness

Since the models are uncalibrated, a sensitivity analysis for Manning's n was performed. For the 200-year flood event two additional scenarios were run, a high Manning's n scenario in which the main channel Manning's n value was increased by 10% (n=0.084), and a low Manning's n scenario in which the main channel Manning's n value was decreased by 10% (n=0.068).

The change in the WSE along the channel thalweg of the Caribou Creek is shown in Figure E-15 and for Burton Creek in Figure E-16. Along Caribou Creek, the +/- 10% change in the Manning's n resulted in a change of between 5 cm to 16 cm along the main channel upstream of the entrance to the bay. Burton Creek was less sensitive as the +/- 10% change in the Manning's n resulted in a difference between 1cm to 10 cm along the main channel upstream of the bay. The water surface profile is not sensitive to the roughness once the channel reaches the bay (approximately at station 4850 m and Burton Creek and 4150 m for Caribou Creek).

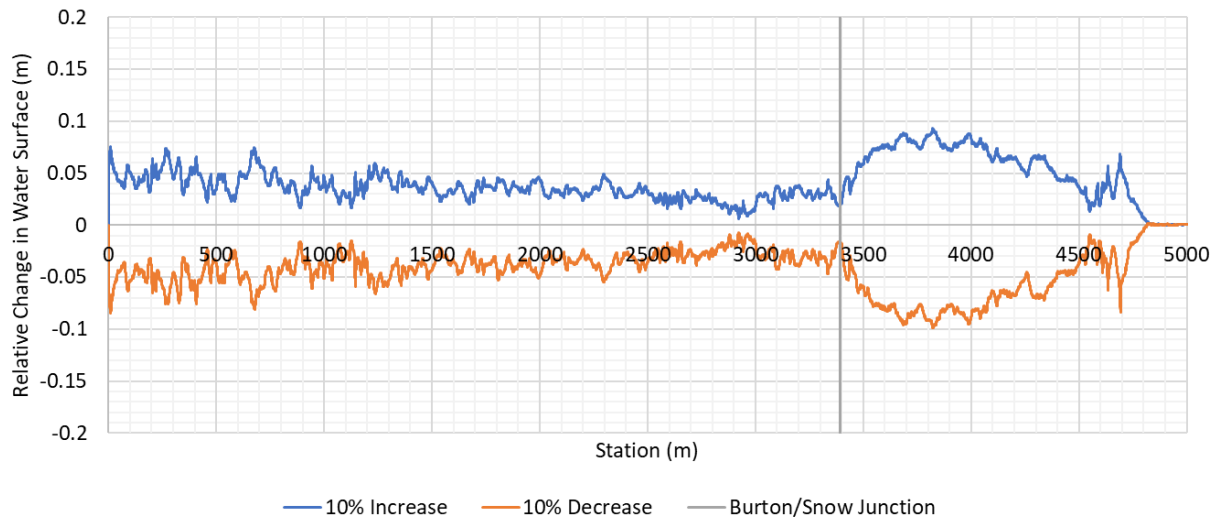


Figure E-15. Change in water surface elevation (WSE) along the channel thalweg of Burton Creek. The location of the junction with Snow Creek is provided for reference.

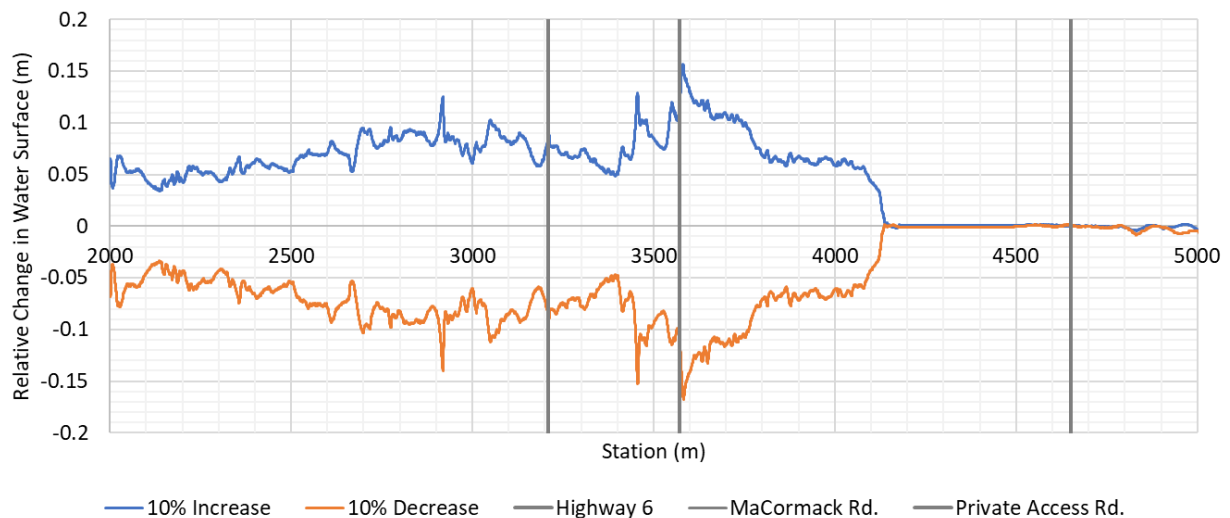


Figure E-16. Change in water surface elevation (WSE) along the channel thalweg of Caribou Creek. The location of the three bridges is provided for reference.

The effect of Manning’s n on flood inundation extent is shown in Figure E-18 and Figure E-17. The sensitivity to the change in the roughness in the channel is greatest along the sections where the flow is confined within the channel and less sensitive within the sections with anabranching. A summary of changes to WSE at key locations is provided in Table E-4.

Table E-6. Summary of changes to water surface elevation (WSE) at key locations.

Location Description	Easting NAD 83 Zone 11	Northing NAD 83 Zone 11	Average WSE (m) n=0.068	Average WSE (m) n=0.076	Average WSE (m) n=0.084
Upstream Extent of Bathymetric Survey – Caribou Creek	438,377.2	5,536,979.9	469.08	469.12	469.16
Private Access Road Bridge	437,528.0	5,536,949.7	453.50	453.57	453.64
McCormack Road Bridge	437,240.9	5,536,793.6	447.68	447.78	447.90
Upstream Extent of Bathymetric Survey – Burton Creek	436,180.7	5,535,374.5	457.30	457.34	457.38
Upstream Extent of Bathymetric Survey – Snow Creek	436,705.8	5,535,379.6	463.89	463.94	463.99
Junction of Burton and Caribou Creeks (Estuary)	436,300.1	5,536,899.8	440.76	440.76	440.76
Highway 6 Bridge	436,254.3	5,536,941.8	440.71	440.71	440.71

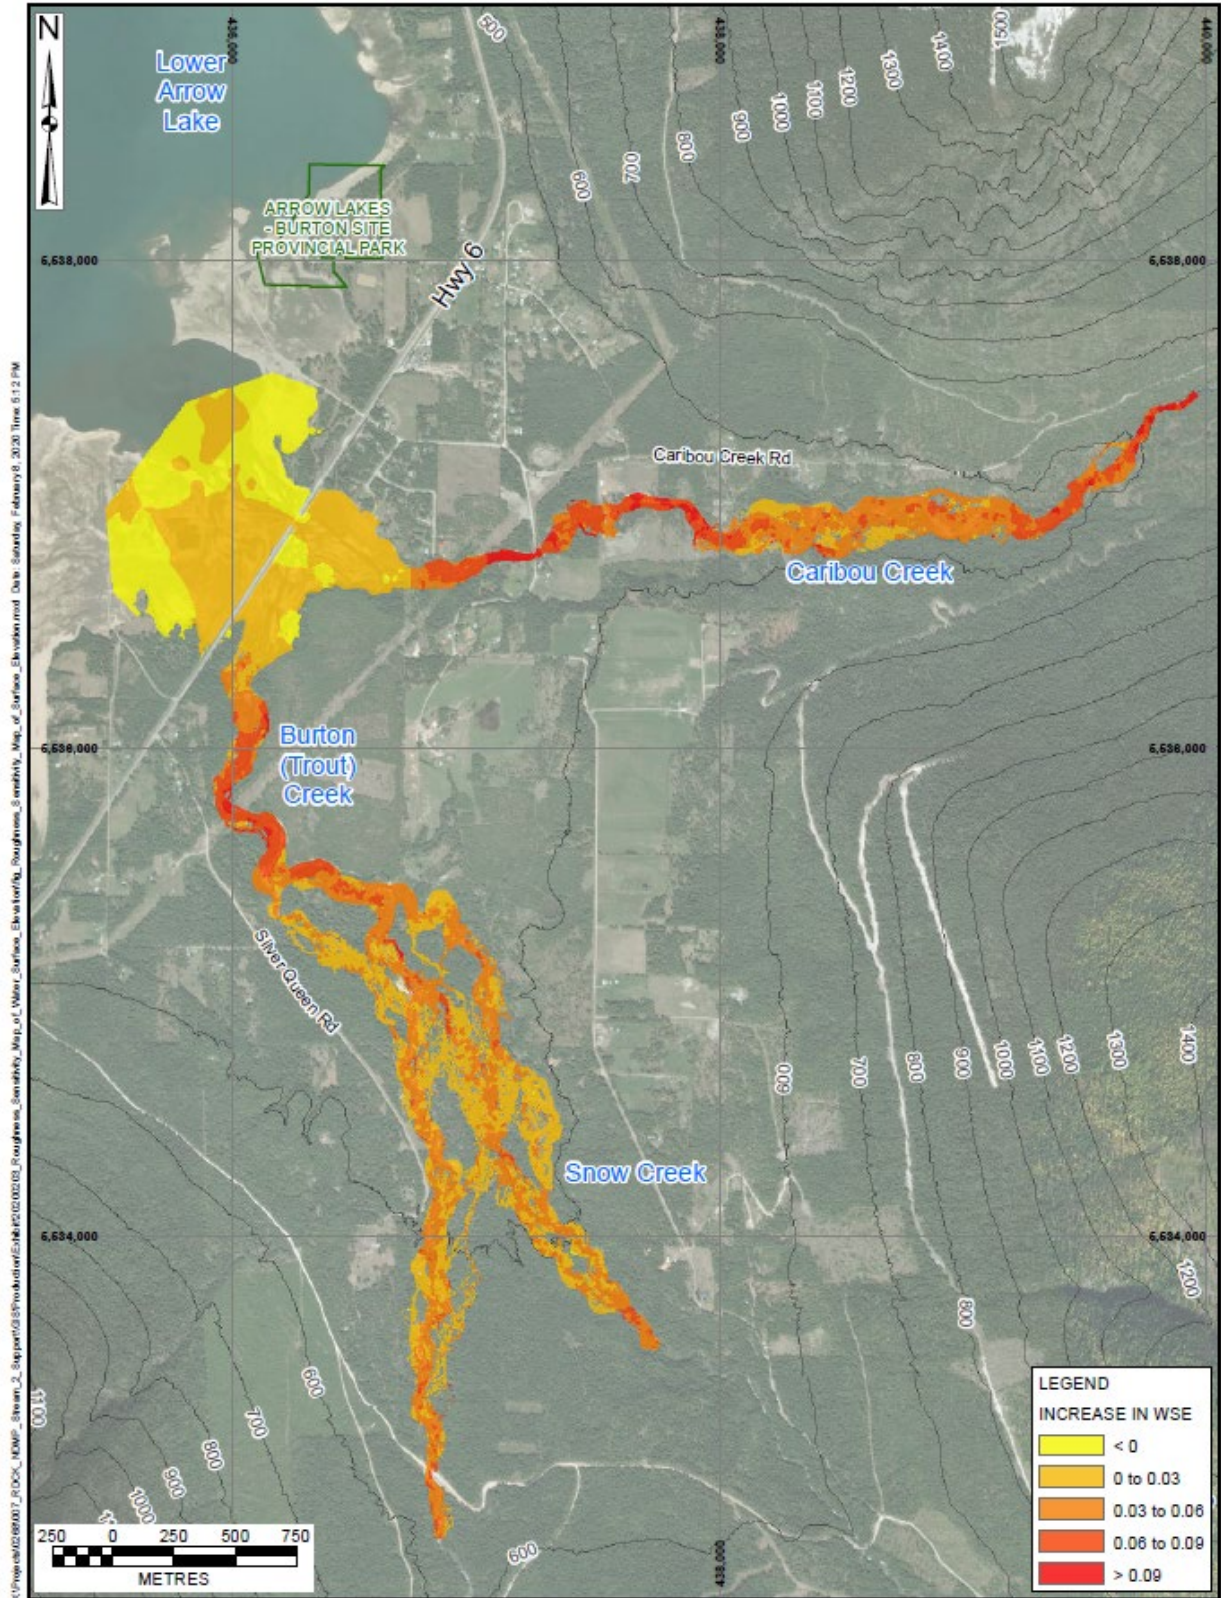


Figure E-17. Change in WSE for 10% increase in Manning's n.

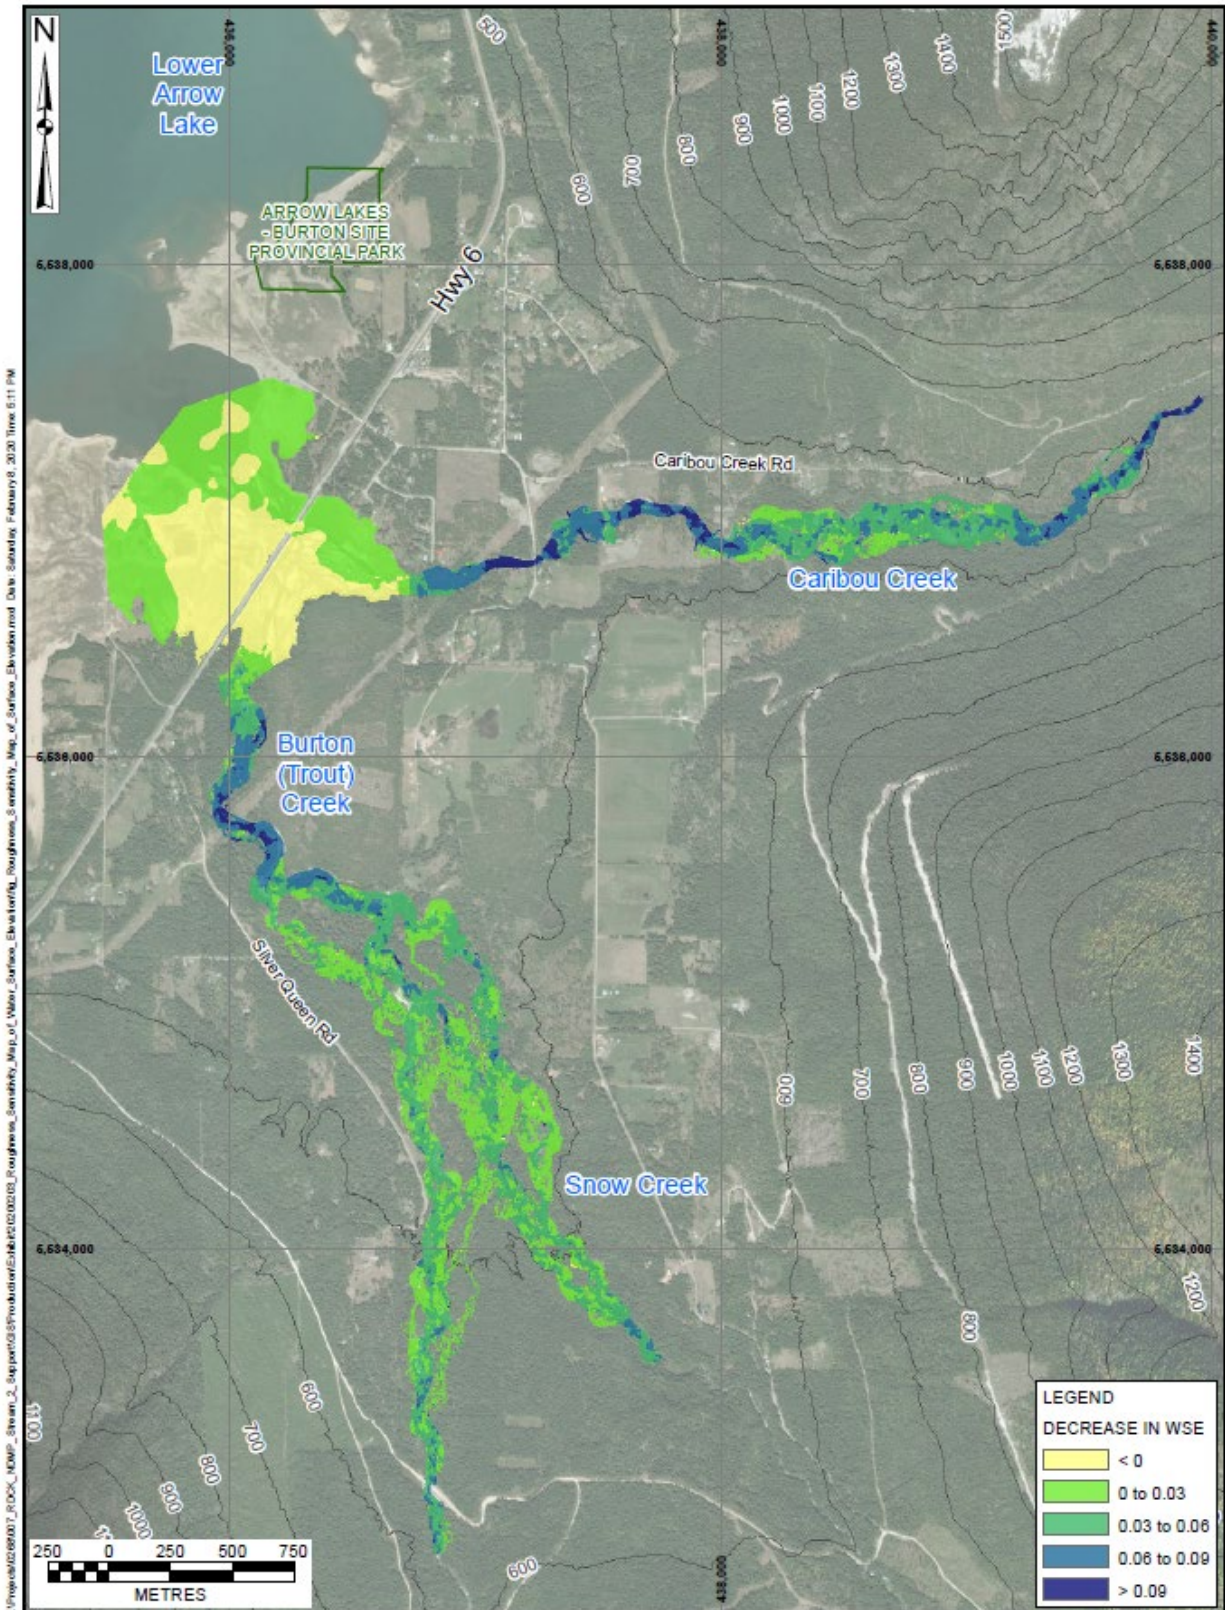


Figure E-18. Change in WSE for 10% decrease in Manning's n.

E.10.2. Sensitivity to Lower Arrow Lake Water Elevation

The sensitivity of the model to the water elevation in Lower Arrow Lake was examined by re-running the 200-year flood scenario on Caribou Creek with the lake level set to 440.10 m and comparing the resulting water surfaces on Burton and Caribou Creek. The water surface profiles are shown in Figure E-19 and Figure E-20. The water profiles show that only the water surface within the bay is affected by the water levels in Lower Arrow Lake. There minimal backwater effect from the lake on the creeks.

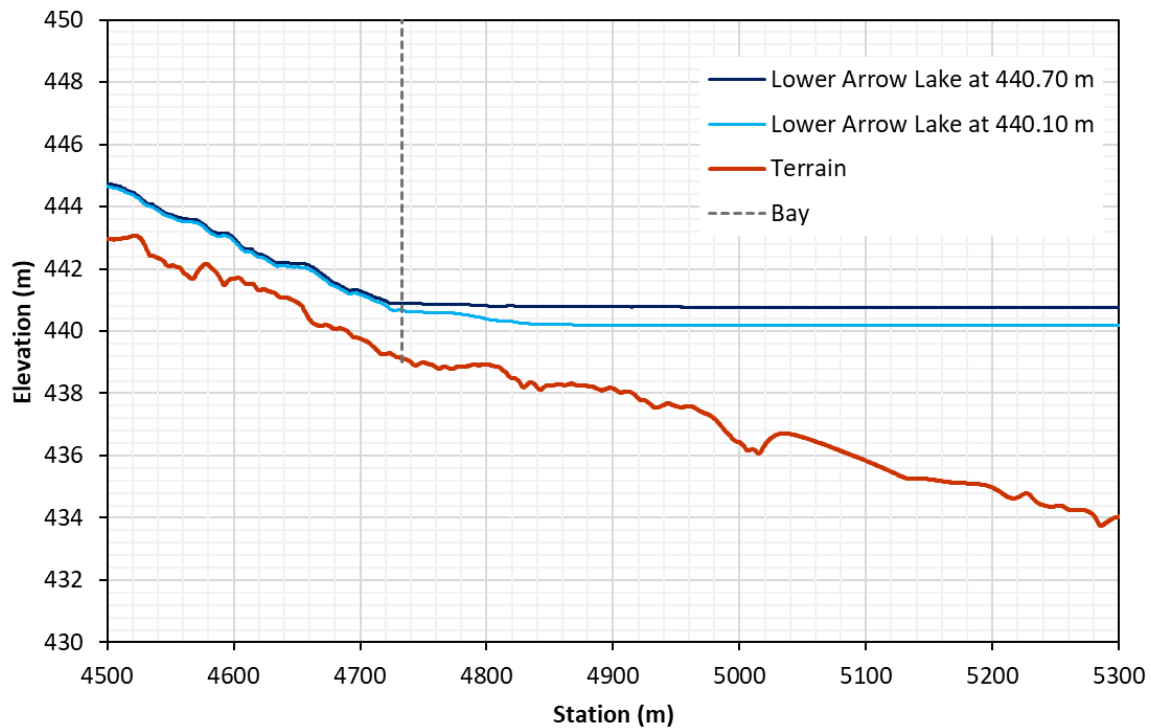


Figure E-19. Water surface elevations for Burton Creek for different water levels in Lower Arrow Lake. The transition from the creek to the bay is noted by the dashed line.

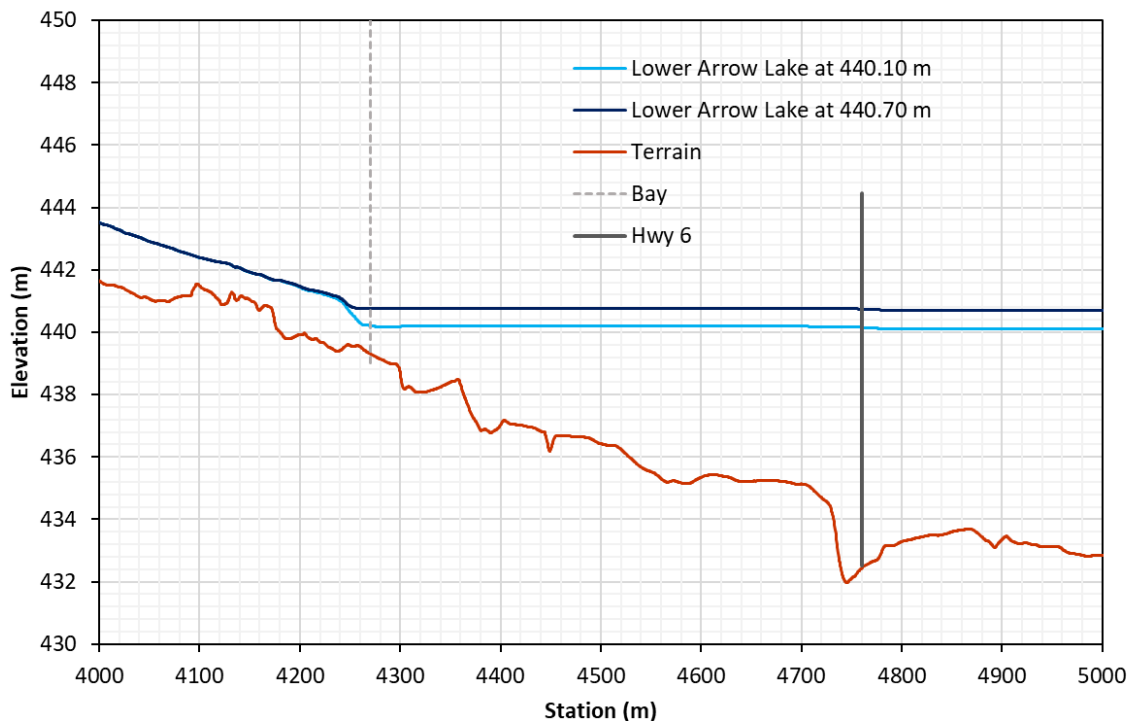


Figure E-20. Water surface elevations for Caribou Creek for different water levels in Lower Arrow Lake. The transition from the creek to the bay is noted by the dashed line.

E.11. MODEL LIMITATIONS

There is uncertainty associated with the output the hydraulics models that the reader should be aware of when reading this report or using its results. This comes from the limitations and assumptions inherent in development of the DEM and in the hydraulic modelling process.

- There was a two-year gap between the acquisition of the Lidar data and the bathymetric survey data. As the channels are highly active there was often an offset between the two data sets.
- The LIDAR was flown during relatively high-water levels on Lower Arrow Lake versus the water levels when the bathymetric survey was performed. This impacted the amount of surveying completed with the bay upstream of Highway 6 along the Burton fan and flats. Professional judgement was applied to interpolate between the two datasets over areas where no data had been collected.
- As orthophotos were not collected with the LIDAR was acquired, the bare-earth DEM model contains some inaccuracies particularly along the channels where some vegetated bars were not correctly classified and along the shoreline.
- Culverts and small-scale drainage features such as ditches were not included into the model.
- The extensive anabranching present in both Burton and Caribou Creeks is difficult to capture within any hydraulic model. Additionally, these locations are within heavily forested sections meaning that the LiDAR penetration and resulting terrain resolution is

low compared to other areas of the model. Therefore, caution must be applied in interpreting the results in these areas.


- The models were not calibrated. A sensitivity analysis was performed to help elucidate the overall change in the model results due to the roughness.
- The models did not consider sediment transport or changes to channel geometry. They assumed a fixed channel morphology despite evidence of changes within the past several years for most channels examined.

Although, as noted, there are several limitations with the modelling process described above the results are nevertheless considered to be sufficiently accurate to generate up-to-date flood mapping that represents an improvement relative to that which presently exists.

REFERENCES

- Brunner, G. W., & CEIWR-HEC. (2016). HEC-RAS River Analysis System 2D Modeling User's Manual. Retrieved from www.hec.usace.army.mil
- Chow, V.T. (1959). Open-channel hydraulics: New York, McGraw-Hill, 680 p.
- Eaton, B.C., Millar, R.G., & Davidson, S. (2010). Channel patterns: Braided, anabranching, and single-thread. *Geomorphology*, 120(3-4), 353-364.
- Jarrett, R.D. (1984). Hydraulics of high-gradient streams: American Society of Civil Engineers, *Journal of Hydraulic Engineering*, v. 110, no. HY11, p. 1519-1539.
- Natural Resources Canada (NRCAN). (2019, November 28). 2015 land cover of Canada – Landsat-8 [Data]. Resolution 30-metre. Retrieved from <https://www.nrcan.gc.ca/science-and-data/science-and-research/earth-sciences/geography/topographic-information/whats-new/2015-land-cover-canada-landsat-8-30-metre-resolution-now-available/22427>

DRAWINGS

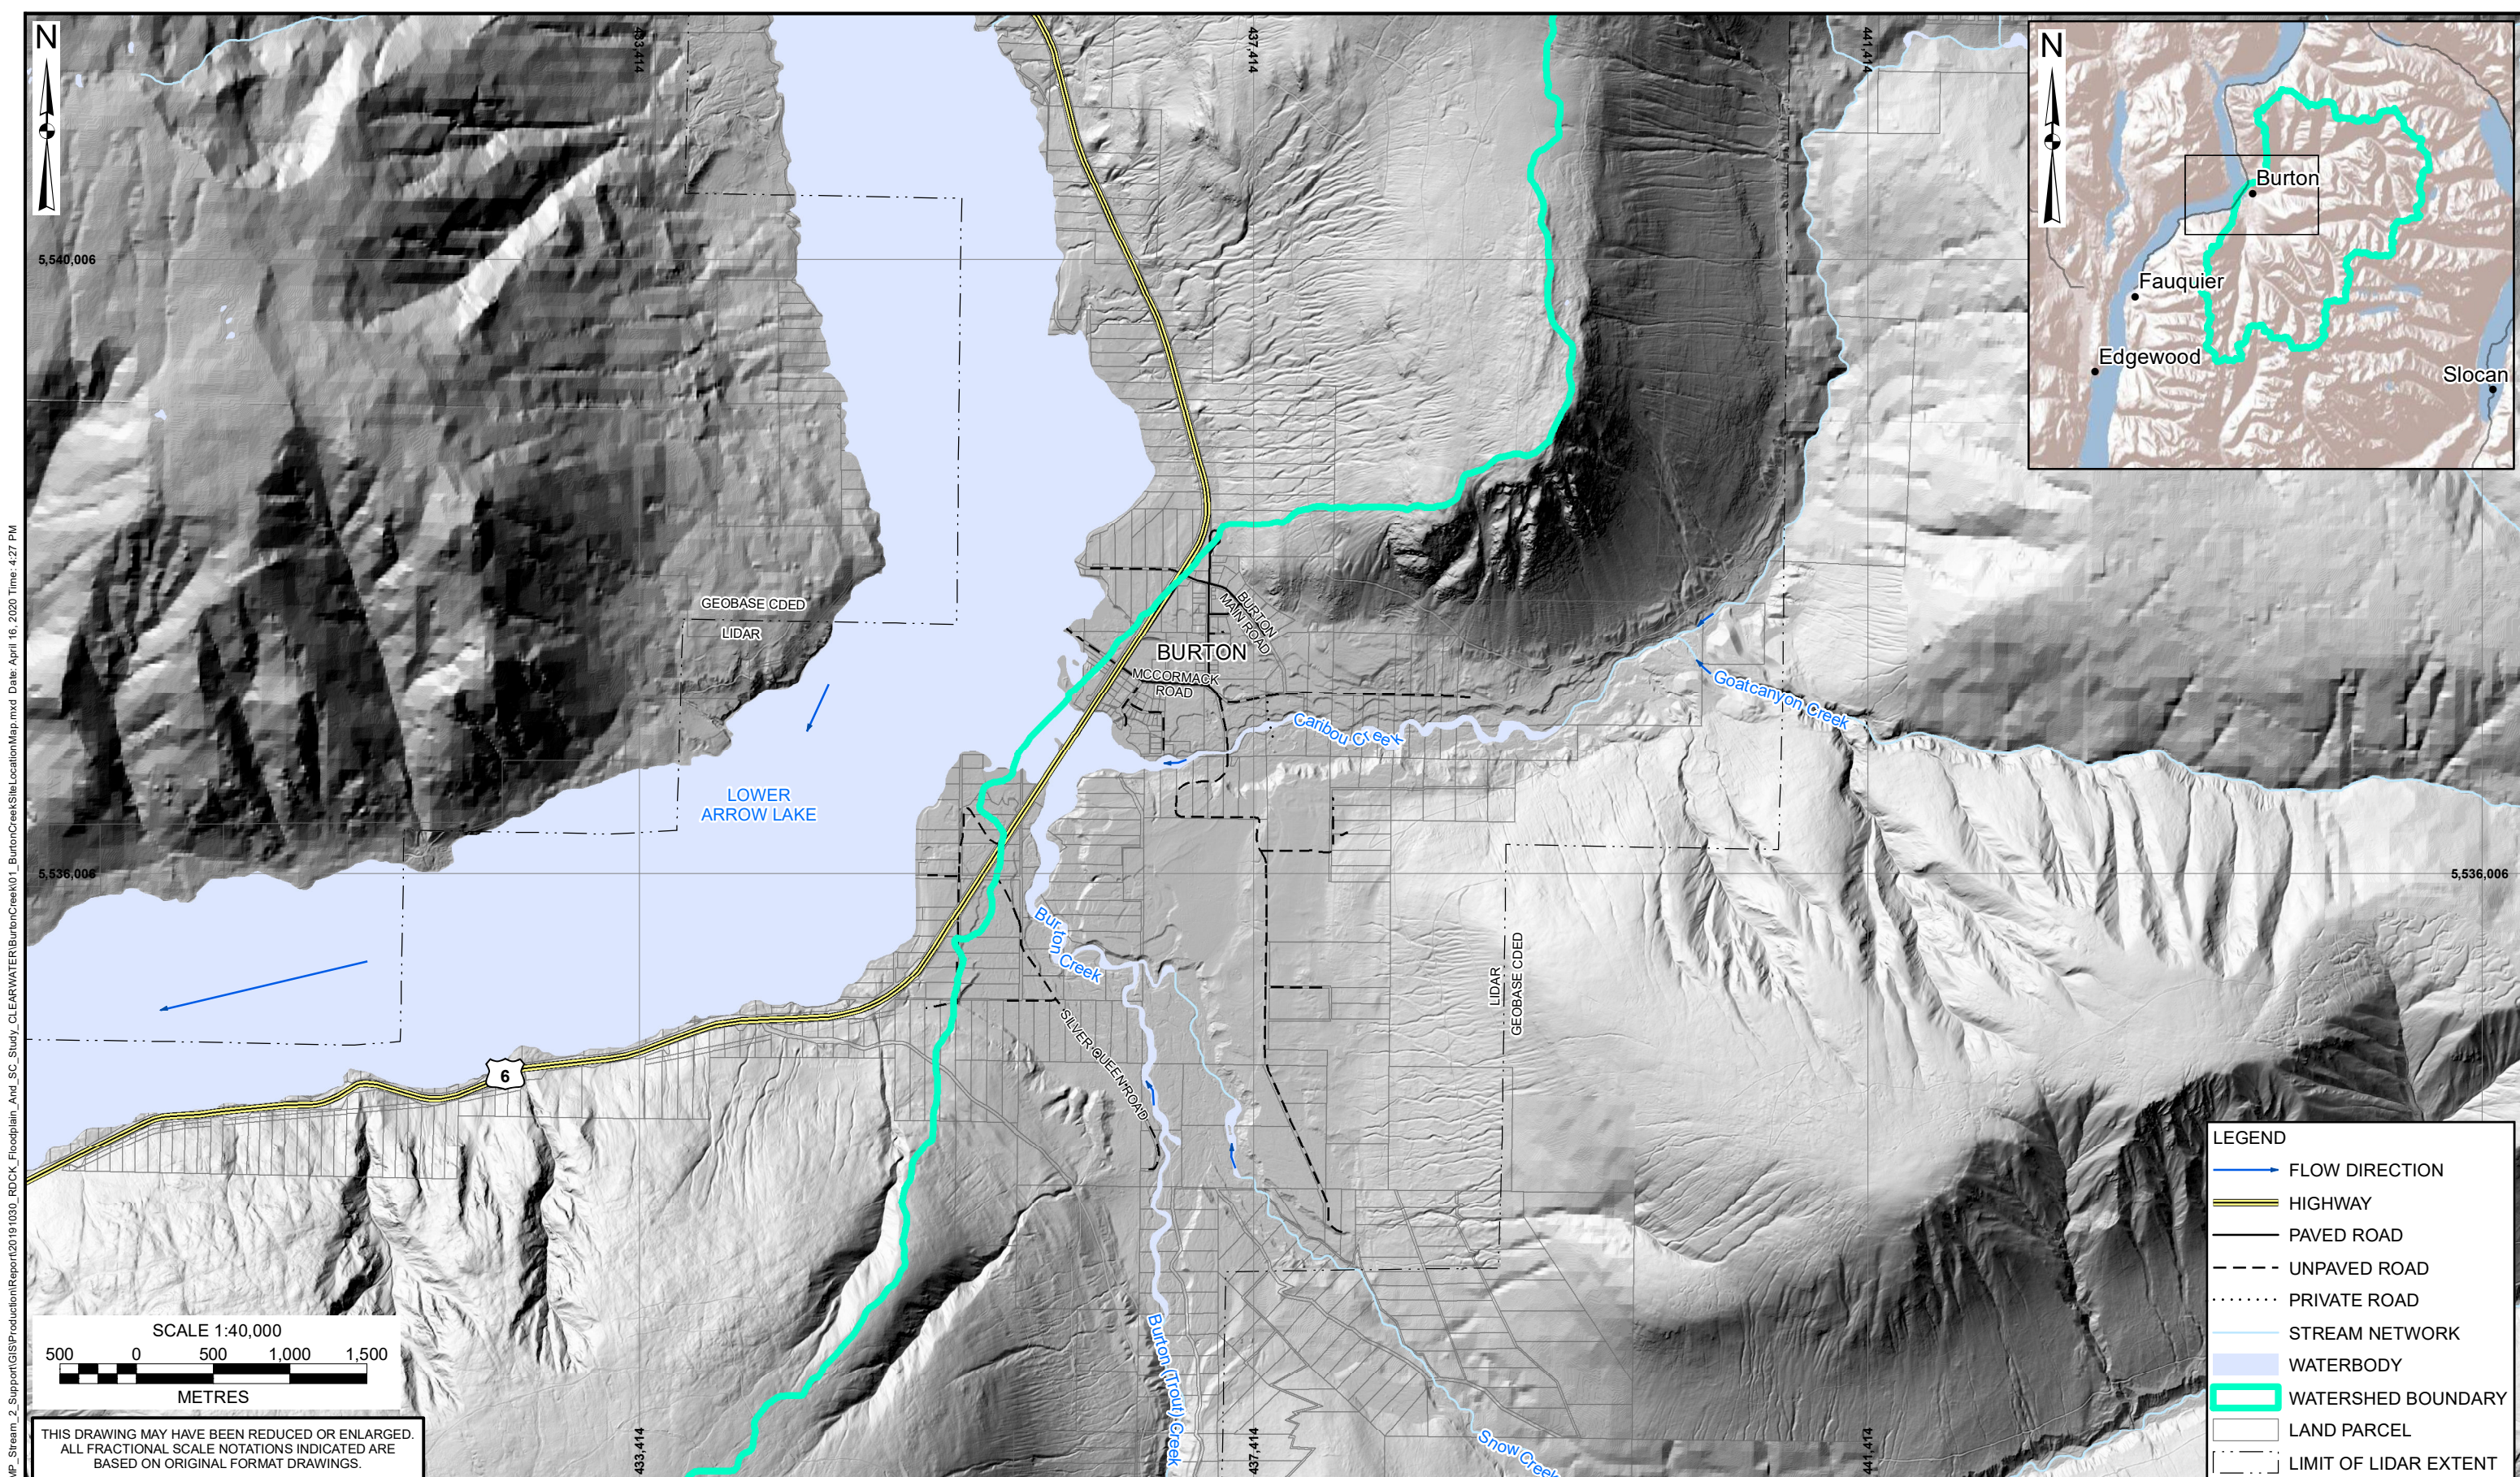

X:\Projects\0268\007_RDCK_NDMP_Stream_2_Support\GIS\Production\Report\2019\030_RDCK_CLEARWATER\BurtonCreek\01_BurtonCreek\SiteLocationMap.mxd Date: April 16, 2020 Time: 4:27 PM

NOTES:
 1. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE NOTED.
 2. THIS DRAWING MUST BE READ IN CONJUNCTION WITH BGC'S REPORT TITLED "RDCK FLOODPLAIN AND STEEP CREEK STUDY - BURTON CREEK", AND DATED MARCH 2020.
 3. BASE TOPOGRAPHIC DATA BASED ON LIDAR PROVIDED BY REGIONAL DISTRICT OF CENTRAL KOOTENAY, DATED 2018.
 4. BASE IMAGERY PROVIDED BY ESRI GLOBAL IMAGERY SERVICE.
 5. COORDINATE SYSTEM IS NAD 1983 UTM Zone 11N. VERTICAL DATUM IS UNKNOWN.
 6. UNLESS BGC AGREES OTHERWISE IN WRITING, THIS DRAWING SHALL NOT BE MODIFIED OR USED FOR ANY PURPOSE OTHER THAN THE PURPOSE FOR WHICH BGC GENERATED IT. BGC SHALL HAVE NO LIABILITY FOR ANY DAMAGES OR LOSS ARISING IN ANY WAY FROM ANY USE OR MODIFICATION OF THIS DOCUMENT NOT AUTHORIZED BY BGC. ANY USE OF OR RELIANCE UPON THIS DOCUMENT OR ITS CONTENT BY THIRD PARTIES SHALL BE AT SUCH THIRD PARTIES' SOLE RISK.



SCALE: 1:40,000
 DATE: MAR 2020
 DRAWN: MW
 CHECKED: ES
 APPROVED: RM

BGC ENGINEERING INC.
 AN APPLIED EARTH SCIENCES COMPANY

CLIENT: 

PROJECT: RDCK FLOODPLAIN AND STEEP CREEK STUDY - BURTON CREEK
 TITLE: SITE LOCATION MAP
 PROJECT No.: 0268-007
 DWG No.: 01

X:\Projects\0268\007_RDCK_NDMP_Stream_2_Support\GIS\Production\Report\20191030_RDCK_Floodplain_And_SC_Study_ClearwaterBurtonCreek\FINAL\COPIES\02_BurtonCreek\WatershedMap2.mxd Date: April 16, 2020 Time: 4:11 PM

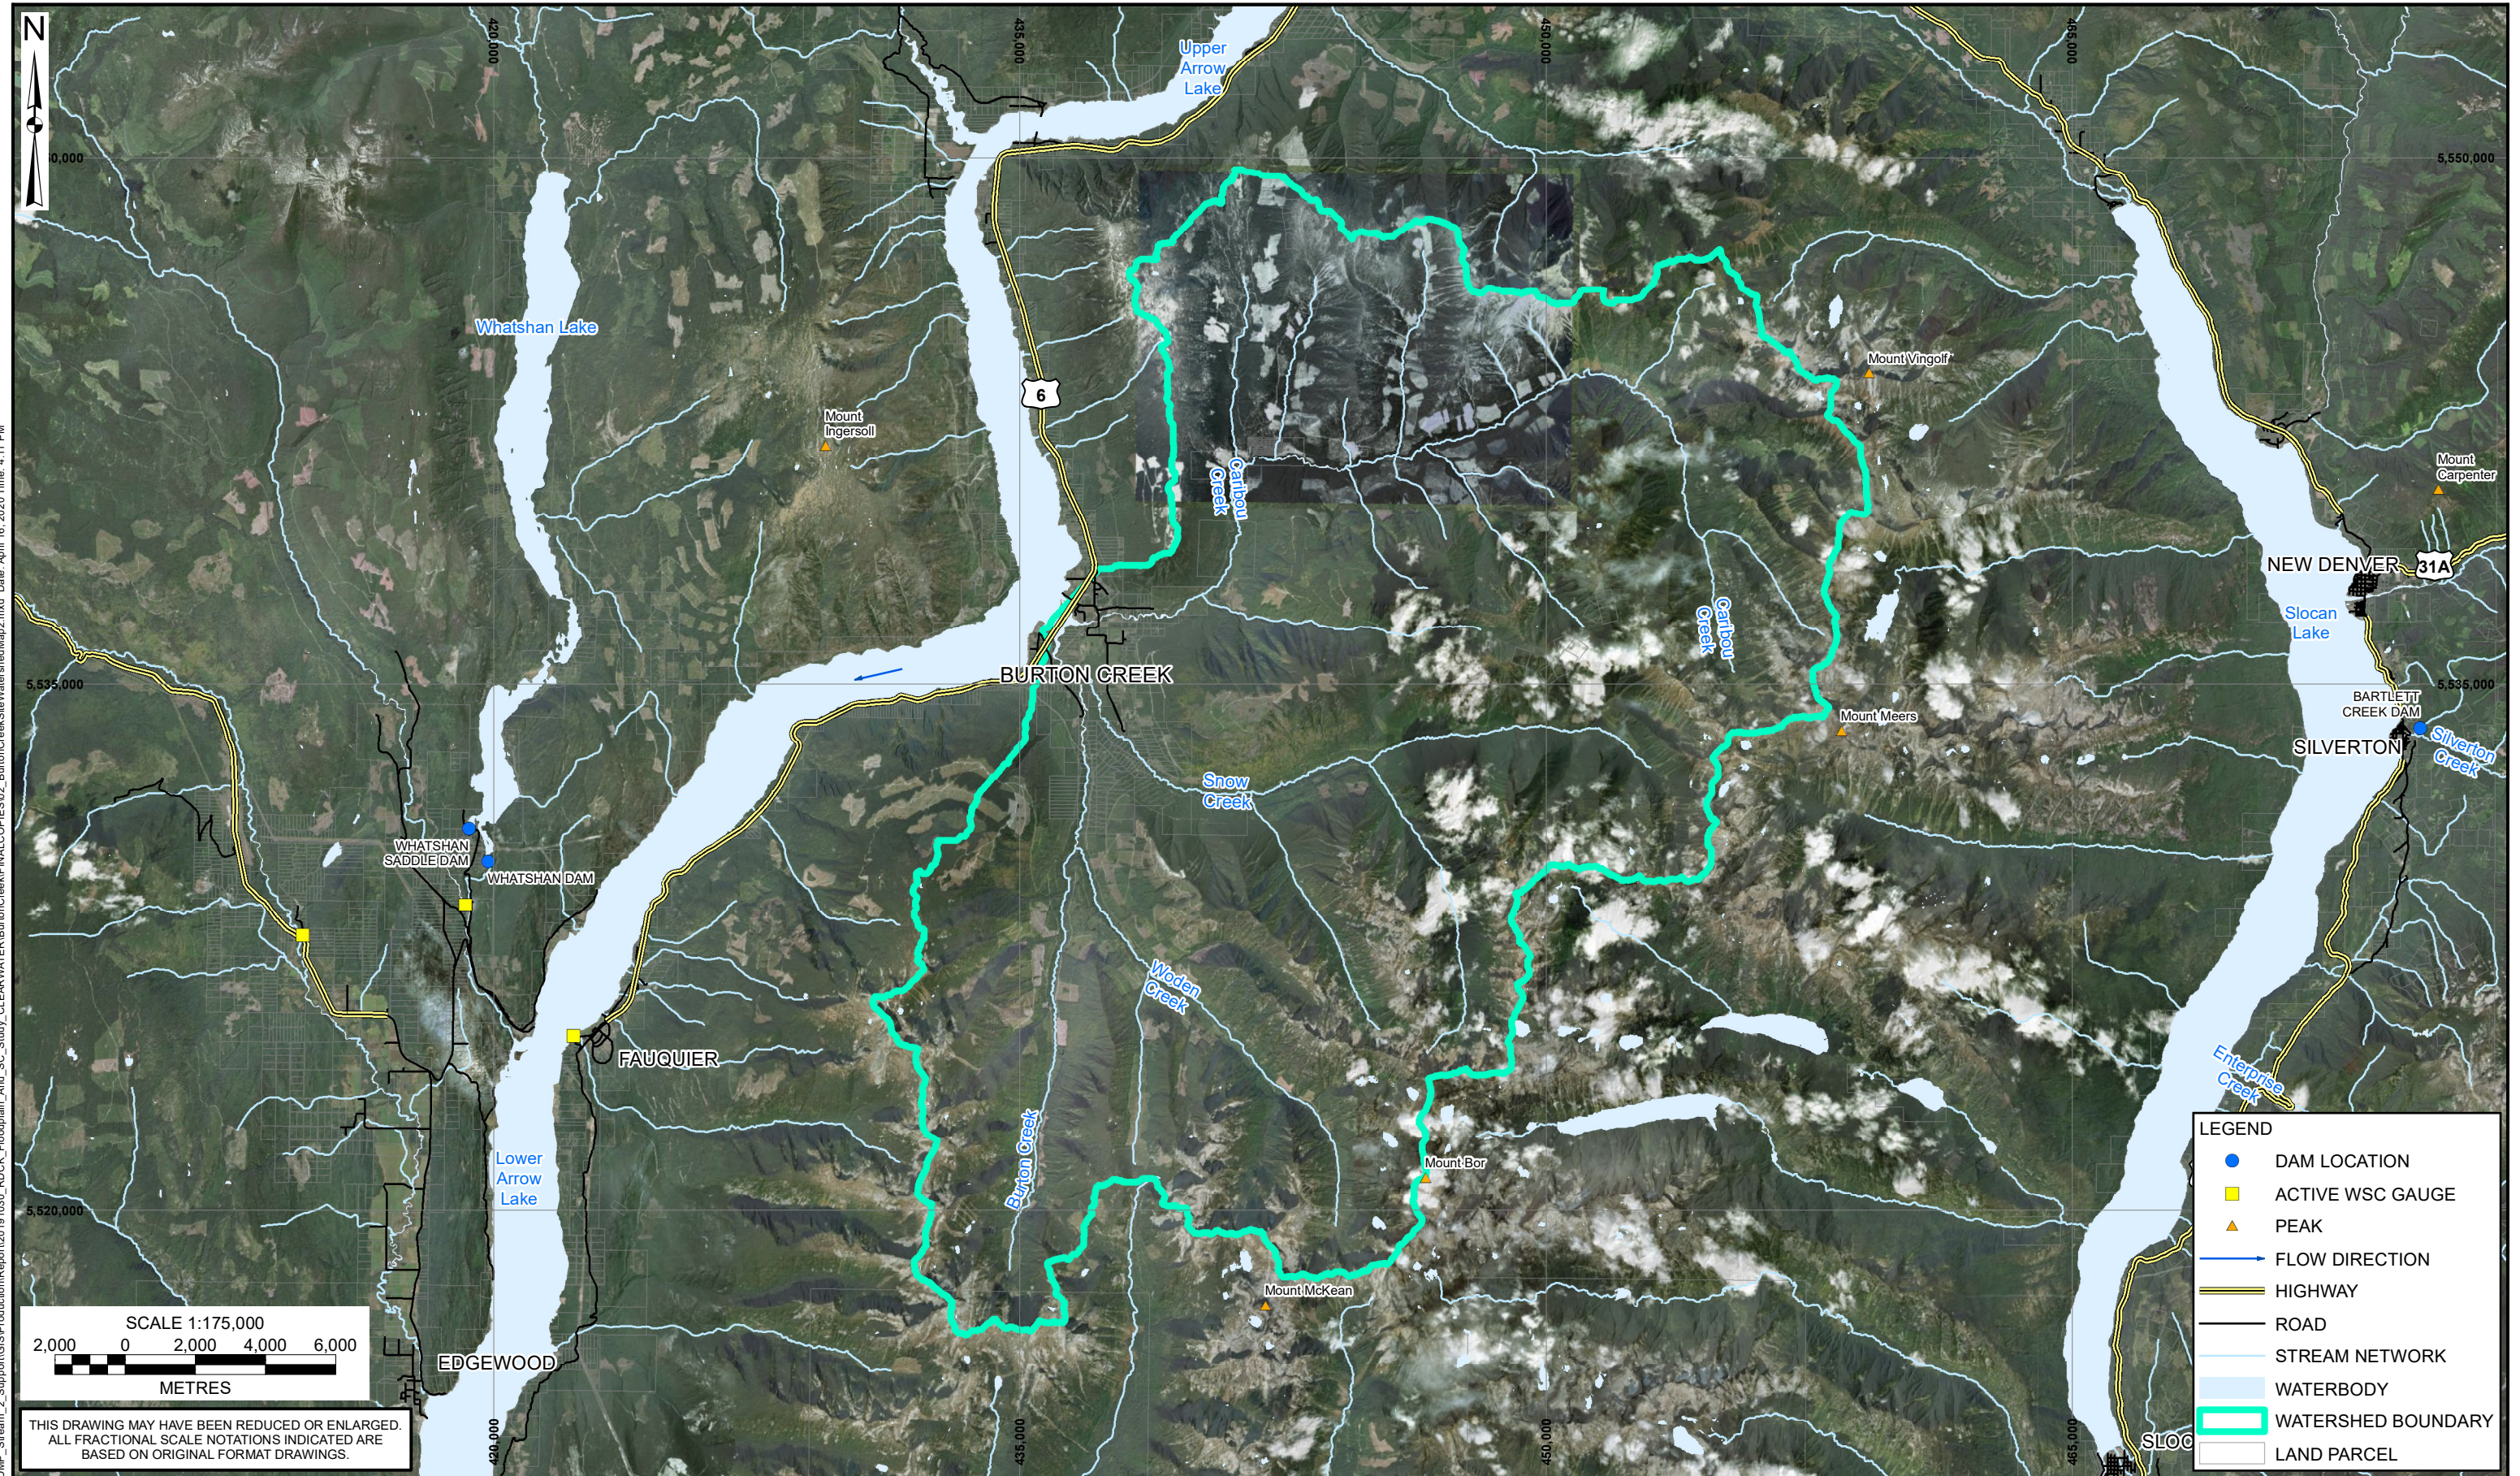

THIS DRAWING MAY HAVE BEEN REDUCED OR ENLARGED.
ALL FRACTIONAL SCALE NOTATIONS INDICATED ARE
BASED ON ORIGINAL FORMAT DRAWINGS.

NOTES:
 1. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE NOTED.
 2. THIS DRAWING MUST BE READ IN CONJUNCTION WITH BGC'S REPORT TITLED "RDCK FLOODPLAIN AND STEEP CREEK STUDY - BURTON CREEK", AND DATED MARCH 2020.
 3. BASE IMAGERY PROVIDED BY ESRI GLOBAL IMAGERY SERVICE.
 4. COORDINATE SYSTEM IS NAD 1983 UTM Zone 11N. VERTICAL DATUM IS UNKNOWN.
 5. UNLESS BGC AGREES OTHERWISE IN WRITING, THIS DRAWING SHALL NOT BE MODIFIED OR USED FOR ANY PURPOSE OTHER THAN THE PURPOSE FOR WHICH BGC GENERATED IT. BGC SHALL HAVE NO LIABILITY FOR ANY DAMAGES OR LOSS ARISING IN ANY WAY FROM ANY USE OR MODIFICATION OF THIS DOCUMENT NOT AUTHORIZED BY BGC. ANY USE OF OR RELIANCE UPON THIS DOCUMENT OR ITS CONTENT BY THIRD PARTIES SHALL BE AT SUCH THIRD PARTIES' SOLE RISK.



SCALE:	1:175,000
DATE:	MAR 2020
DRAWN:	MW
CHECKED:	ES
APPROVED:	RM

BGC ENGINEERING INC.
AN APPLIED EARTH SCIENCES COMPANY

CLIENT:

PROJECT: RDCK FLOODPLAIN AND STEEP CREEK STUDY BURTON CREEK	
TITLE: WATERSHED OVERVIEW MAP	
PROJECT No.:	DWG No.:
0268-007	02

X:\Projects\0268\007_RDCK_NDMP_Stream_2_Support\GIS\Production\Report\2019\1030_RDCK_Floodplain_And_SC_Study_CLEARWATER\BurtonCreek\SurveyLocations.mxd Date: April 16, 2020 Time: 4:20 PM

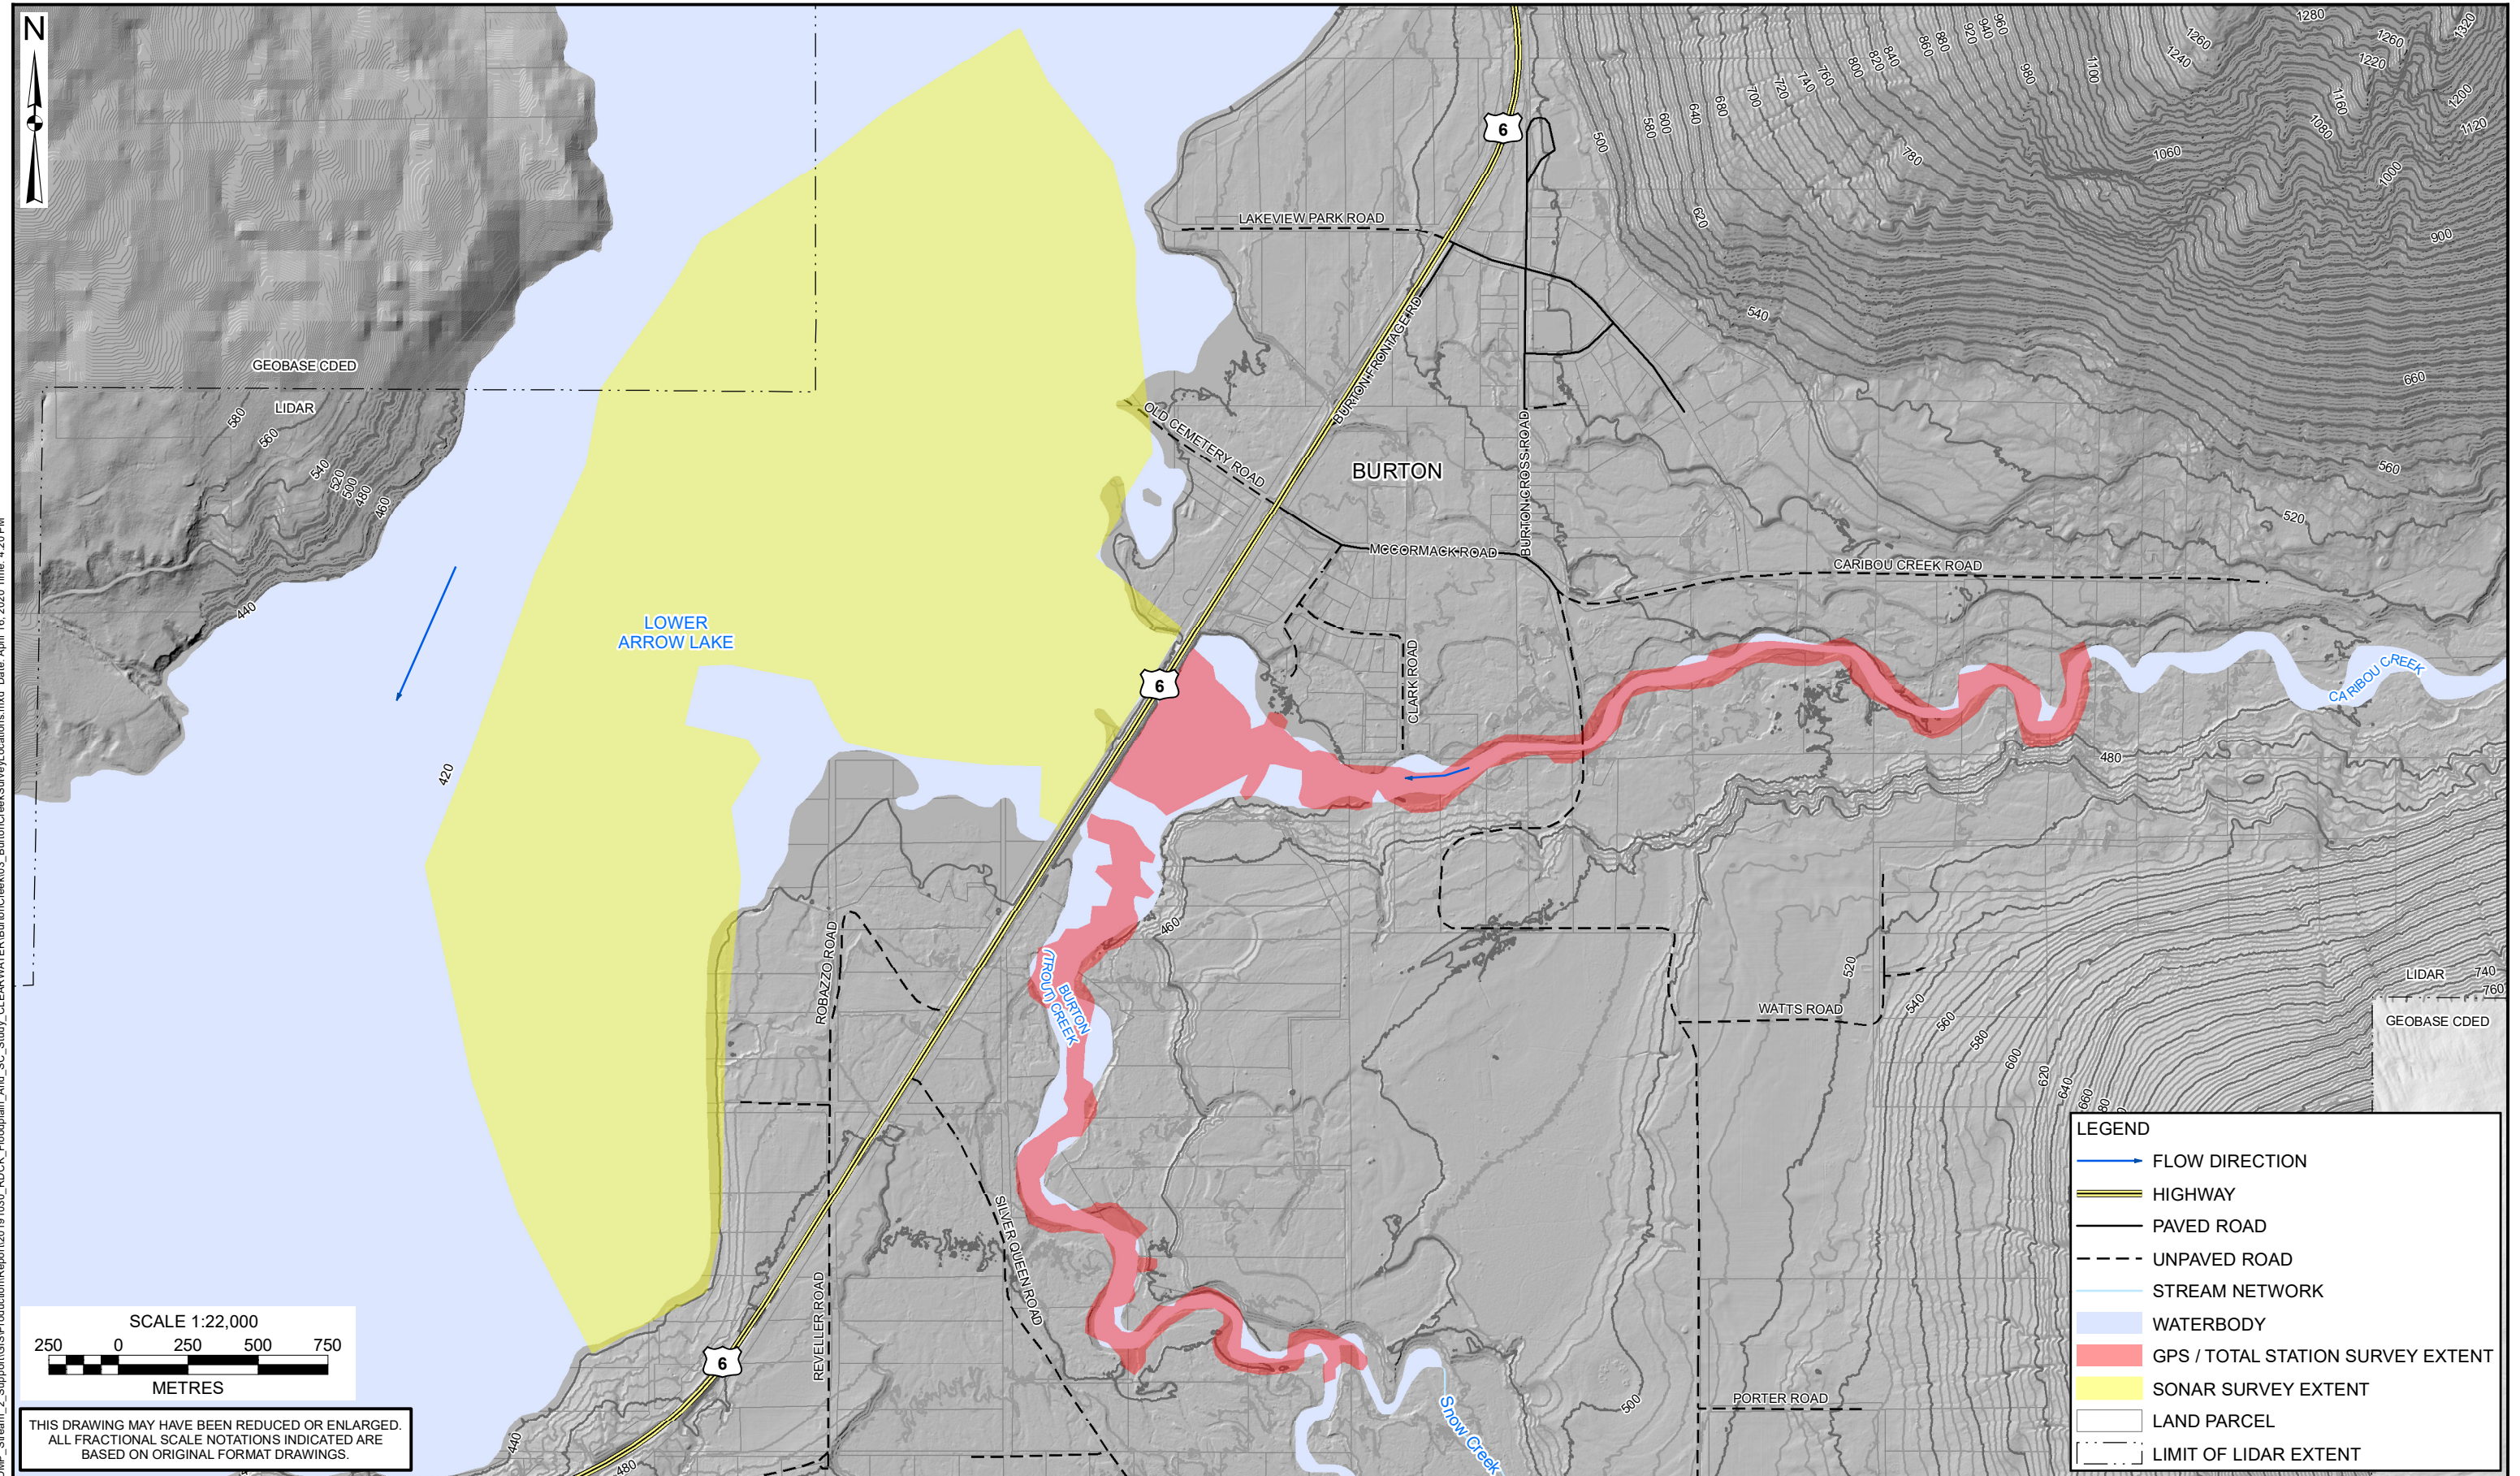

THIS DRAWING MAY HAVE BEEN REDUCED OR ENLARGED.
ALL FRACTIONAL SCALE NOTATIONS INDICATED ARE
BASED ON ORIGINAL FORMAT DRAWINGS.

LEGEND	
	FLOW DIRECTION
	HIGHWAY
	PAVED ROAD
	UNPAVED ROAD
	STREAM NETWORK
	WATERBODY
	GPS / TOTAL STATION SURVEY EXTENT
	SONAR SURVEY EXTENT
	LAND PARCEL
	LIMIT OF LIDAR EXTENT




NOTES:
 1. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE NOTED.
 2. THIS DRAWING MUST BE READ IN CONJUNCTION WITH BGC'S REPORT TITLED "RDCK FLOODPLAIN AND STEEP CREEK STUDY -BURTON CREEK", AND DATED MARCH 2020.
 3. BASE TOPOGRAPHIC DATA BASED ON LIDAR PROVIDED BY REGIONAL DISTRICT OF CENTRAL KOOTENAY, DATED 2018.
 4. BASE IMAGERY PROVIDED BY ESRI GLOBAL IMAGERY SERVICE.
 5. COORDINATE SYSTEM IS WGS 1984 WEB MERCATOR AUXILIARY SPHERE. VERTICAL DATUM IS UNKNOWN.
 6. UNLESS BGC AGREES OTHERWISE IN WRITING, THIS DRAWING SHALL NOT BE MODIFIED OR USED FOR ANY PURPOSE OTHER THAN THE PURPOSE FOR WHICH BGC GENERATED IT.
 BGC SHALL HAVE NO LIABILITY FOR ANY DAMAGES OR LOSS ARISING IN ANY WAY FROM ANY USE OR MODIFICATION OF THIS DOCUMENT NOT AUTHORIZED BY BGC.
 ANY USE OF OR RELIANCE UPON THIS DOCUMENT OR ITS CONTENT BY THIRD PARTIES SHALL BE AT SUCH THIRD PARTIES' SOLE RISK.

SCALE:	1:22,000
DATE:	MAR 2020
DRAWN:	MW
CHECKED:	ES
APPROVED:	RM



BGC ENGINEERING INC.
 AN APPLIED EARTH SCIENCES COMPANY

CLIENT:

PROJECT: RDCK FLOODPLAIN AND STEEP CREEK STUDY -BURTON CREEK	
TITLE: SURVEY LOCATIONS	
PROJECT No.:	DWG No.:
0268-007	03

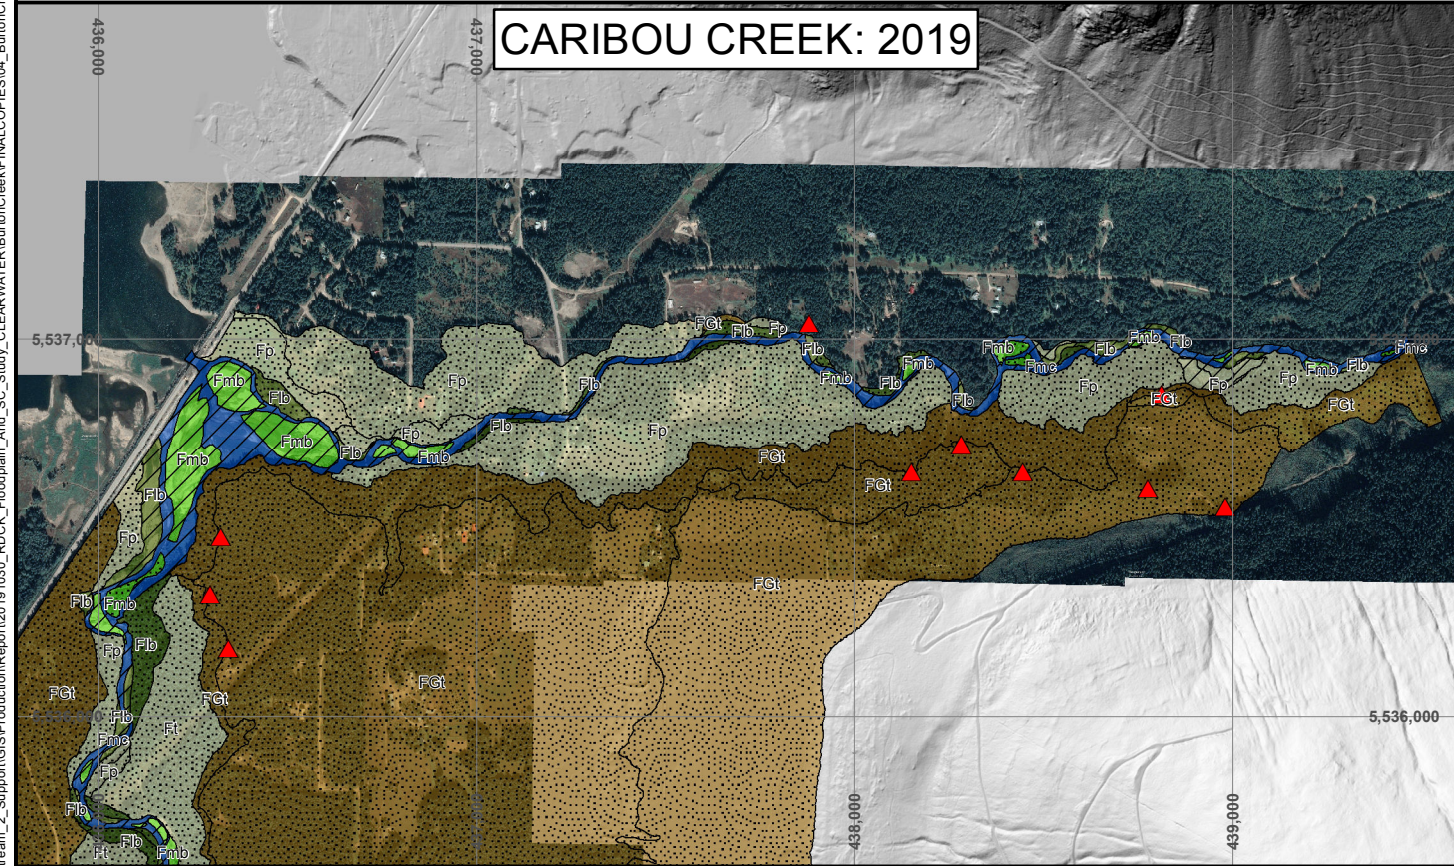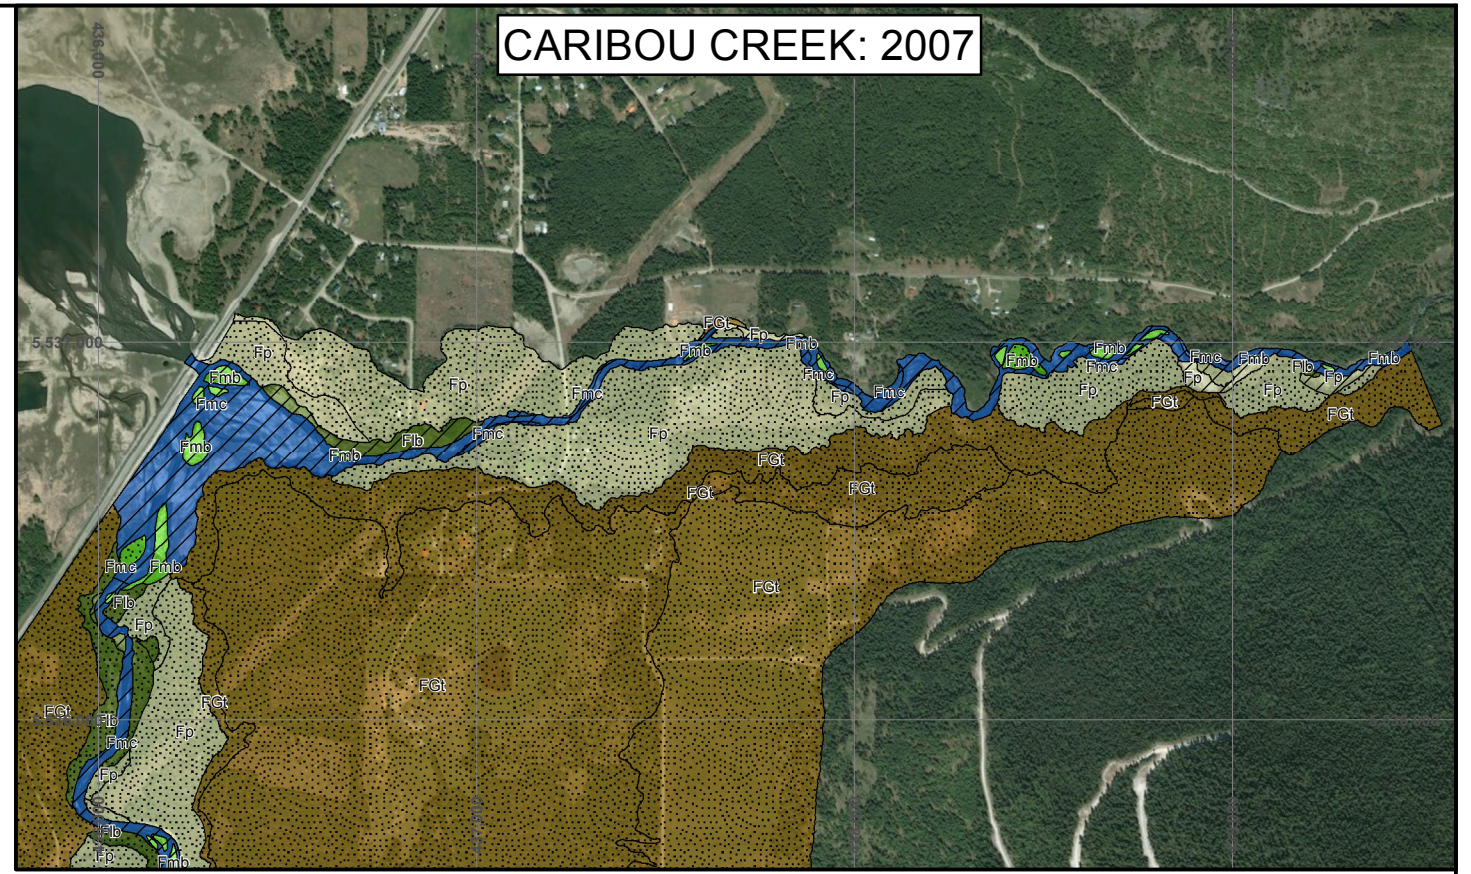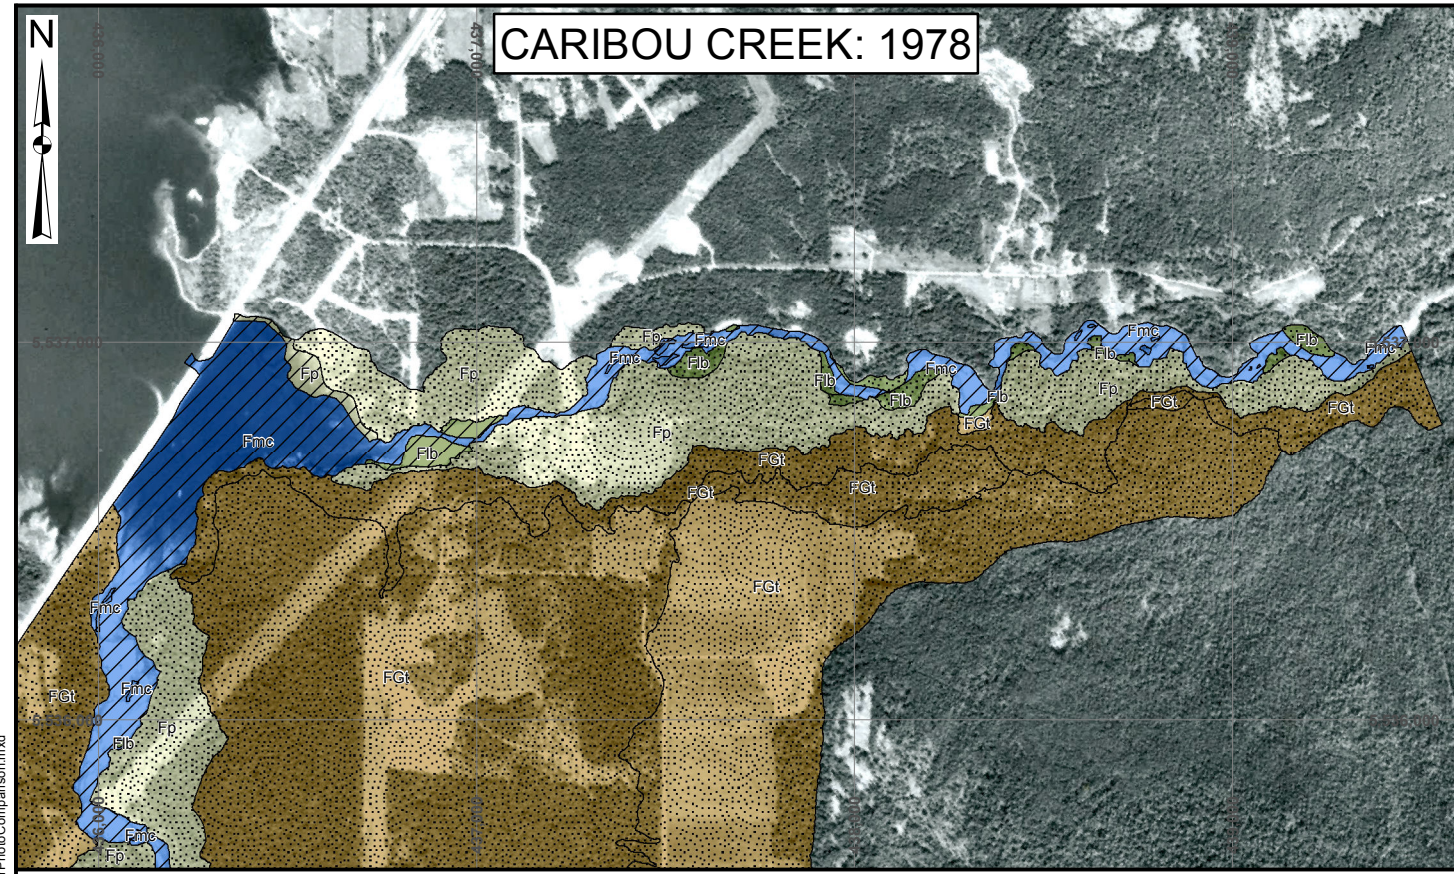

BURTON CREEK STUDY AREA

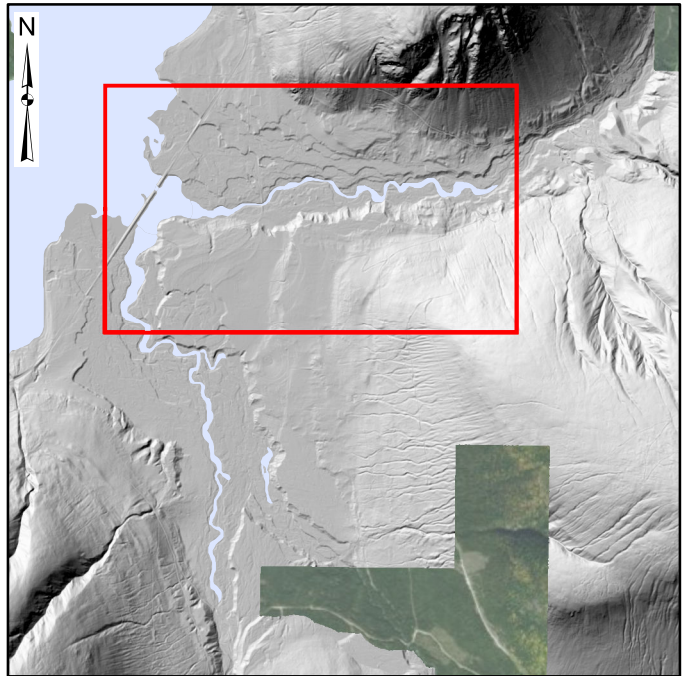

NOTES:
 1. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE NOTED.
 2. THIS DRAWING MUST BE READ IN CONJUNCTION WITH BGC'S REPORT TITLED "RDCK FLOODPLAIN AND STEEP CREEK STUDY - BURTON CREEK", AND DATED MARCH 2020.
 3. BASE TOPOGRAPHIC DATA BASED ON LIDAR PROVIDED BY REGIONAL DISTRICT OF CENTRAL KOOTENAY DATED 2018. BASE IMAGERY REFERENCES IN TABLE 4-2 OF REPORT.
 4. COORDINATE SYSTEM IS NAD 1983 UTM ZONE 11N.
 5. MAPPED UNITS DETERMINED BASED ON CRITERIA OUTLINED IN TABLE 4-3 OF REPORT. ACTIVITY LEVEL OF MAPPED UNITS DETERMINED BASED ON CRITERIA OUTLINED IN TABLE 4-4 OF REPORT. GROUND MOVEMENT LOCATIONS BASED ON GEOMORPHOLOGICAL INTERPRETATION OF LIDAR DATA.
 6. UNLESS BGC AGREES OTHERWISE IN WRITING, THIS DRAWING SHALL NOT BE MODIFIED OR USED FOR ANY PURPOSE OTHER THAN THE PURPOSE FOR WHICH BGC GENERATED IT. BGC SHALL HAVE NO LIABILITY FOR ANY DAMAGES OR LOSS ARISING IN ANY WAY FROM ANY USE OR MODIFICATION OF THIS DOCUMENT NOT AUTHORIZED BY BGC. ANY USE OF OR RELIANCE UPON THIS DOCUMENT OR ITS CONTENT BY THIRD PARTIES SHALL BEAT SUCH THIRD PARTIES' SOLE RISK.

LEGEND	
MAIN-CHANNEL (Fmc)	LATERAL AND POINT BARS (Fib)
SIDE-CHANNEL (Fsc)	ALLUVIAL FAN/DELTA (Ff)
FLOOD-CHANNEL (Ffc)	FLOODPLAIN (Fp)
BACK-CHANNEL (Fbc)	TERRACE (FLUVIAL) (Ft)
ABANDONED-CHANNEL (Facc)	TERRACE (GLACIOFLUVIAL) (FGt)
MID-CHANNEL BAR (Fmb)	CANYON (Rs)
LAKE (L)	GROUND MOVEMENT LOCATION
ACTIVITY LEVEL	
ACTIVE	
DORMANT	




SCALE:	1:20,000
DATE:	MAR 2020
DRAWN:	MW
CHECKED:	ES/VC
APPROVED:	RM

BIGC BGC ENGINEERING INC.
 AN APPLIED EARTH SCIENCES COMPANY



CLIENT:

PROJECT: RDCK FLOODPLAIN AND STEEP CREEK STUDY BURTON CREEK	
TITLE: AIR PHOTO COMPARISON	
PROJECT No.: 0268-007	DWG No: 04 - A

X:\Projects\0268\007_RDCK_NDMP_Stream_2_Support\GIS\Production\Report\2019\030_RDCK_Floodplain_And_SC_Study_ClearWaterBurtonCreek\FINAL\COPIES\04_BurtonCreekAirPhotoComparison.mxd

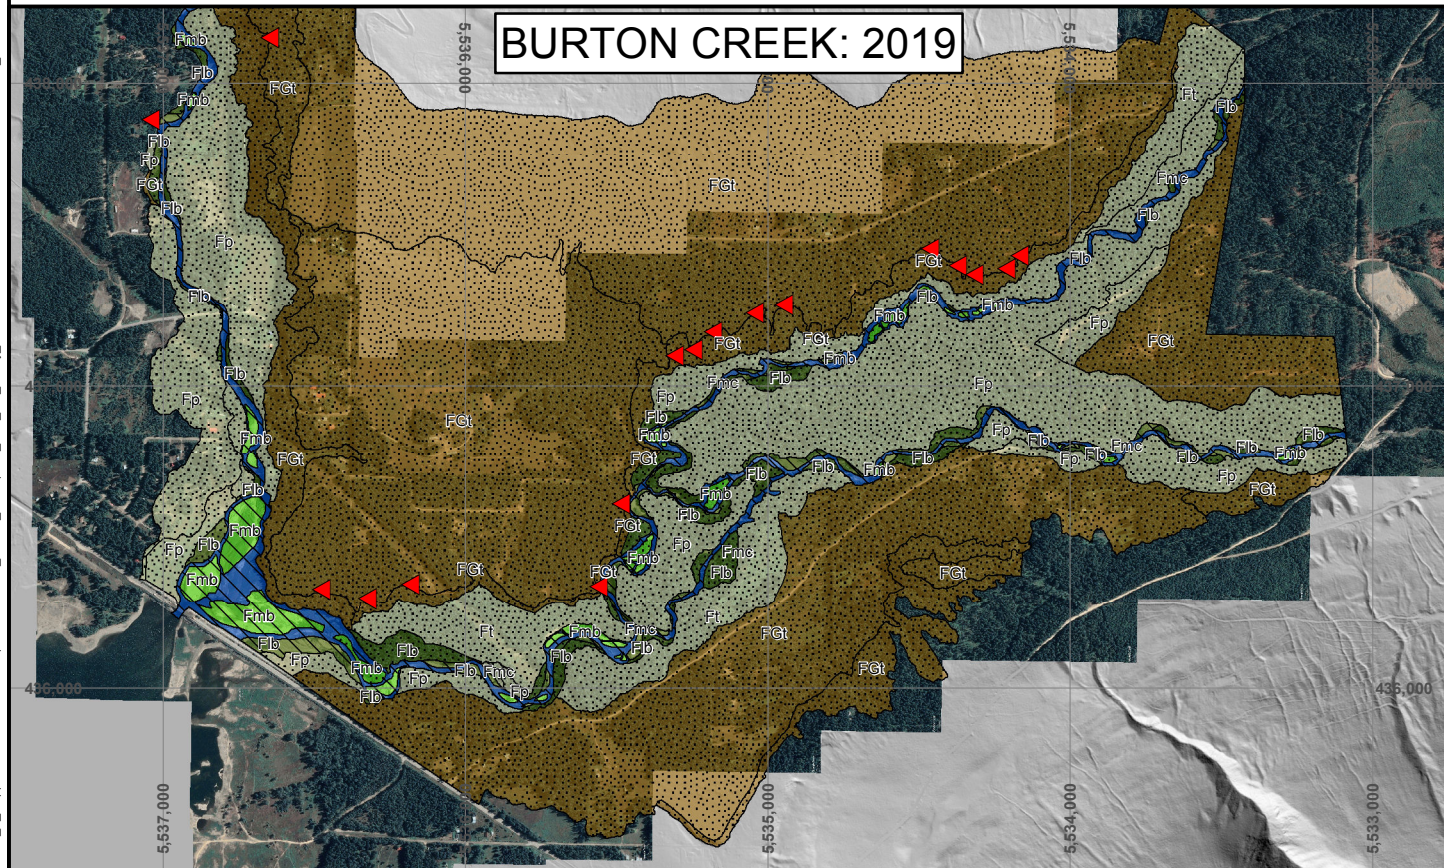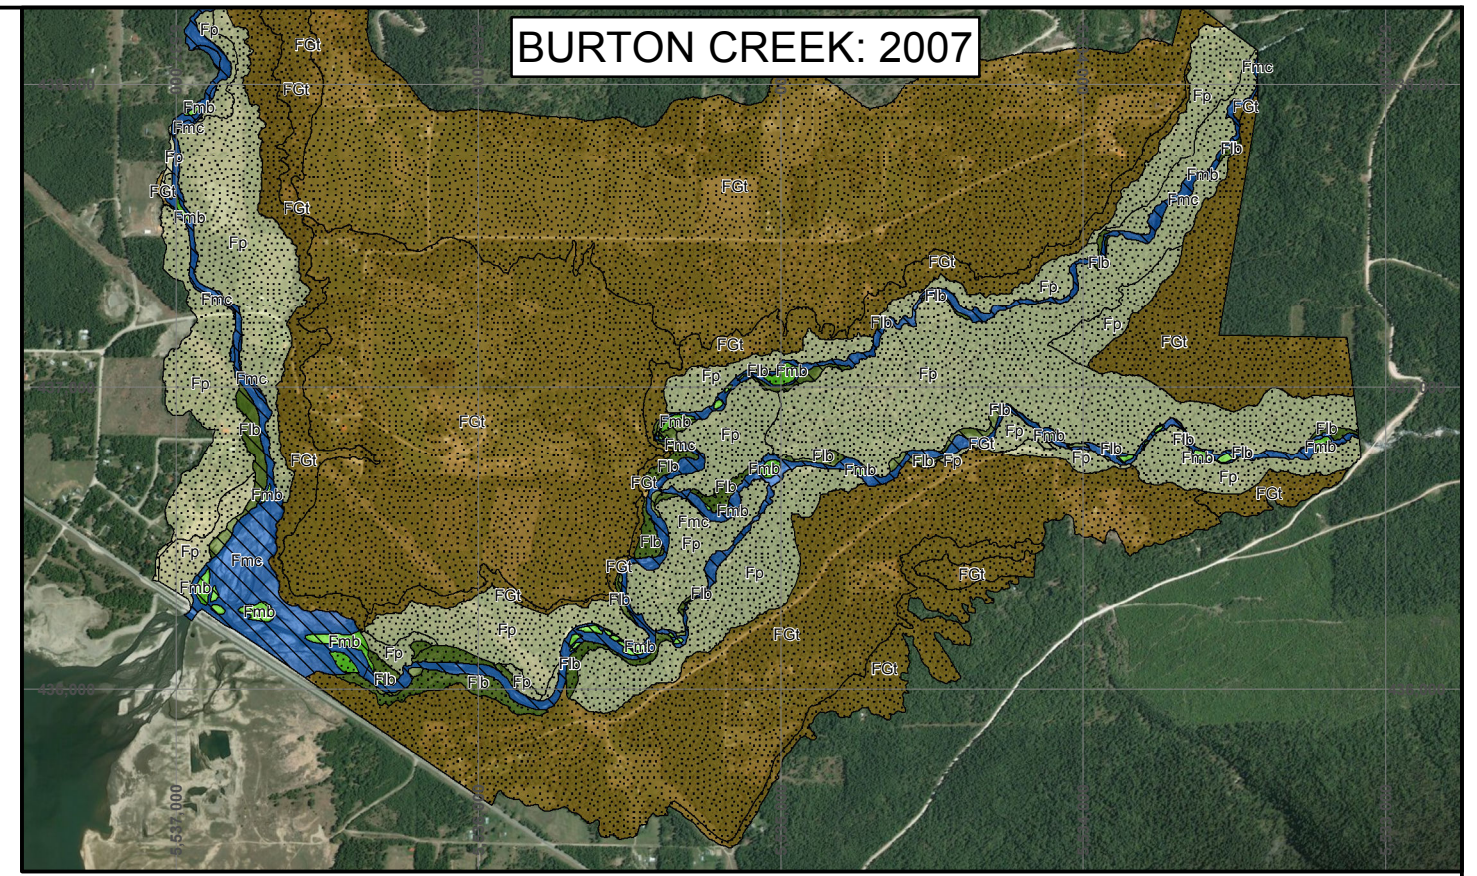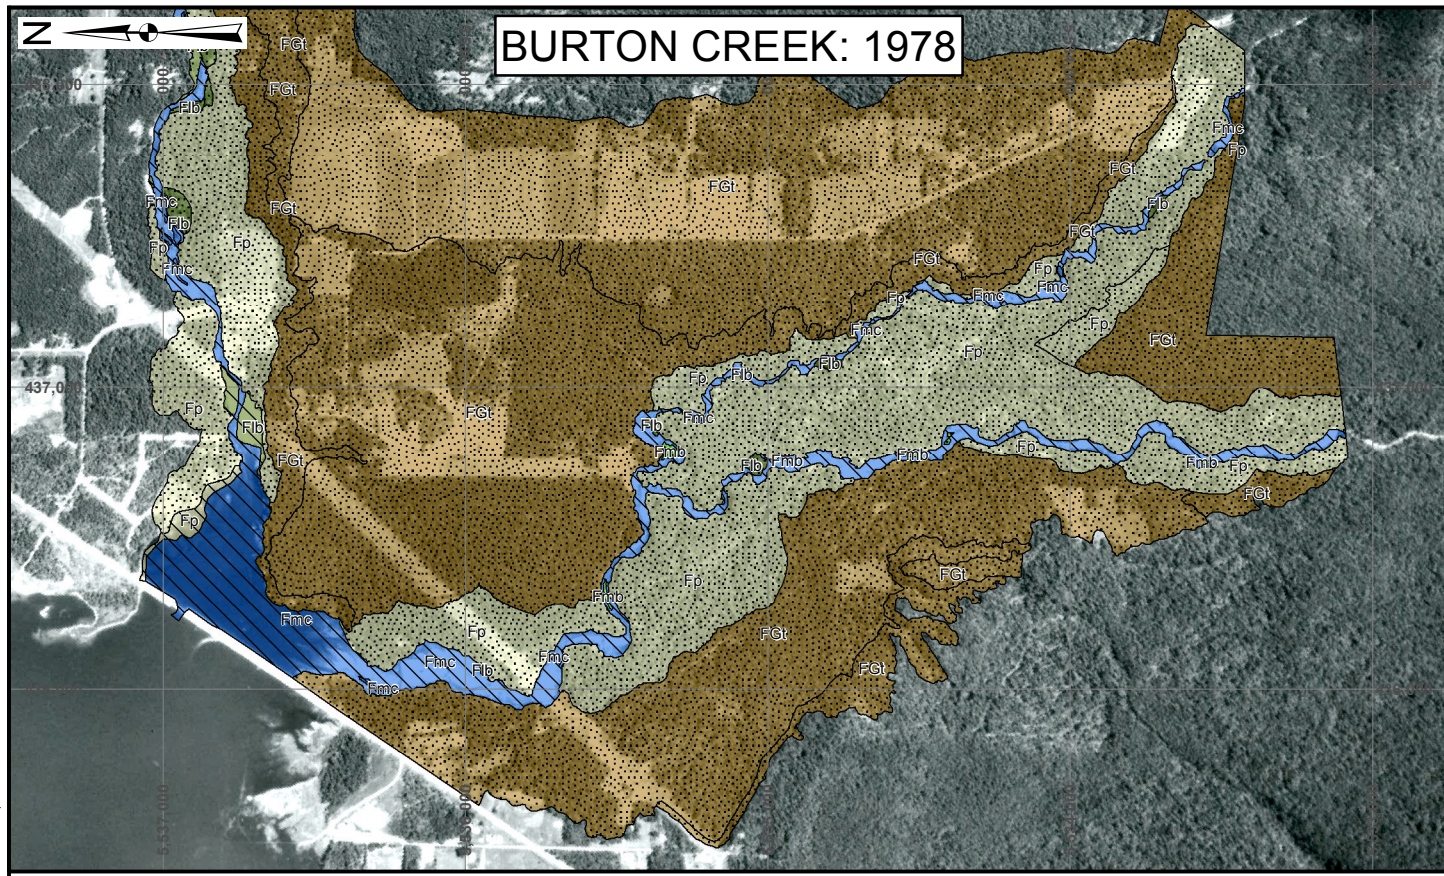

BURTON CREEK STUDY AREA

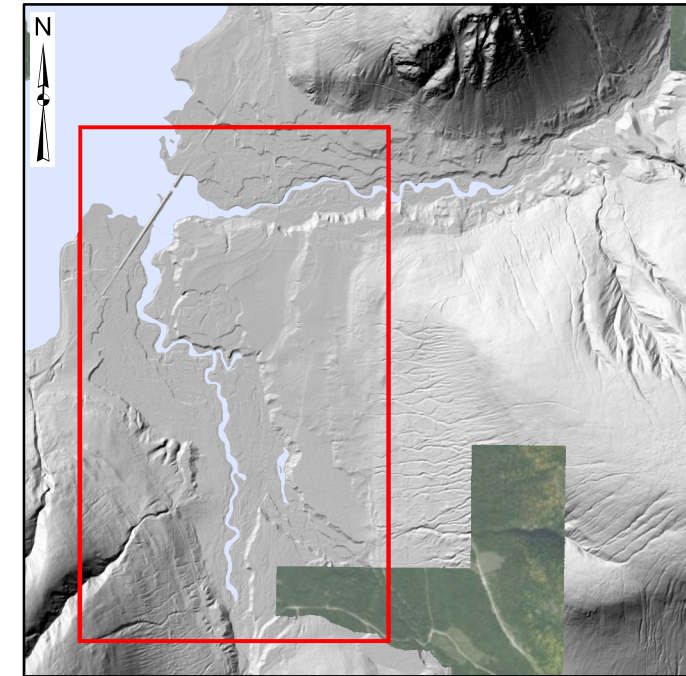

NOTES:
 1. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE NOTED.
 2. THIS DRAWING MUST BE READ IN CONJUNCTION WITH BGC'S REPORT TITLED "RDCK FLOODPLAIN AND STEEP CREEK STUDY - BURTON CREEK", AND DATED MARCH 2020.
 3. BASE TOPOGRAPHIC DATA BASED ON LIDAR PROVIDED BY REGIONAL DISTRICT OF CENTRAL KOOTENAY DATED 2018. BASE IMAGERY REFERENCES IN TABLE 4-2 OF REPORT.
 4. COORDINATE SYSTEM IS NAD 1983 UTM ZONE 11N.
 5. MAPPED UNITS DETERMINED BASED ON CRITERIA OUTLINED IN TABLE 4-3 OF REPORT. ACTIVITY LEVEL OF MAPPED UNITS DETERMINED BASED ON CRITERIA OUTLINED IN TABLE 4-4 OF REPORT. GROUND MOVEMENT LOCATIONS BASED ON GEOMORPHOLOGICAL INTERPRETATION OF LIDAR DATA.
 6. UNLESS BGC AGREES OTHERWISE IN WRITING, THIS DRAWING SHALL NOT BE MODIFIED OR USED FOR ANY PURPOSE OTHER THAN THE PURPOSE FOR WHICH BGC GENERATED IT. BGC SHALL HAVE NO LIABILITY FOR ANY DAMAGES OR LOSS ARISING IN ANY WAY FROM ANY USE OR MODIFICATION OF THIS DOCUMENT NOT AUTHORIZED BY BGC. ANY USE OF OR RELIANCE UPON THIS DOCUMENT OR ITS CONTENT BY THIRD PARTIES SHALL BEAT SUCH THIRD PARTIES' SOLE RISK.

LEGEND	
MAIN-CHANNEL (Fmc)	LATERAL AND POINT BARS (Fb)
SIDE-CHANNEL (Fsc)	ALLUVIAL FAN/Delta (Ff)
FLOOD-CHANNEL (Ffo)	FLOODPLAIN (Fp)
BACK-CHANNEL (Fbc)	TERRACE (FLUVIAL) (Ft)
ABANDONED-CHANNEL (Fbc)	TERRACE (GLACIOFLUVIAL) (FGl)
MID-CHANNEL BAR (Fmb)	CANYON (Rs)
	LAKE (L)
	GROUND MOVEMENT LOCATION
	ACTIVITY LEVEL
	ACTIVE
	DORMANT






SCALE:	1:25,000
DATE:	MAR 2020
DRAWN:	MW
CHECKED:	ES/VC
APPROVED:	RM

BGC ENGINEERING INC.
 AN APPLIED EARTH SCIENCES COMPANY

CLIENT:

PROJECT: RDCK FLOODPLAIN AND STEEP CREEK STUDY BURTON CREEK	
TITLE: AIR PHOTO COMPARISON	
PROJECT No.: 0268-007	DWG No: 04 - B

X:\Projects\0268007_RDCK_NDMP_Stream_2_Support\GIS\Production\Report\2019\1030_RDCK_Floodplain_And_SC_Study_CLEARWATER\BurtonCreek\FINAL\COPIES\04_BurtonCreekAirPhotoComparison.mxd

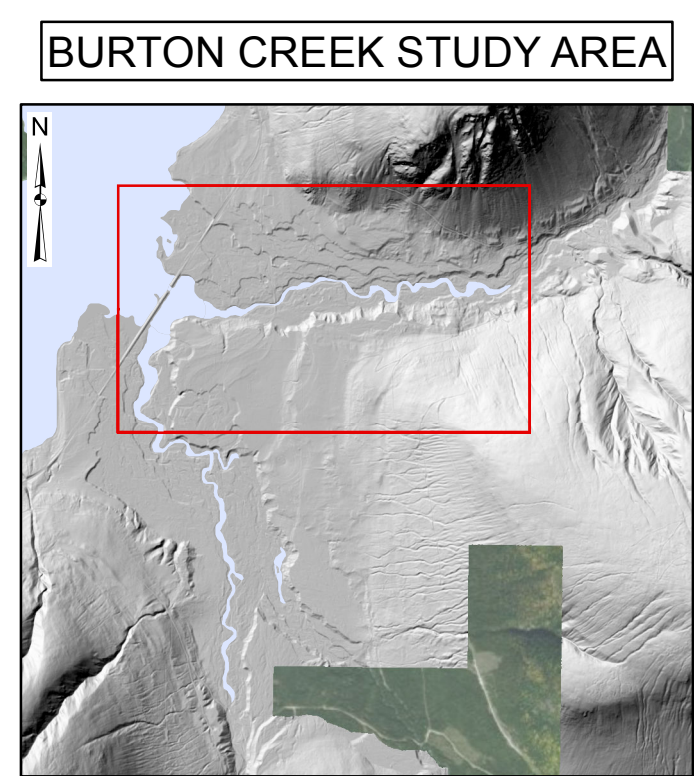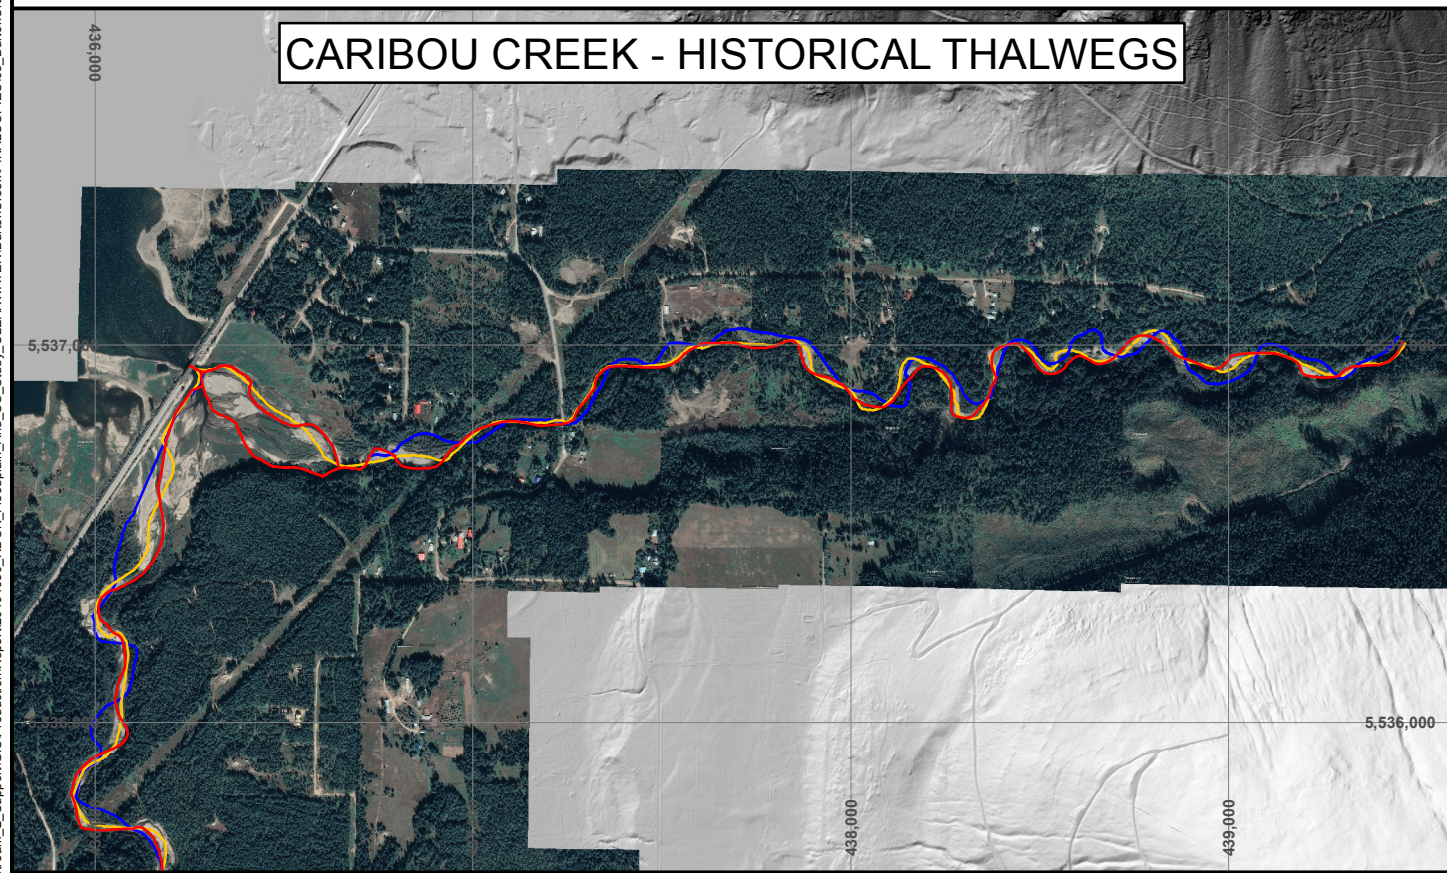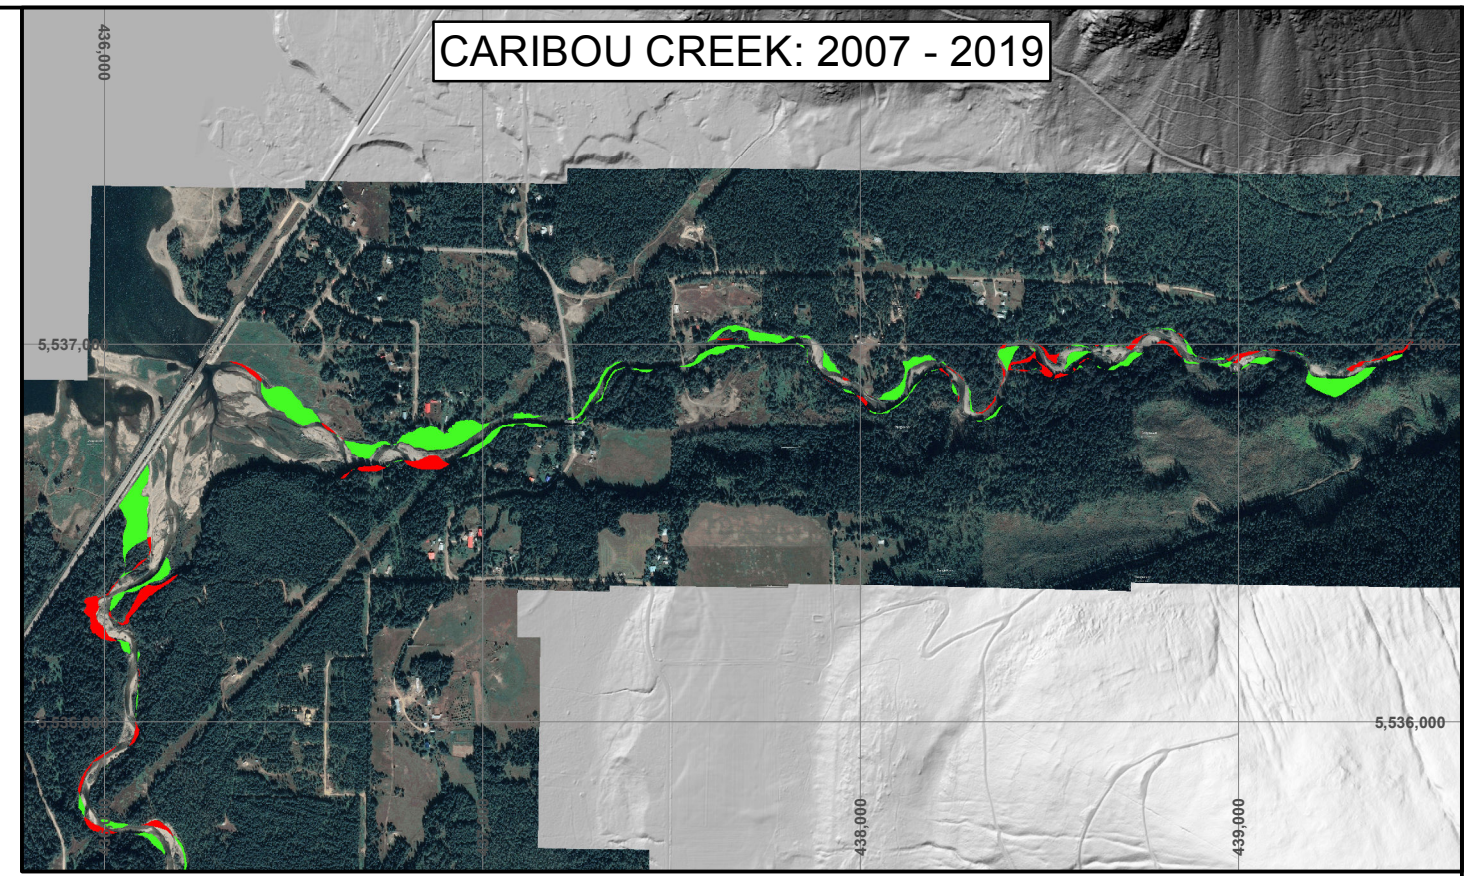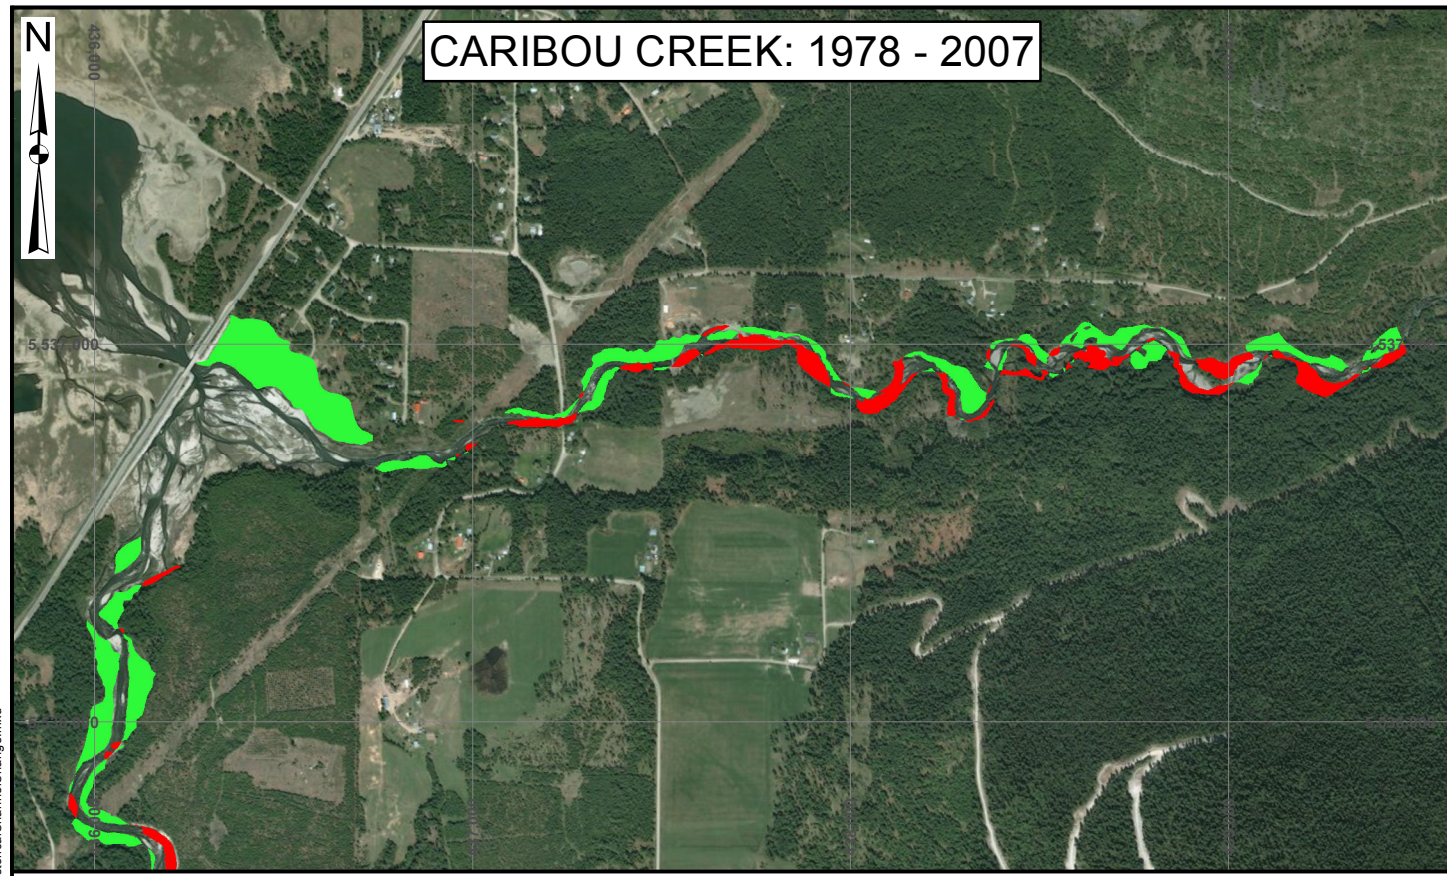

NOTES:
 1. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE NOTED.
 2. THIS DRAWING MUST BE READ IN CONJUNCTION WITH BGC'S REPORT TITLED "RDCK FLOODPLAIN AND STEEP CREEK STUDY - BURTON CREEK", AND DATED MARCH 2020.
 3. BASE TOPOGRAPHIC DATA BASED ON LIDAR PROVIDED BY REGIONAL DISTRICT OF CENTRAL KOOTENAY DATED 2018. BASE IMAGERY REFERENCES IN TABLE 4-2 OF REPORT.
 4. COORDINATE SYSTEM IS NAD 1983 UTM ZONE 11N.
 5. CHANGE DETECTION CRITERIA DESCRIBED IN TABLE 4-5 OF REPORT. HISTORICAL THALWEGS INTERPRETED FROM PHOTOGRAPHS AND MANUALLY DIGITIZED.
 6. UNLESS BGC AGREES OTHERWISE IN WRITING, THIS DRAWING SHALL NOT BE MODIFIED OR USED FOR ANY PURPOSE OTHER THAN THE PURPOSE FOR WHICH BGC GENERATED IT. BGC SHALL HAVE NO LIABILITY FOR ANY DAMAGES OR LOSS ARISING IN ANY WAY FROM ANY USE OR MODIFICATION OF THIS DOCUMENT NOT AUTHORIZED BY BGC. ANY USE OF OR RELIANCE UPON THIS DOCUMENT OR ITS CONTENT BY THIRD PARTIES SHALL BE AT SUCH THIRD PARTIES' SOLE RISK.

LEGEND	
	HISTORICAL THALWEG (1978)
	HISTORICAL THALWEG (2007)
	HISTORICAL THALWEG (2019)
	BANK EROSION, CHANNEL MIGRATION
	DEPOSITION, STABILIZATION






SCALE:	1:20,000
DATE:	MAR 2020
DRAWN:	MW
CHECKED:	ES/VC
APPROVED:	RM

BGC ENGINEERING INC.
 AN APPLIED EARTH SCIENCES COMPANY

CLIENT:

PROJECT: RDCK FLOODPLAIN AND STEEP CREEK STUDY BURTON CREEK	
TITLE: HISTORICAL CHANNEL CHANGE	
PROJECT No.: 0268-007	DWG No: 05 - A

X:\Projects\0268\007_RDCK_NDMP_Stream_2_Support\GIS\Production\Report\2019\030_RDCK_Floodplain_And_SC_Study_CLEARWATER\BurtonCreek\FINAL\COPIES\05_BurtonCreekHistoricalChannelChange.mxd

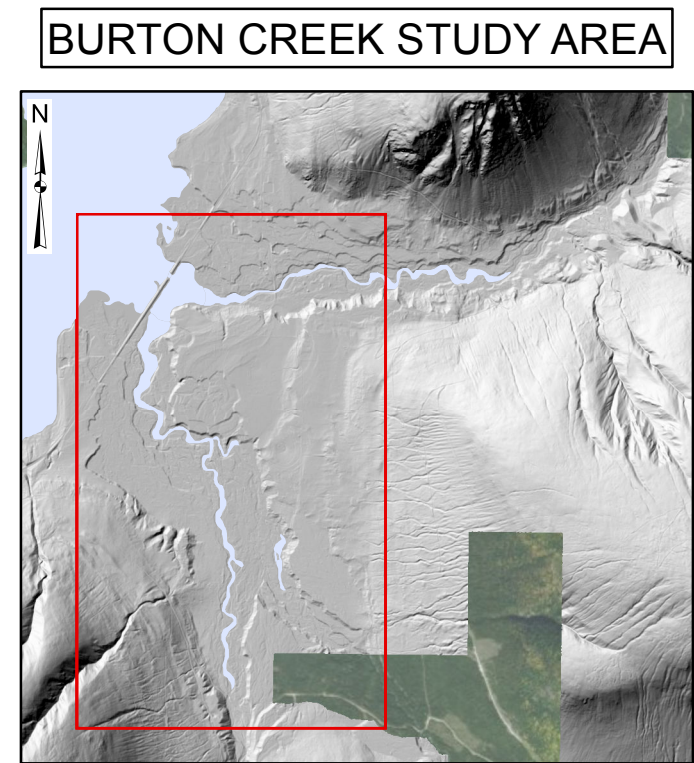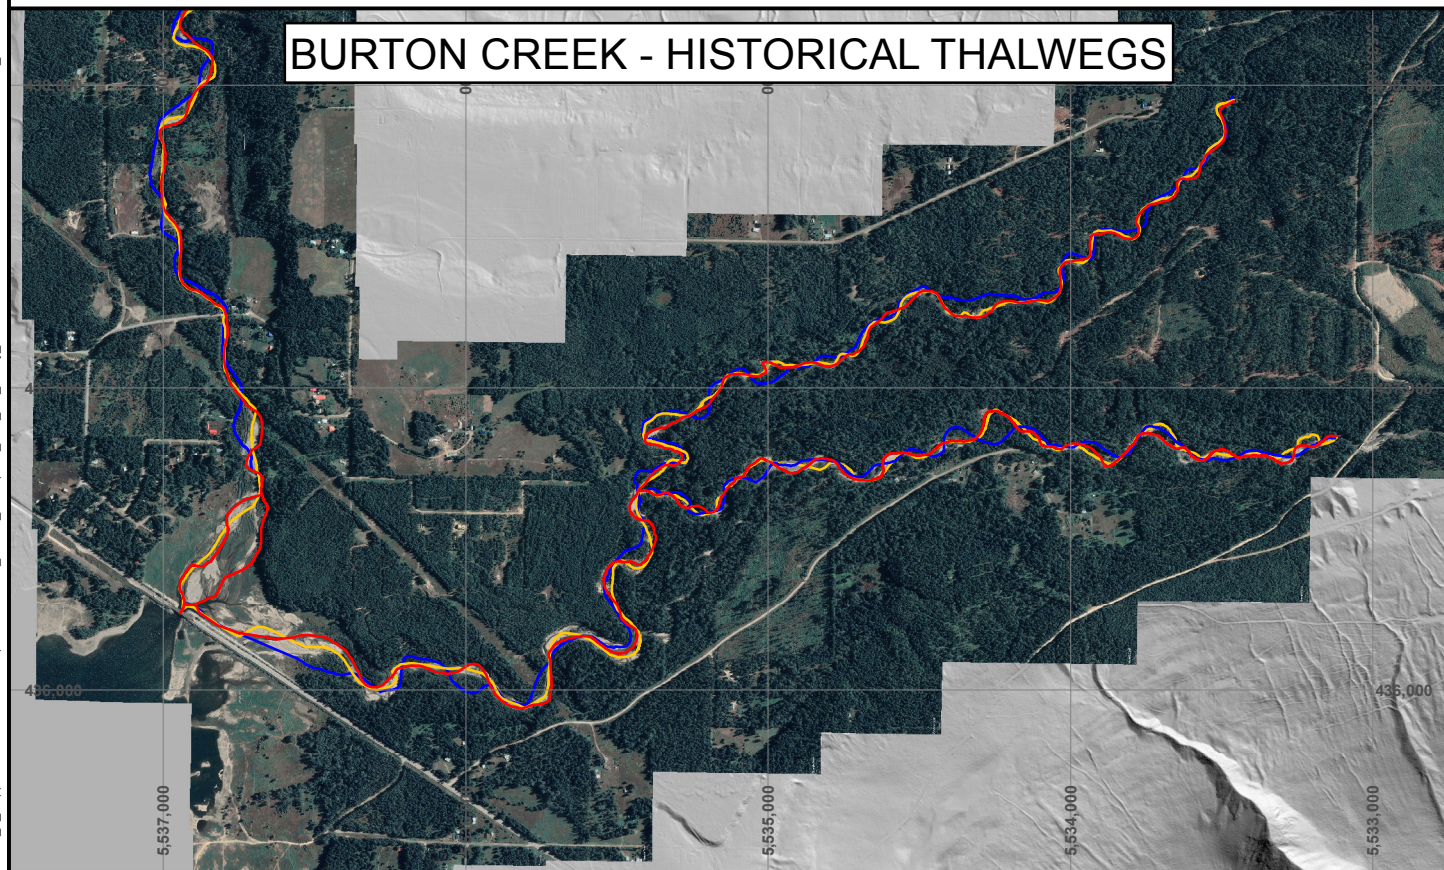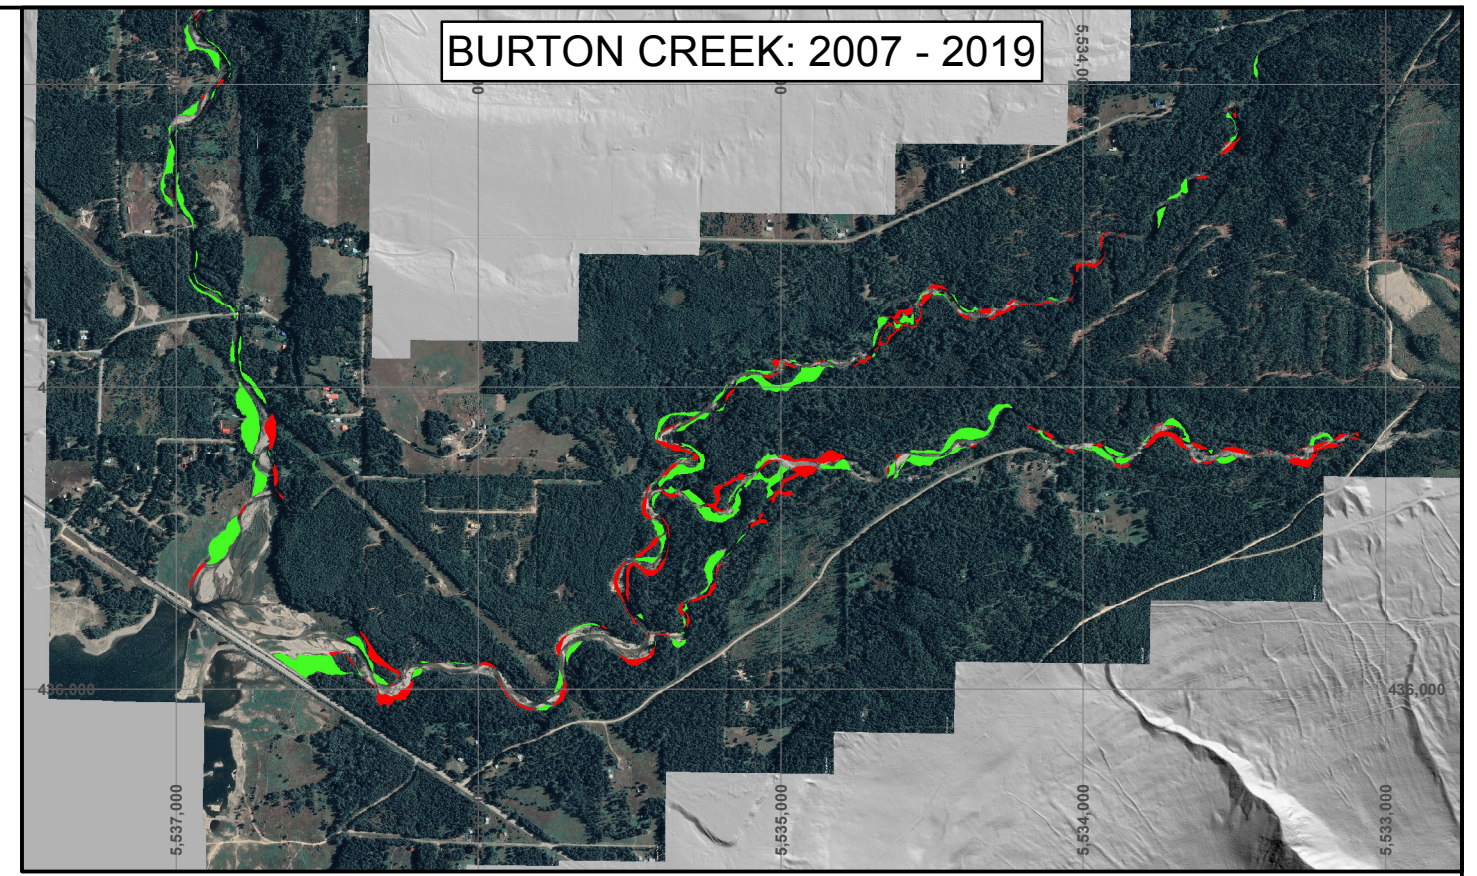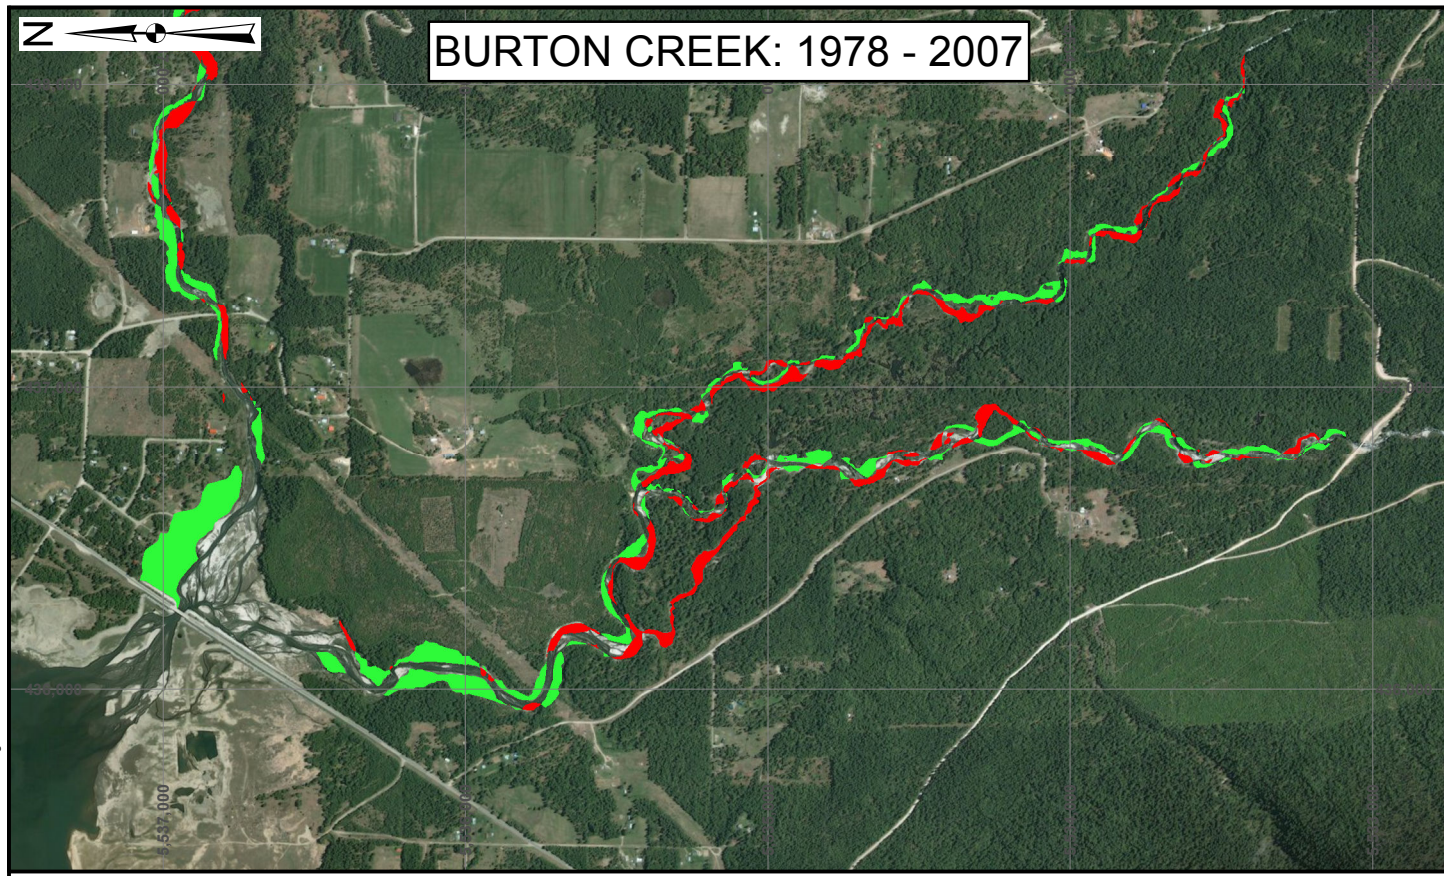

NOTES:
 1. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE NOTED.
 2. THIS DRAWING MUST BE READ IN CONJUNCTION WITH BGC'S REPORT TITLED "RDCK FLOODPLAIN AND STEEP CREEK STUDY - BURTON CREEK", AND DATED MARCH 2020.
 3. BASE TOPOGRAPHIC DATA BASED ON LIDAR PROVIDED BY REGIONAL DISTRICT OF CENTRAL KOOTENAY DATED 2018. BASE IMAGERY REFERENCES IN TABLE 4-2 OF REPORT.
 4. COORDINATE SYSTEM IS NAD 1983 UTM ZONE 11N.
 5. CHANGE DETECTION CRITERIA DESCRIBED IN TABLE 4-5 OF REPORT. HISTORICAL THALWEGS INTERPRETED FROM PHOTOGRAPHS AND MANUALLY DIGITIZED.
 6. UNLESS BGC AGREES OTHERWISE IN WRITING, THIS DRAWING SHALL NOT BE MODIFIED OR USED FOR ANY PURPOSE OTHER THAN THE PURPOSE FOR WHICH BGC GENERATED IT. BGC SHALL HAVE NO LIABILITY FOR ANY DAMAGES OR LOSS ARISING IN ANY WAY FROM ANY USE OR MODIFICATION OF THIS DOCUMENT NOT AUTHORIZED BY BGC. ANY USE OF OR RELIANCE UPON THIS DOCUMENT OR ITS CONTENT BY THIRD PARTIES SHALL BE AT SUCH THIRD PARTIES' SOLE RISK.

LEGEND	
	HISTORICAL THALWEG (1978)
	HISTORICAL THALWEG (2007)
	HISTORICAL THALWEG (2019)
	BANK EROSION, CHANNEL MIGRATION
	DEPOSITION, STABILIZATION




SCALE:	1:25,000
DATE:	MAR 2020
DRAWN:	MW
CHECKED:	ES/VC
APPROVED:	RM

BGC ENGINEERING INC.
 AN APPLIED EARTH SCIENCES COMPANY

CLIENT:

PROJECT: RDCK FLOODPLAIN AND STEEP CREEK STUDY BURTON CREEK	
TITLE: HISTORICAL CHANNEL CHANGE	
PROJECT No.: 0268-007	DWG No: 05 - B

X:\Projects\0268\007_RDCK_NDMP_Stream_2_Support\GIS\Production\Report\2019\1030_RDCK_Floodplain_And_SC_Study_CLEARWATER\BurtonCreek\FINAL\COPIES\05_BurtonCreekHistoricalChannelChange.mxd

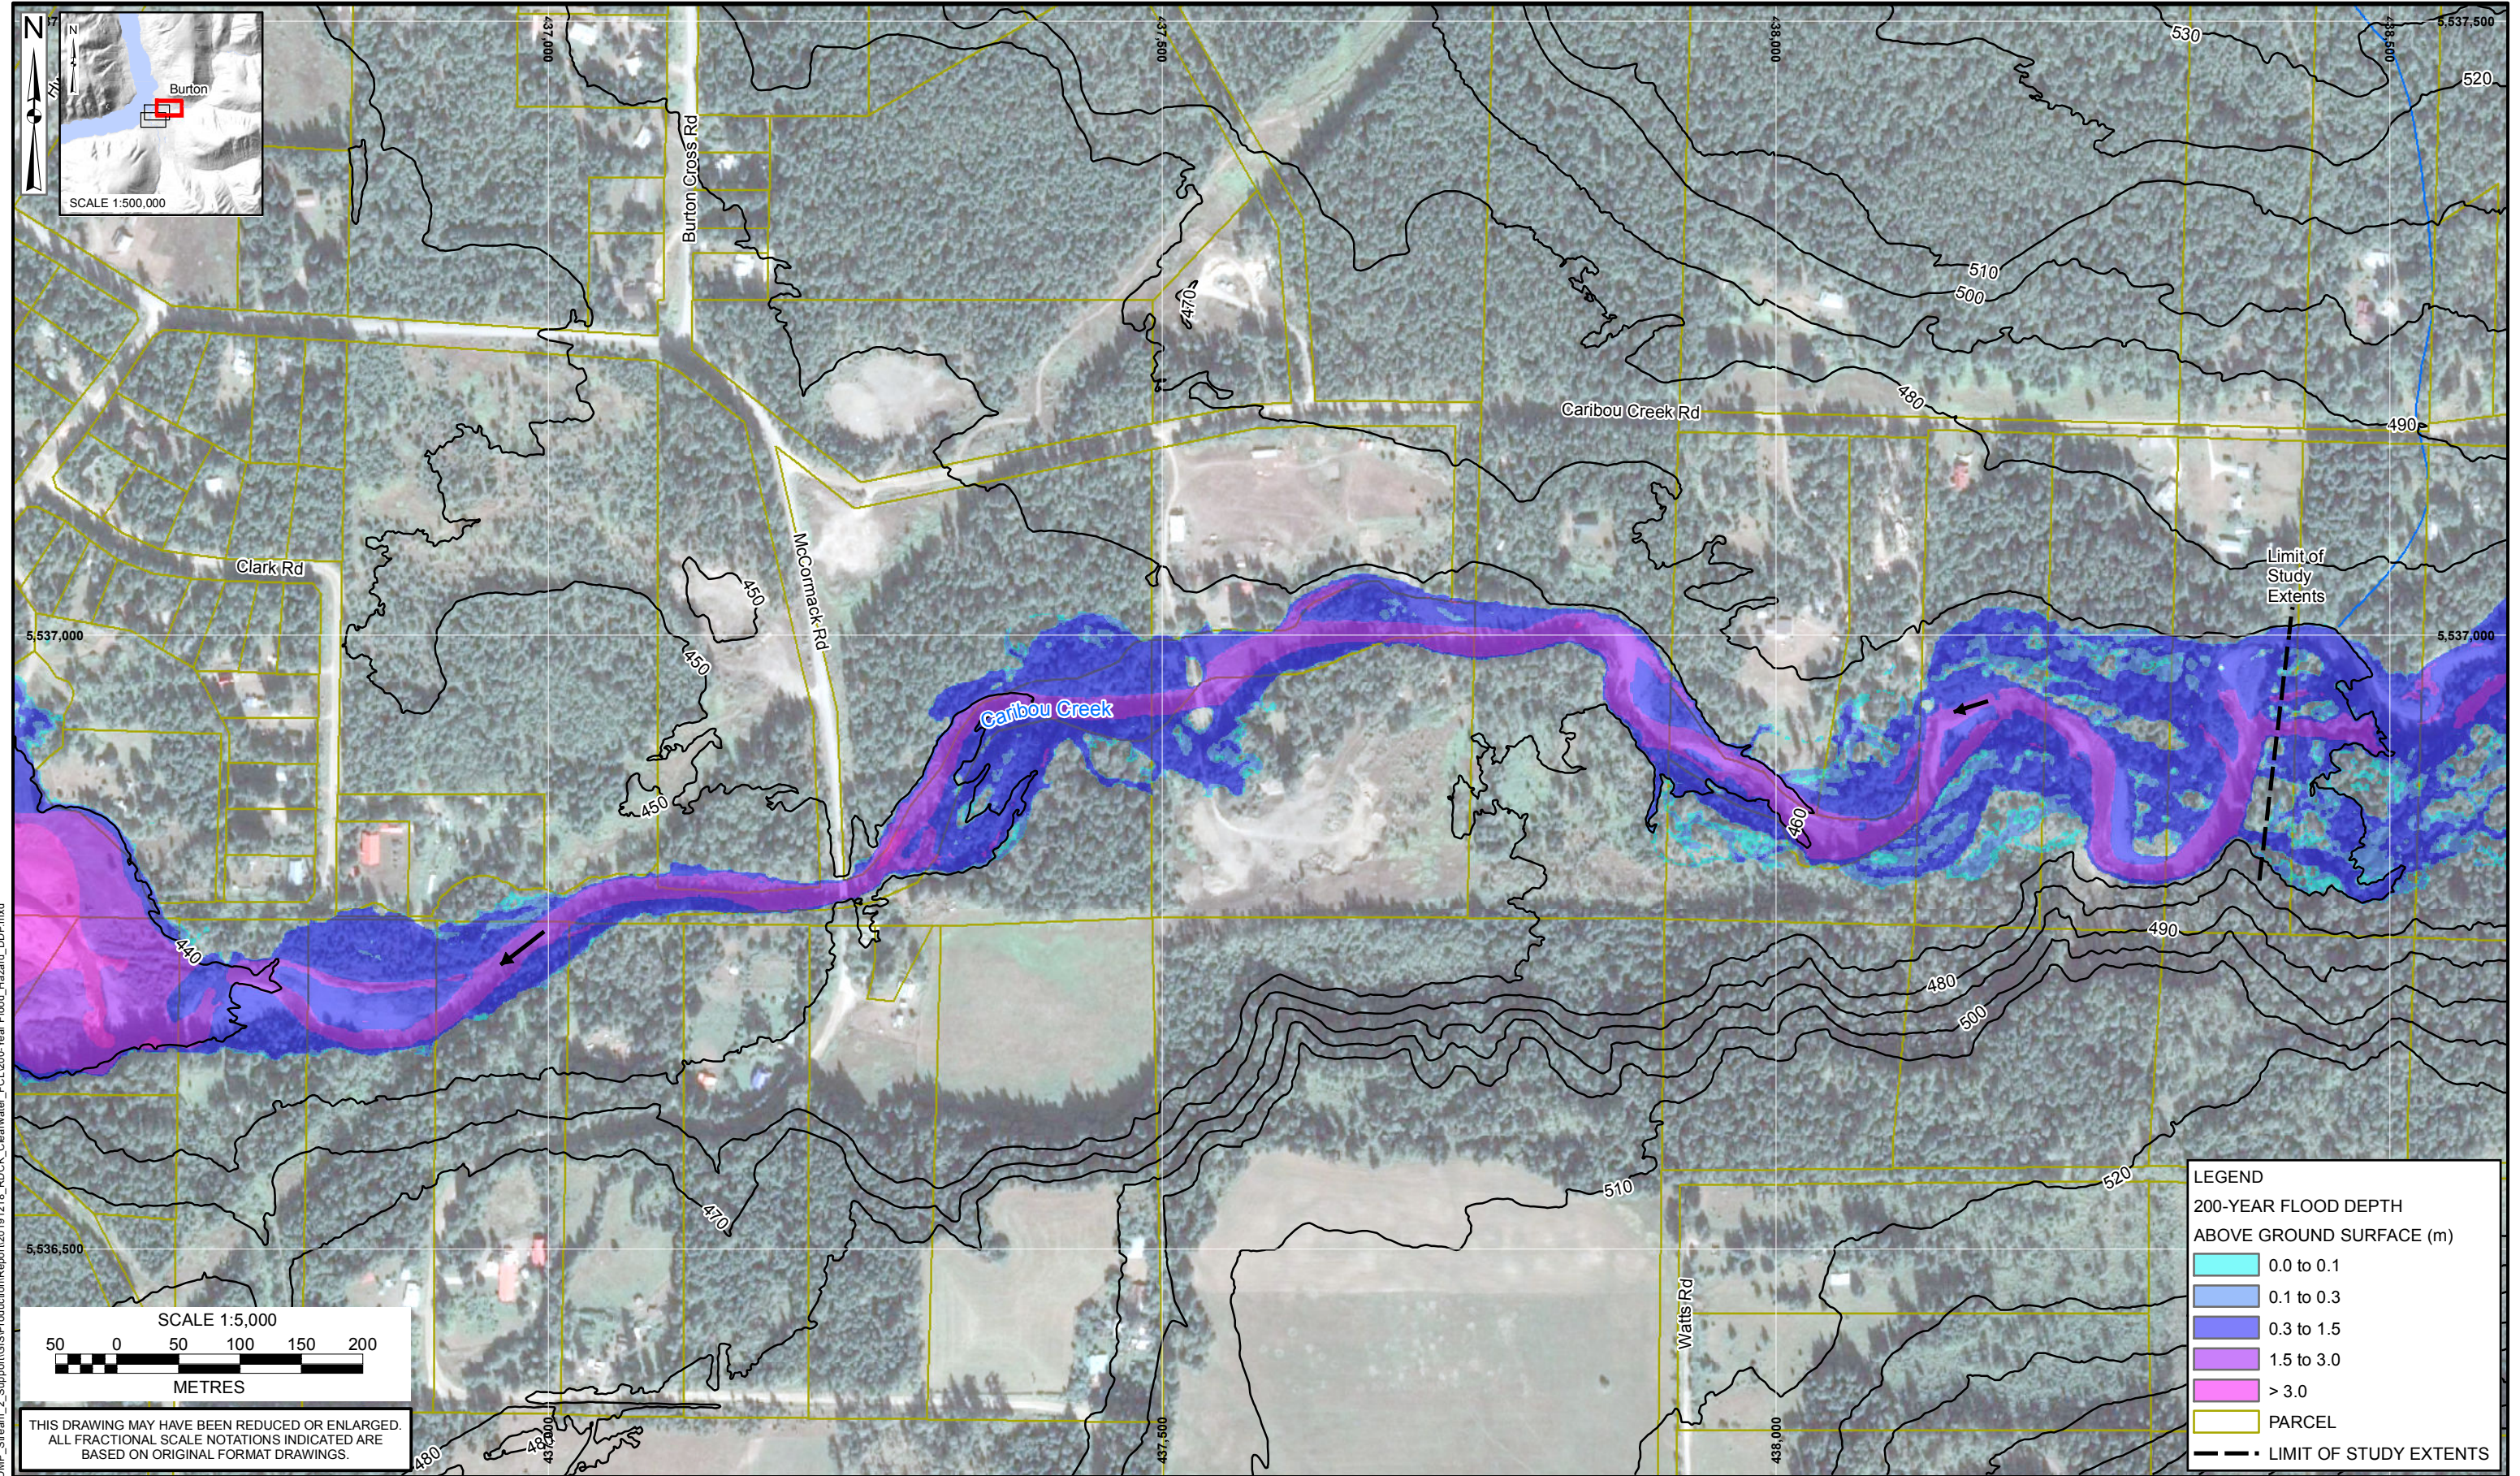

THIS DRAWING MAY HAVE BEEN REDUCED OR ENLARGED.
ALL FRACTIONAL SCALE NOTATIONS INDICATED ARE
BASED ON ORIGINAL FORMAT DRAWINGS.

LEGEND	
200-YEAR FLOOD DEPTH ABOVE GROUND SURFACE (m)	
	0.0 to 0.1
	0.1 to 0.3
	0.3 to 1.5
	1.5 to 3.0
	> 3.0
	PARCEL
	LIMIT OF STUDY EXTENTS


NOTES:
 1. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE NOTED.
 2. THIS DRAWING MUST BE READ IN CONJUNCTION WITH BGC'S REPORT TITLED "RDCK FLOODPLAIN AND STEEP CREEK STUDY BURTON CREEK", AND DATED MARCH 2020.
 3. BASE TOPOGRAPHIC DATA BASED ON LIDAR PROVIDED BY RDCK DATED 2017 AND 2018. CONTOUR INTERVAL IS 10 m. IMAGERY FROM GOOGLE EARTH/PARCEL MAP BC. FLOOD DEPTH BASED ON THE 200-YEAR FLOOD USING THE INSTANTANEOUS PEAK DISCHARGE ADJUSTED FOR CLIMATE CHANGE AND LOWER ARROW LAKE ELEVATION OF 440.70 m.
 4. PROJECTION IS NAD 1983 UTM ZONE 11N. VERTICAL DATUM IS CGVD2013.
 5. UNLESS BGC AGREES OTHERWISE IN WRITING, THIS DRAWING SHALL NOT BE MODIFIED OR USED FOR ANY PURPOSE OTHER THAN THE PURPOSE FOR WHICH BGC GENERATED IT. BGC SHALL HAVE NO LIABILITY FOR ANY DAMAGES OR LOSS ARISING IN ANY WAY FROM ANY USE OR MODIFICATION OF THIS DOCUMENT NOT AUTHORIZED BY BGC. ANY USE OF OR RELIANCE UPON THIS DOCUMENT OR ITS CONTENT BY THIRD PARTIES SHALL BE AT SUCH THIRD PARTIES' SOLE RISK.

SCALE:	1:5,000
DATE:	MAR 2020
DRAWN:	LL
CHECKED:	PG
APPROVED:	RM



BGC ENGINEERING INC.
 AN APPLIED EARTH SCIENCES COMPANY

PROJECT: RDCK FLOODPLAIN AND STEEP CREEK STUDY BURTON CREEK	
TITLE: 200-YEAR FLOOD HAZARD (SHEET 1 OF 3)	
PROJECT No.: 0268 007	DWG No: 06

X:\Projects\0268007_RDCK_NDMP_Stream_2_Support\GIS\Production\Report\20191218_RDCK_Clearwater_FCL200-Year Flood_Hazard_DOP.mxd

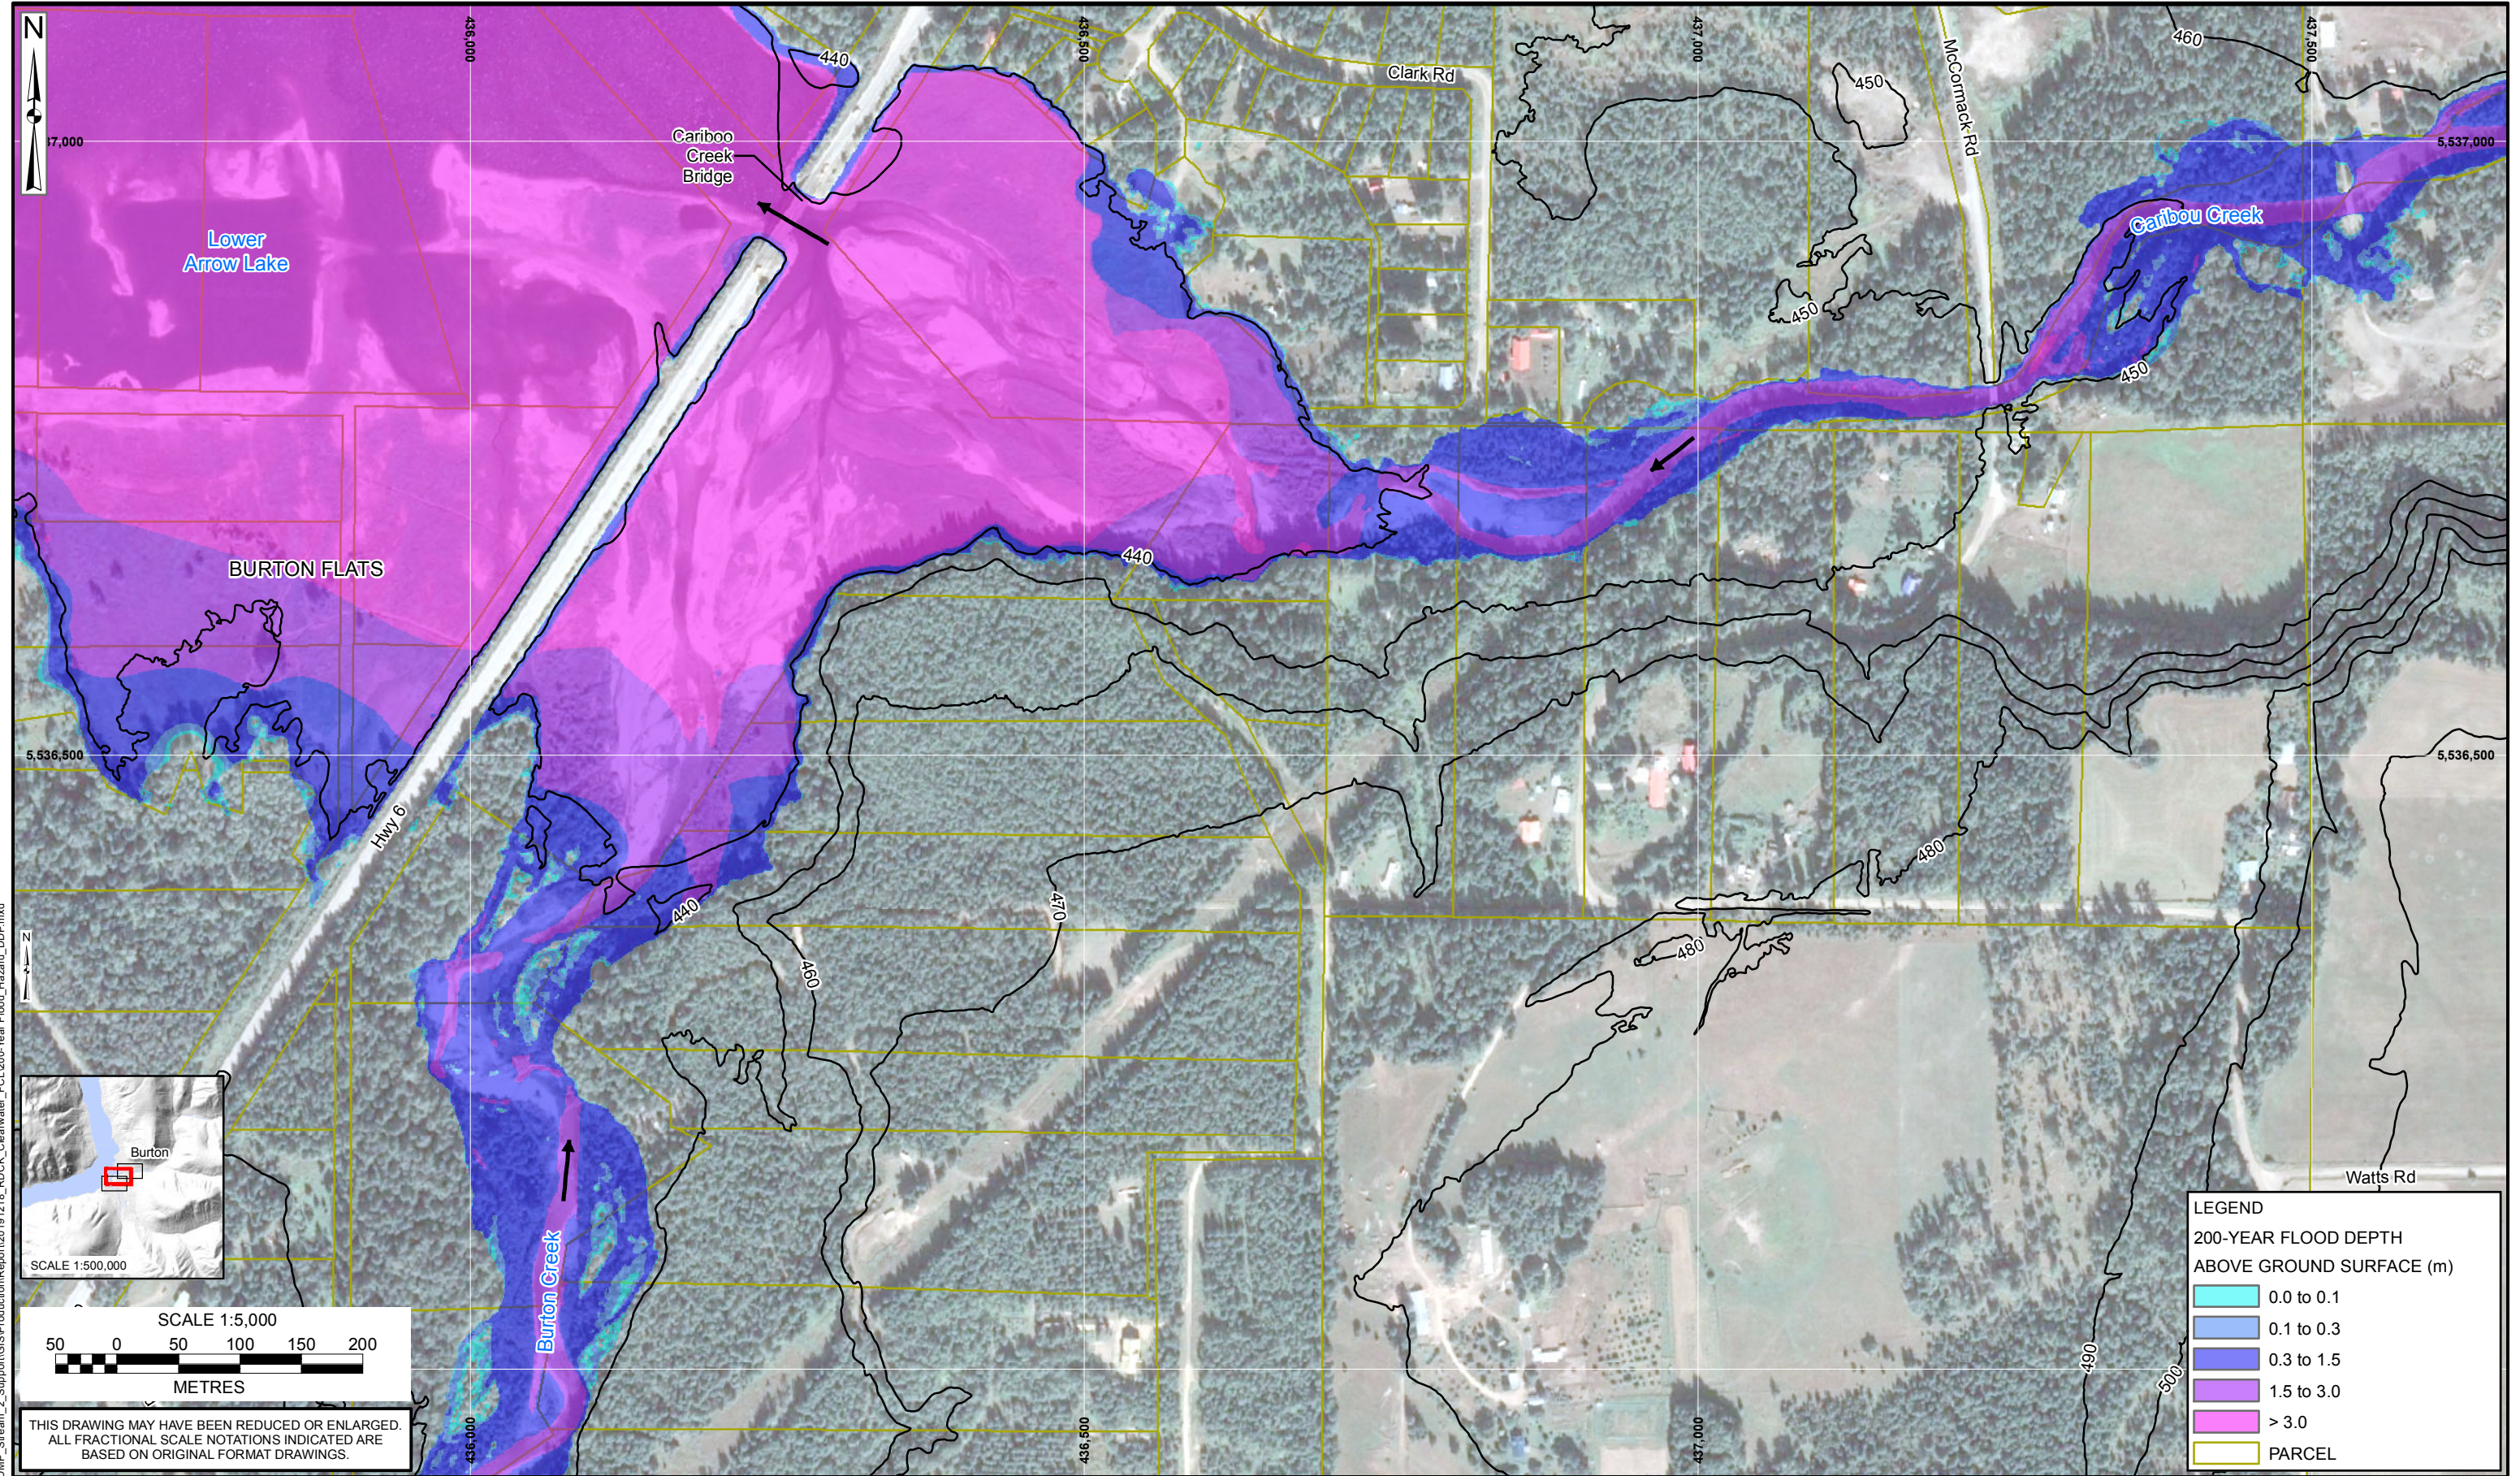

X:\Projects\0268\007_RDCK_NDMP_Stream_2_Support\GIS\Production\Report\20191218_RDCK_Cleanwater_FCL\200-Year Flood_Hazard_DDP.mxd




THIS DRAWING MAY HAVE BEEN REDUCED OR ENLARGED.
ALL FRACTIONAL SCALE NOTATIONS INDICATED ARE
BASED ON ORIGINAL FORMAT DRAWINGS.

NOTES:
 1. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE NOTED.
 2. THIS DRAWING MUST BE READ IN CONJUNCTION WITH BGC'S REPORT TITLED "RDCK FLOODPLAIN AND STEEP CREEK STUDY BURTON CREEK", AND DATED MARCH 2020.
 3. BASE TOPOGRAPHIC DATA BASED ON LIDAR PROVIDED BY RDCK DATED 2017 AND 2018. CONTOUR INTERVAL IS 10 m. IMAGERY FROM GOOGLE EARTH. PARCEL DATA FROM PARCELMAP BC. FLOOD DEPTH BASED ON THE 200-YEAR FLOOD USING THE INSTANTANEOUS PEAK DISCHARGE ADJUSTED FOR CLIMATE CHANGE AND LOWER ARROW LAKE ELEVATION OF 440.70 m.
 4. PROJECTION IS NAD 1983 UTM ZONE 11N. VERTICAL DATUM IS CGVD2013.
 5. UNLESS BGC AGREES OTHERWISE IN WRITING, THIS DRAWING SHALL NOT BE MODIFIED OR USED FOR ANY PURPOSE OTHER THAN THE PURPOSE FOR WHICH BGC GENERATED IT. BGC SHALL HAVE NO LIABILITY FOR ANY DAMAGES OR LOSS ARISING IN ANY WAY FROM ANY USE OR MODIFICATION OF THIS DOCUMENT NOT AUTHORIZED BY BGC. ANY USE OF OR RELIANCE UPON THIS DOCUMENT OR ITS CONTENT BY THIRD PARTIES SHALL BE AT SUCH THIRD PARTIES' SOLE RISK.

SCALE:	1:5,000
DATE:	MAR 2020
DRAWN:	LL
CHECKED:	PG
APPROVED:	RM

BGC ENGINEERING INC.
 AN APPLIED EARTH SCIENCES COMPANY


PROJECT: RDCK FLOODPLAIN AND STEEP CREEK STUDY BURTON CREEK	
TITLE: 200-YEAR FLOOD HAZARD (SHEET 2 OF 3)	
PROJECT No.: 0268 007	DWG No.: 06

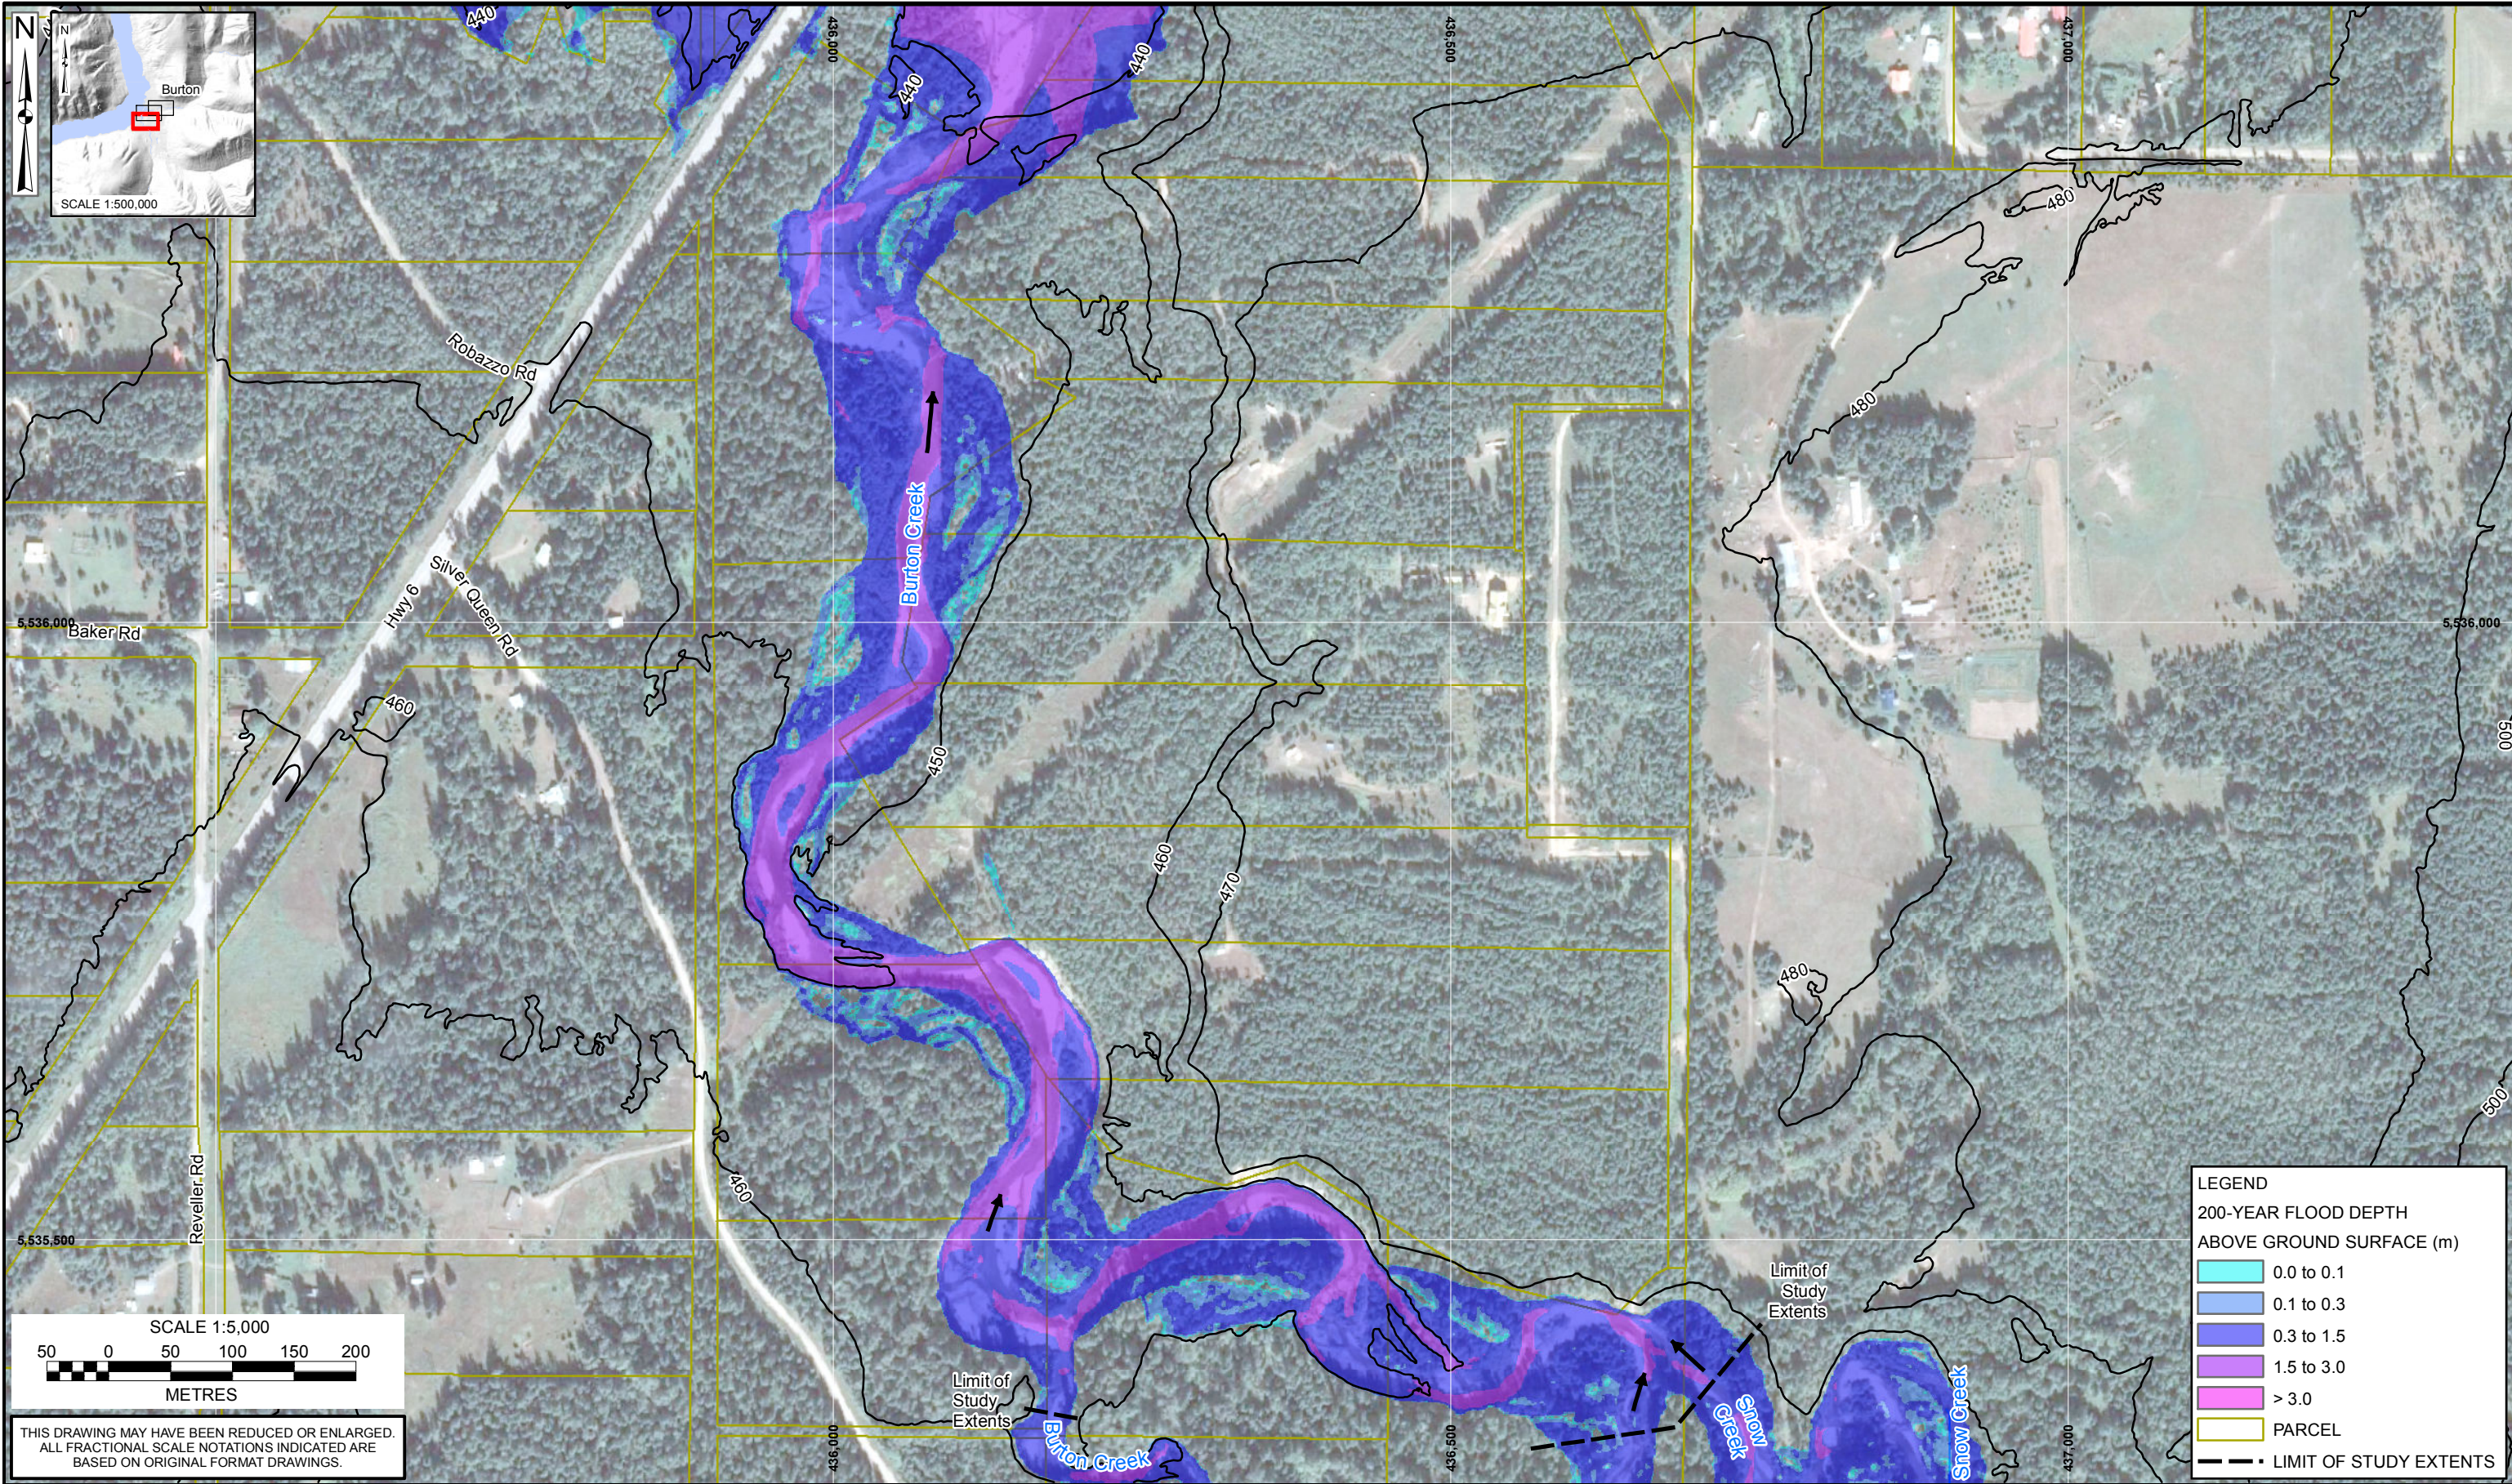

LEGEND

200-YEAR FLOOD DEPTH
ABOVE GROUND SURFACE (m)

- 0.0 to 0.1
- 0.1 to 0.3
- 0.3 to 1.5
- 1.5 to 3.0
- > 3.0
- PARCEL
- LIMIT OF STUDY EXTENTS



THIS DRAWING MAY HAVE BEEN REDUCED OR ENLARGED.
ALL FRACTIONAL SCALE NOTATIONS INDICATED ARE
BASED ON ORIGINAL FORMAT DRAWINGS.

NOTES:

1. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE NOTED.
2. THIS DRAWING MUST BE READ IN CONJUNCTION WITH BGC'S REPORT TITLED "RDCK FLOODPLAIN AND STEEP CREEK STUDY BURTON CREEK", AND DATED MARCH 2020.
3. BASE TOPOGRAPHIC DATA BASED ON LIDAR PROVIDED BY RDCK DATED 2017 AND 2018. CONTOUR INTERVAL IS 10 m. IMAGERY FROM GOOGLE EARTH/PARCEL DATA FROM PARCELMAP BC. FLOOD DEPTH BASED ON THE 200-YEAR FLOOD USING THE INSTANTANEOUS PEAK DISCHARGE ADJUSTED FOR CLIMATE CHANGE AND LOWER ARROW LAKE ELEVATION OF 440.70 m.
4. PROJECTION IS NAD 1983 UTM ZONE 11N. VERTICAL DATUM IS CGVD2013.
5. UNLESS BGC AGREES OTHERWISE IN WRITING, THIS DRAWING SHALL NOT BE MODIFIED OR USED FOR ANY PURPOSE OTHER THAN THE PURPOSE FOR WHICH BGC GENERATED IT. BGC SHALL HAVE NO LIABILITY FOR ANY DAMAGES OR LOSS ARISING IN ANY WAY FROM ANY USE OR MODIFICATION OF THIS DOCUMENT NOT AUTHORIZED BY BGC. ANY USE OF OR RELIANCE UPON THIS DOCUMENT OR ITS CONTENT BY THIRD PARTIES SHALL BE AT SUCH THIRD PARTIES' SOLE RISK.


SCALE:	1:5,000
DATE:	MAR 2020
DRAWN:	LL
CHECKED:	PG
APPROVED:	RM

BIGC BGC ENGINEERING INC.
AN APPLIED EARTH SCIENCES COMPANY

CLIENT:

PROJECT: RDCK FLOODPLAIN AND STEEP CREEK STUDY BURTON CREEK	
TITLE: 200-YEAR FLOOD HAZARD (SHEET 3 OF 3)	
PROJECT No.: 0268 007	DWG No: 06

X:\Projects\0268007_RDCK_NDMP_Stream_2_Support\GIS\Production\Report\20191218_RDCK_Clearwater_FCL\200-Year Flood_Hazard_DDP.mxd

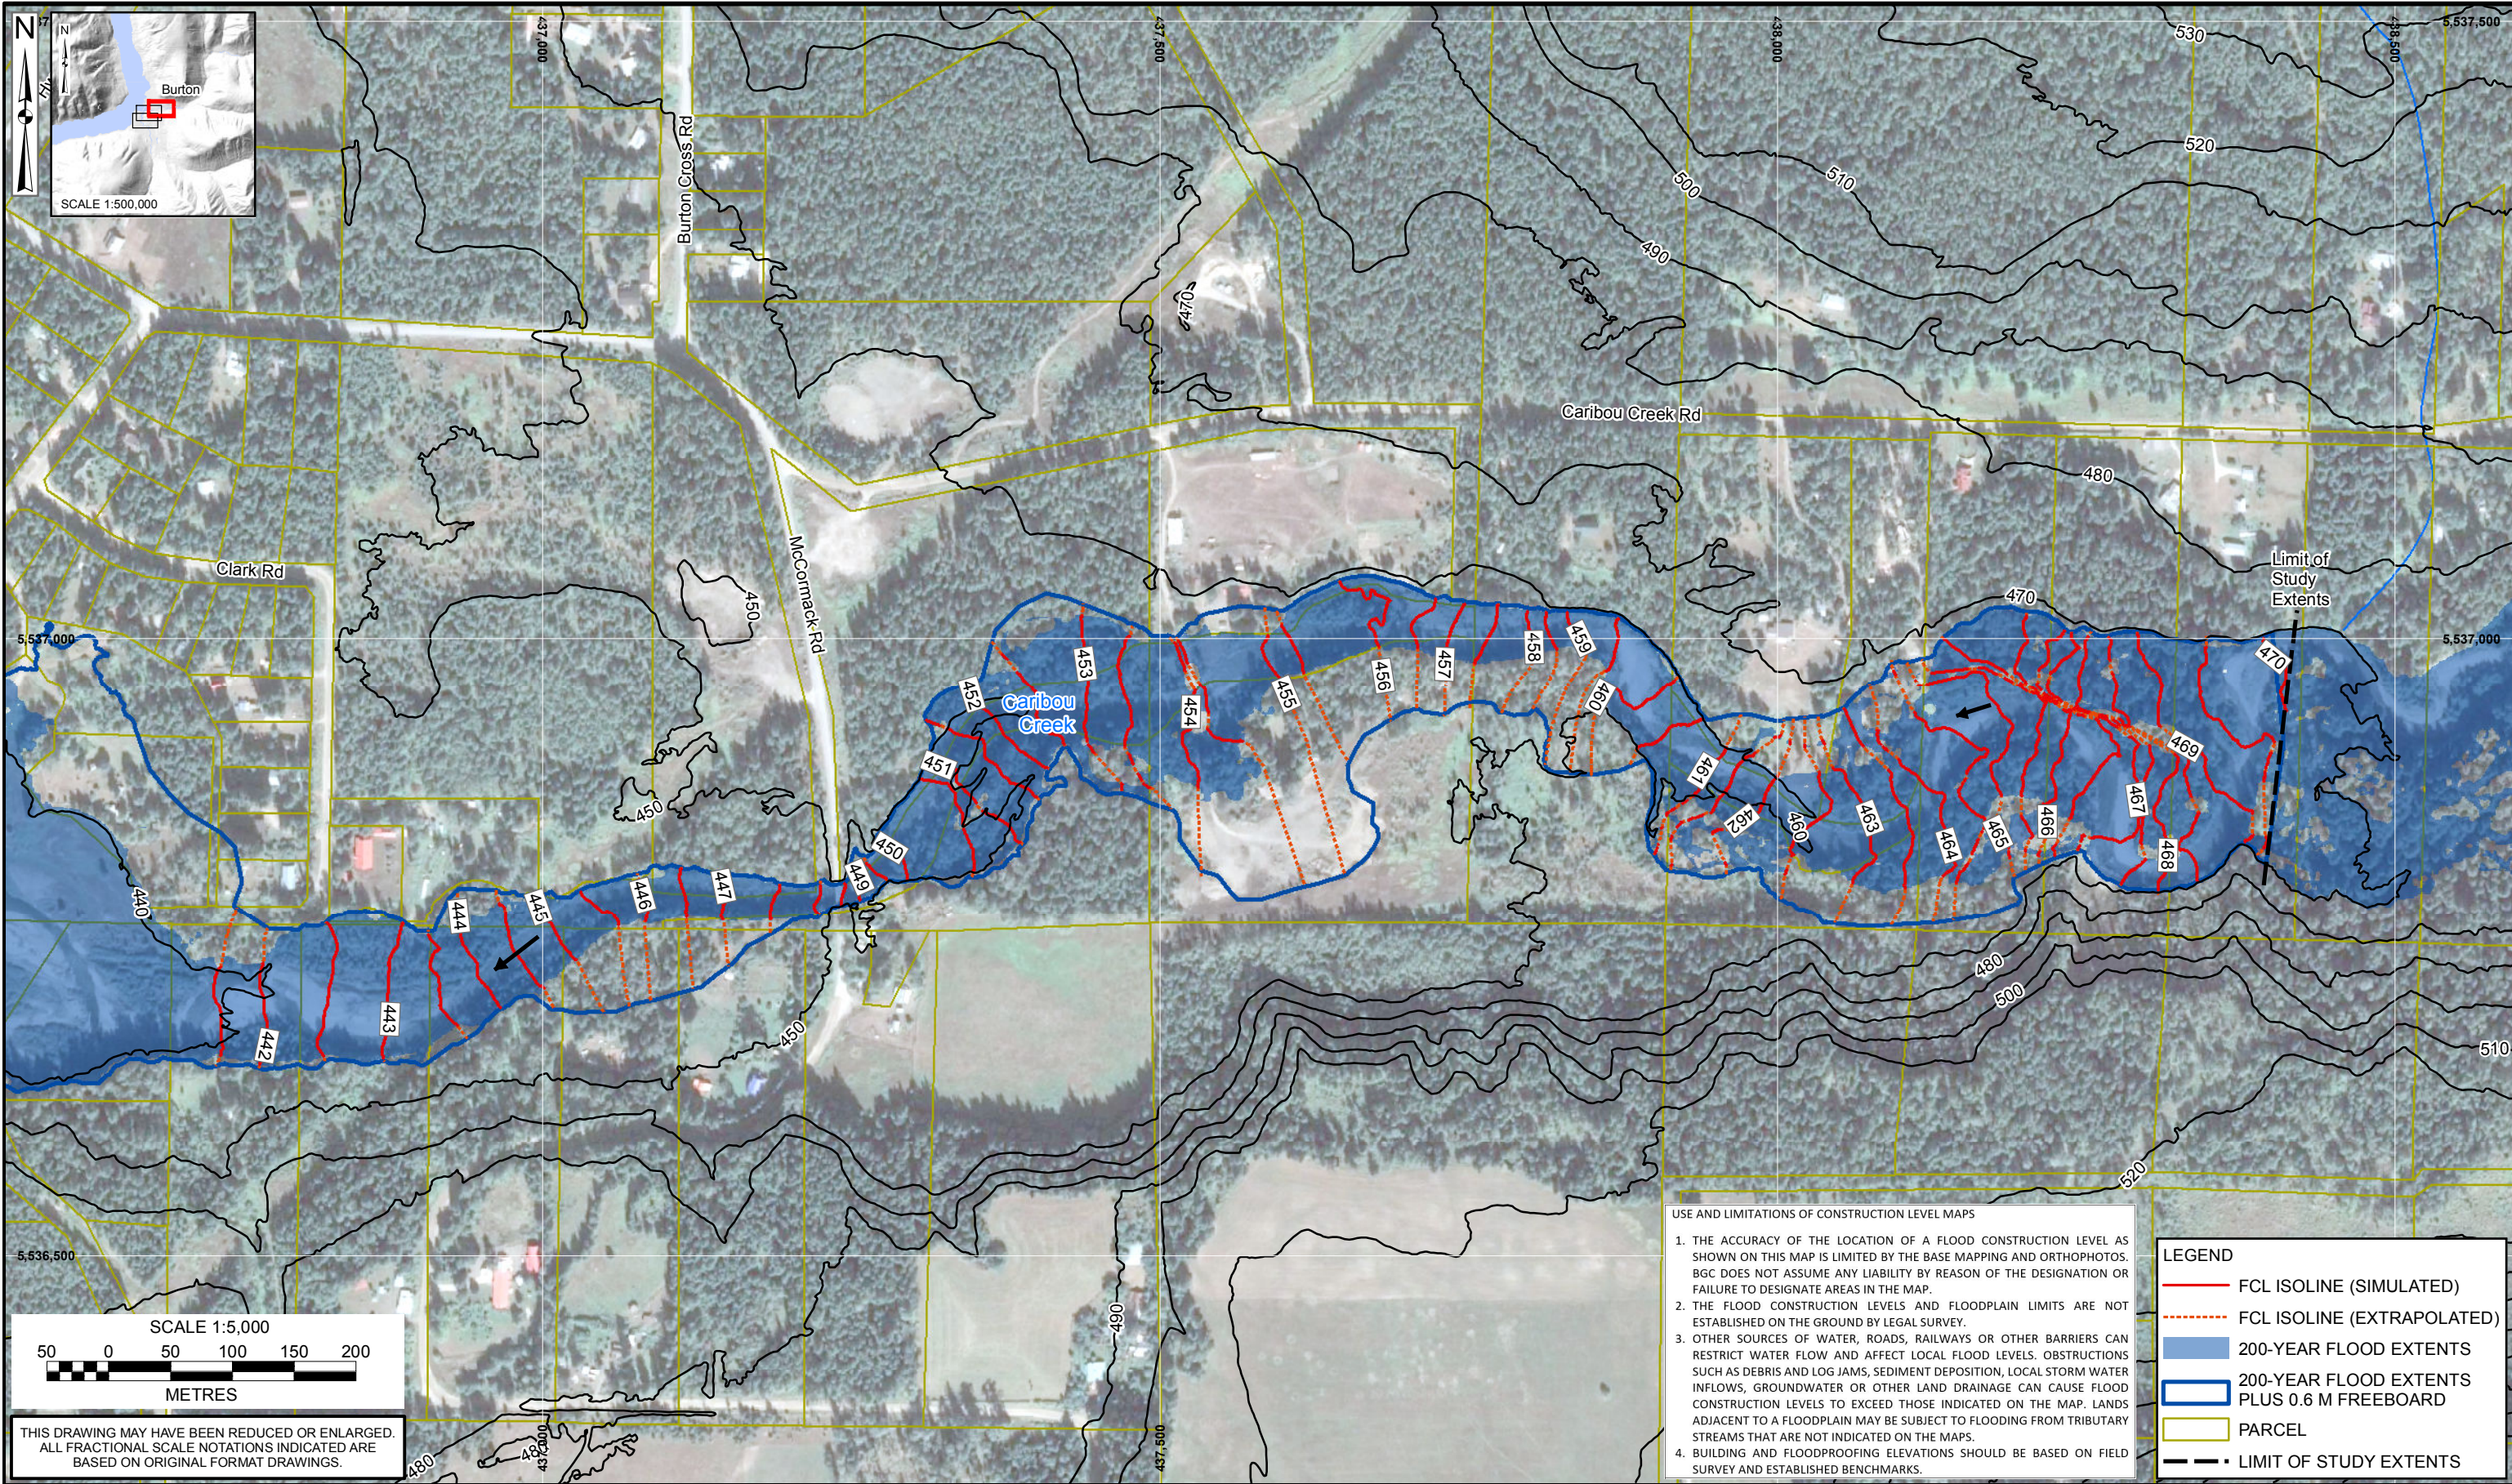

USE AND LIMITATIONS OF CONSTRUCTION LEVEL MAPS

1. THE ACCURACY OF THE LOCATION OF A FLOOD CONSTRUCTION LEVEL AS SHOWN ON THIS MAP IS LIMITED BY THE BASE MAPPING AND ORTHOPHOTOS. BGC DOES NOT ASSUME ANY LIABILITY BY REASON OF THE DESIGNATION OR FAILURE TO DESIGNATE AREAS IN THE MAP.
2. THE FLOOD CONSTRUCTION LEVELS AND FLOODPLAIN LIMITS ARE NOT ESTABLISHED ON THE GROUND BY LEGAL SURVEY.
3. OTHER SOURCES OF WATER, ROADS, RAILWAYS OR OTHER BARRIERS CAN RESTRICT WATER FLOW AND AFFECT LOCAL FLOOD LEVELS. OBSTRUCTIONS SUCH AS DEBRIS AND LOG JAMS, SEDIMENT DEPOSITION, LOCAL STORM WATER INFLOWS, GROUNDWATER OR OTHER LAND DRAINAGE CAN CAUSE FLOOD CONSTRUCTION LEVELS TO EXCEED THOSE INDICATED ON THE MAP. LANDS ADJACENT TO A FLOODPLAIN MAY BE SUBJECT TO FLOODING FROM TRIBUTARY STREAMS THAT ARE NOT INDICATED ON THE MAPS.
4. BUILDING AND FLOODPROOFING ELEVATIONS SHOULD BE BASED ON FIELD SURVEY AND ESTABLISHED BENCHMARKS.

LEGEND


- FCL ISOLINE (SIMULATED)
- - - FCL ISOLINE (EXTRAPOLATED)
- 200-YEAR FLOOD EXTENTS
- 200-YEAR FLOOD EXTENTS PLUS 0.6 M FREEBOARD
- PARCEL
- LIMIT OF STUDY EXTENTS

NOTES:



1. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE NOTED.
2. THIS DRAWING MUST BE READ IN CONJUNCTION WITH BGC'S REPORT TITLED "RDCK FLOODPLAIN AND STEEP CREEK STUDY BURTON CREEK", AND DATED MARCH 2020.
3. BASE TOPOGRAPHIC DATA BASED ON LIDAR PROVIDED BY RDCK DATED 2017 AND 2018. CONTOUR INTERVAL IS 10 m. IMAGERY FROM GOOGLE EARTH. PARCEL DATA FROM PARCELMAP BC. FLOOD CONSTRUCTION LEVEL BASED ON THE WATER SURFACE ELEVATION FROM THE 200-YEAR FLOOD USING THE INSTANTANEOUS PEAK DISCHARGE ADJUSTED FOR CLIMATE CHANGE PLUS 0.6 m FREEBOARD AND LOWER ARROW LAKE ELEVATION OF 440.70 m.
4. PROJECTION IS NAD 1983 UTM ZONE 11N. VERTICAL DATUM IS CGVD2013.
5. UNLESS BGC AGREES OTHERWISE IN WRITING, THIS DRAWING SHALL NOT BE MODIFIED OR USED FOR ANY PURPOSE OTHER THAN THE PURPOSE FOR WHICH BGC GENERATED IT. BGC SHALL HAVE NO LIABILITY FOR ANY DAMAGES OR LOSS ARISING IN ANY WAY FROM ANY USE OR MODIFICATION OF THIS DOCUMENT NOT AUTHORIZED BY BGC. ANY USE OF OR RELIANCE UPON THIS DOCUMENT OR ITS CONTENT BY THIRD PARTIES SHALL BE AT SUCH THIRD PARTIES' SOLE RISK.

SCALE:	1:5,000	<p>BGC ENGINEERING INC. AN APPLIED EARTH SCIENCES COMPANY</p>	PROJECT: RDCK FLOODPLAIN AND STEEP CREEK STUDY BURTON CREEK	
DATE:	MAR 2020		TITLE: 200-YEAR FLOOD CONSTRUCTION LEVEL (SHEET 1 OF 3)	
DRAWN:	LL		PROJECT No.:	0268 007
CHECKED:	PG		DWG No.:	07
APPROVED:	RM			

X:\Projects\0268\007_RDCK_NDMP_Stream_2_Support\GIS\Production\Report\20191218_RDCK_Clearwater_FCL200-Year Flood Construction Limits_DDP.mxd

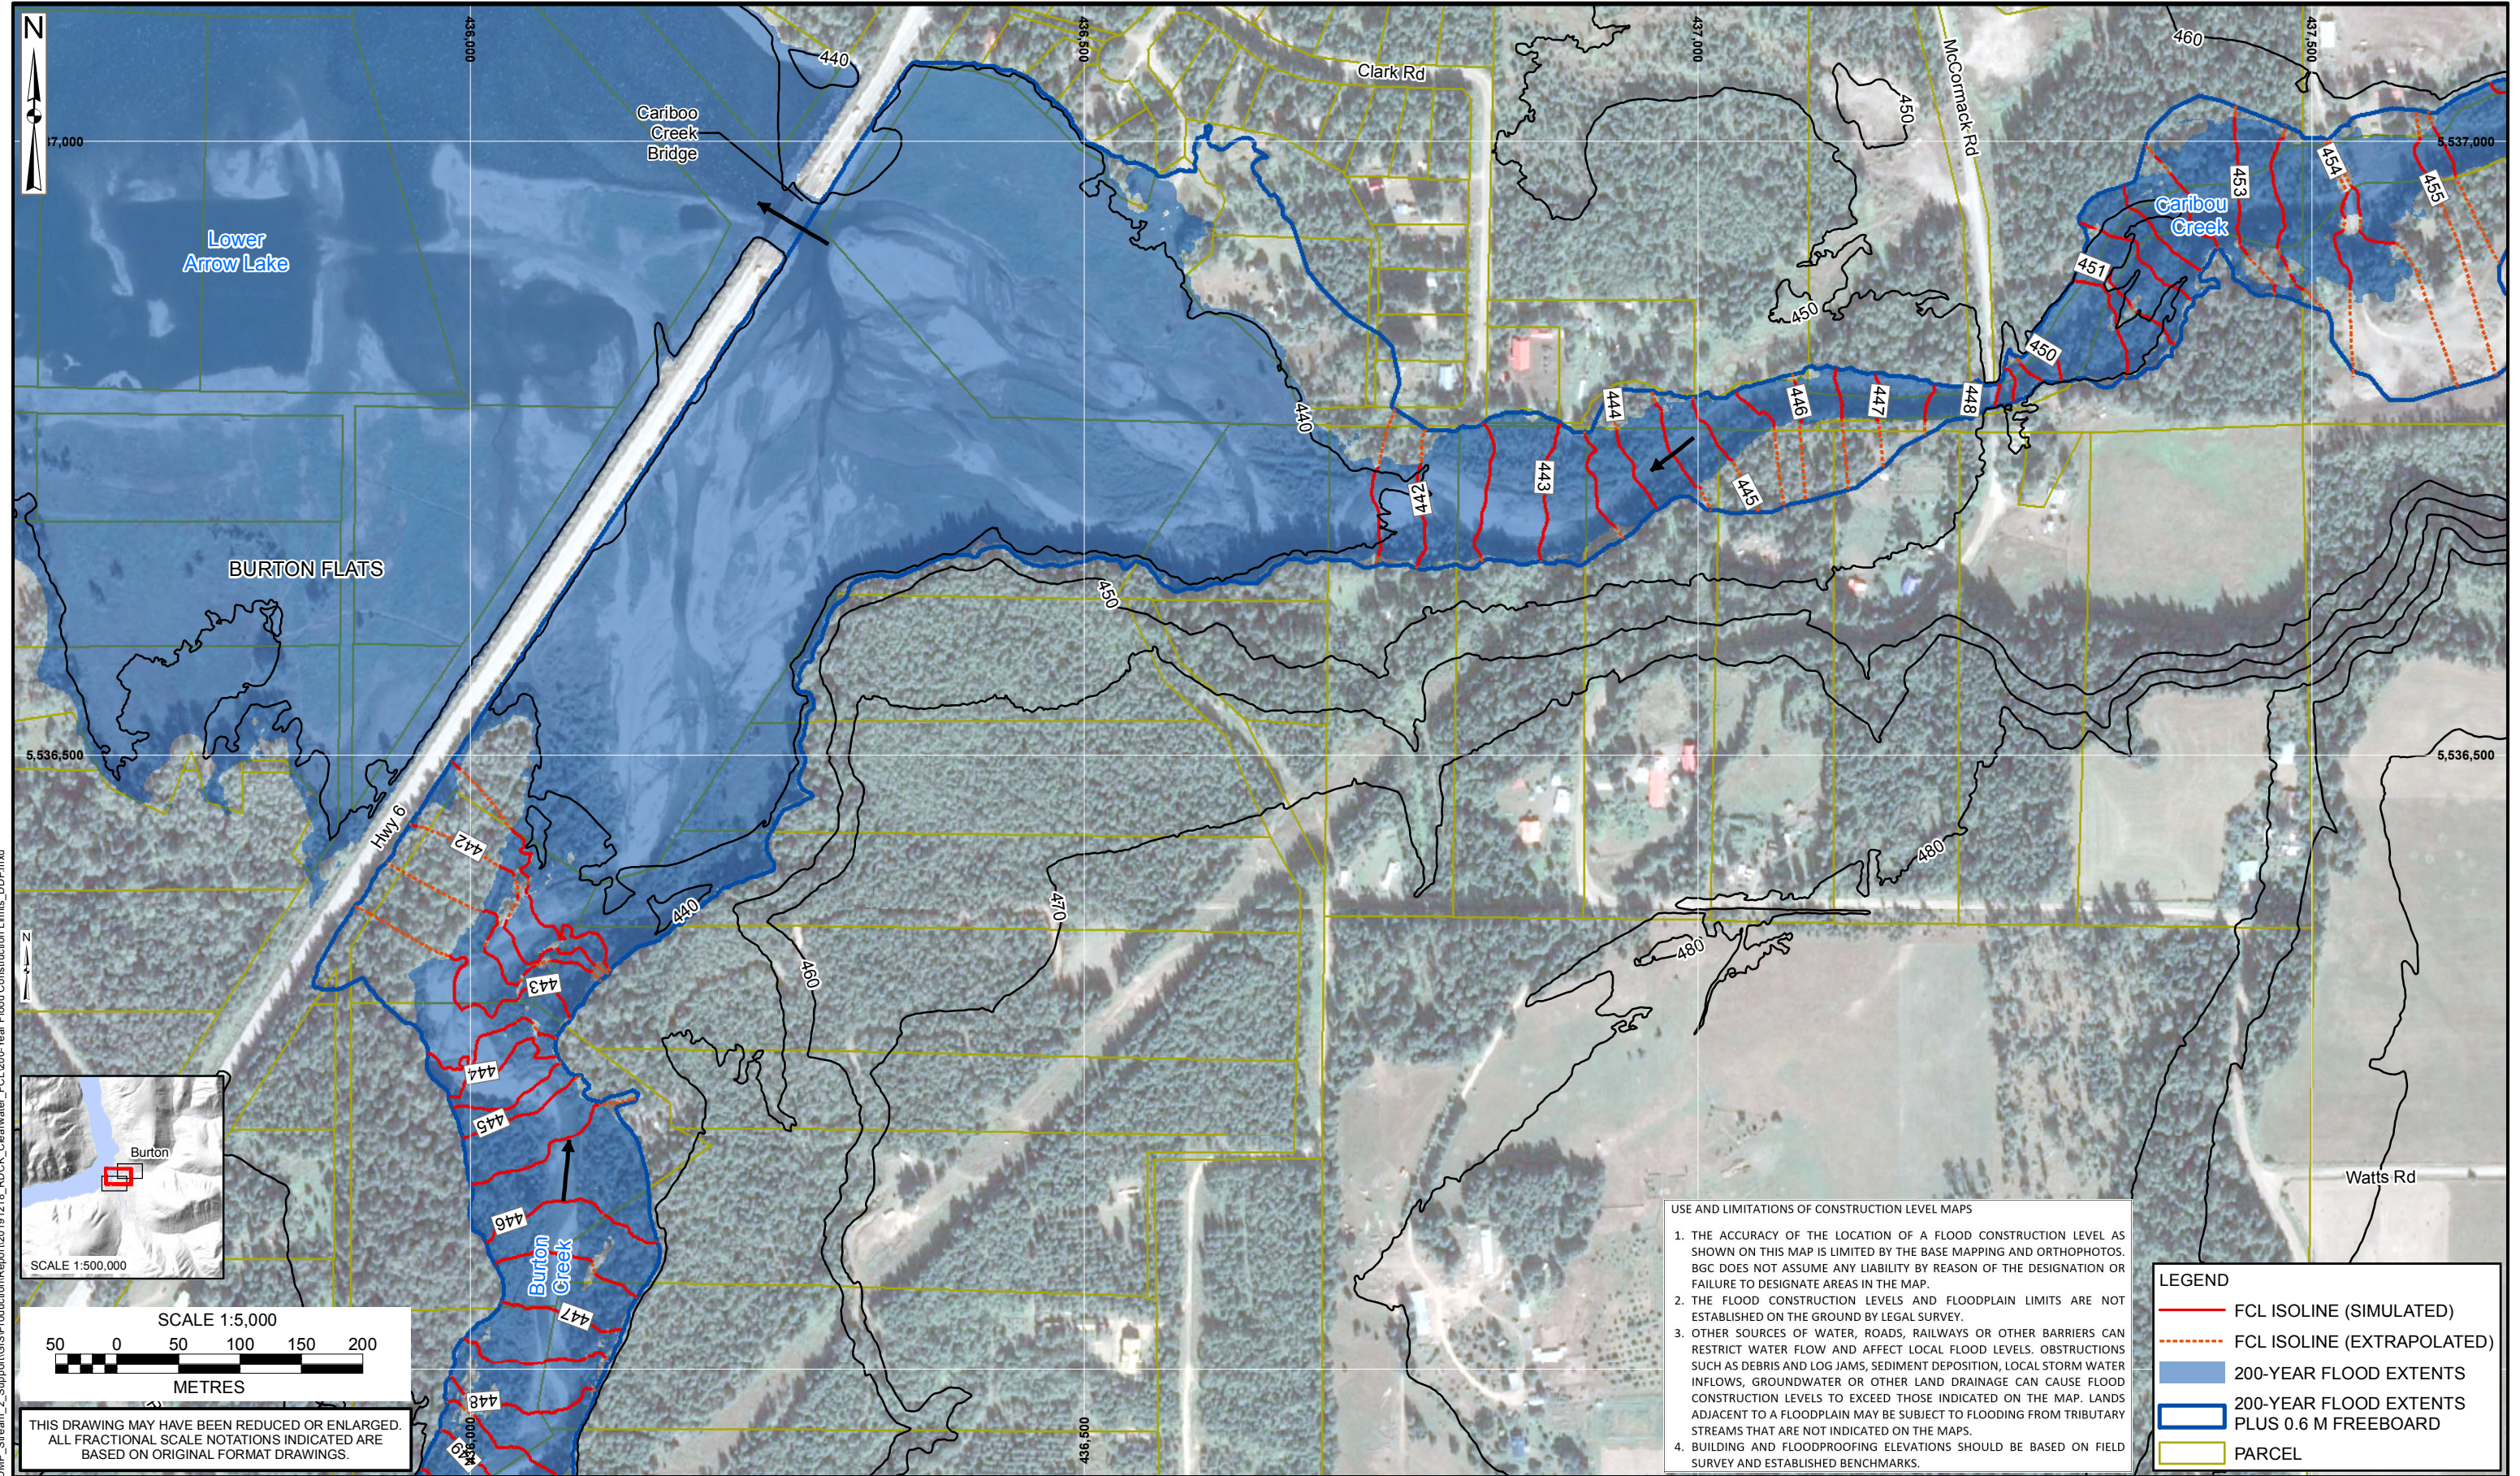

X:\Projects\0268\007_RDCK_NDMP_Stream_2_Support\GIS\Production\Report\20191218_RDCK_Cleanwater_FCL\200-Year Flood Construction Limits_DDP.mxd



THIS DRAWING MAY HAVE BEEN REDUCED OR ENLARGED.
ALL FRACTIONAL SCALE NOTATIONS INDICATED ARE
BASED ON ORIGINAL FORMAT DRAWINGS.

USE AND LIMITATIONS OF CONSTRUCTION LEVEL MAPS

1. THE ACCURACY OF THE LOCATION OF A FLOOD CONSTRUCTION LEVEL AS SHOWN ON THIS MAP IS LIMITED BY THE BASE MAPPING AND ORTHOPHOTOS. BGC DOES NOT ASSUME ANY LIABILITY BY REASON OF THE DESIGNATION OR FAILURE TO DESIGNATE AREAS IN THE MAP.
2. THE FLOOD CONSTRUCTION LEVELS AND FLOODPLAIN LIMITS ARE NOT ESTABLISHED ON THE GROUND BY LEGAL SURVEY.
3. OTHER SOURCES OF WATER, ROADS, RAILWAYS OR OTHER BARRIERS CAN RESTRICT WATER FLOW AND AFFECT LOCAL FLOOD LEVELS. OBSTRUCTIONS SUCH AS DEBRIS AND LOG JAMS, SEDIMENT DEPOSITION, LOCAL STORM WATER INFLOWS, GROUNDWATER OR OTHER LAND DRAINAGE CAN CAUSE FLOOD CONSTRUCTION LEVELS TO EXCEED THOSE INDICATED ON THE MAP. LANDS ADJACENT TO A FLOODPLAIN MAY BE SUBJECT TO FLOODING FROM TRIBUTARY STREAMS THAT ARE NOT INDICATED ON THE MAPS.
4. BUILDING AND FLOODPROOFING ELEVATIONS SHOULD BE BASED ON FIELD SURVEY AND ESTABLISHED BENCHMARKS.

LEGEND	
	FCL ISOLINE (SIMULATED)
	FCL ISOLINE (EXTRAPOLATED)
	200-YEAR FLOOD EXTENTS
	200-YEAR FLOOD EXTENTS PLUS 0.6 M FREEBOARD
	PARCEL


NOTES:

1. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE NOTED.
2. THIS DRAWING MUST BE READ IN CONJUNCTION WITH BGC'S REPORT TITLED "RDCK FLOODPLAIN AND STEEP CREEK STUDY BURTON CREEK", AND DATED MARCH 2020.
3. BASE TOPOGRAPHIC DATA BASED ON LIDAR PROVIDED BY RDCK DATED 2017 AND 2018. CONTOUR INTERVAL IS 10 m. IMAGERY FROM GOOGLE EARTH. PARCEL DATA FROM PARCELMAP BC. FLOOD CONSTRUCTION LEVEL BASED ON THE WATER SURFACE ELEVATION FROM THE 200-YEAR FLOOD USING THE INSTANTANEOUS PEAK DISCHARGE ADJUSTED FOR CLIMATE CHANGE PLUS 0.6 m FREEBOARD AND LOWER ARROW LAKE ELEVATION OF 440.70 m.
4. PROJECTION IS NAD 1983 UTM ZONE 11N. VERTICAL DATUM IS CGVD2013.
5. UNLESS BGC AGREES OTHERWISE IN WRITING, THIS DRAWING SHALL NOT BE MODIFIED OR USED FOR ANY PURPOSE OTHER THAN THE PURPOSE FOR WHICH BGC GENERATED IT. BGC SHALL HAVE NO LIABILITY FOR ANY DAMAGES OR LOSS ARISING IN ANY WAY FROM ANY USE OR MODIFICATION OF THIS DOCUMENT NOT AUTHORIZED BY BGC. ANY USE OF OR RELIANCE UPON THIS DOCUMENT OR ITS CONTENT BY THIRD PARTIES SHALL BE AT SUCH THIRD PARTIES' SOLE RISK.

SCALE:	1:5,000
DATE:	MAR 2020
DRAWN:	LL
CHECKED:	PG
APPROVED:	RM

BGC ENGINEERING INC.
AN APPLIED EARTH SCIENCES COMPANY


PROJECT: RDCK FLOODPLAIN AND STEEP CREEK STUDY BURTON CREEK	
TITLE: 200-YEAR FLOOD CONSTRUCTION LEVEL (SHEET 2 OF 3)	
PROJECT No.:	DWG No.:
0268 007	07

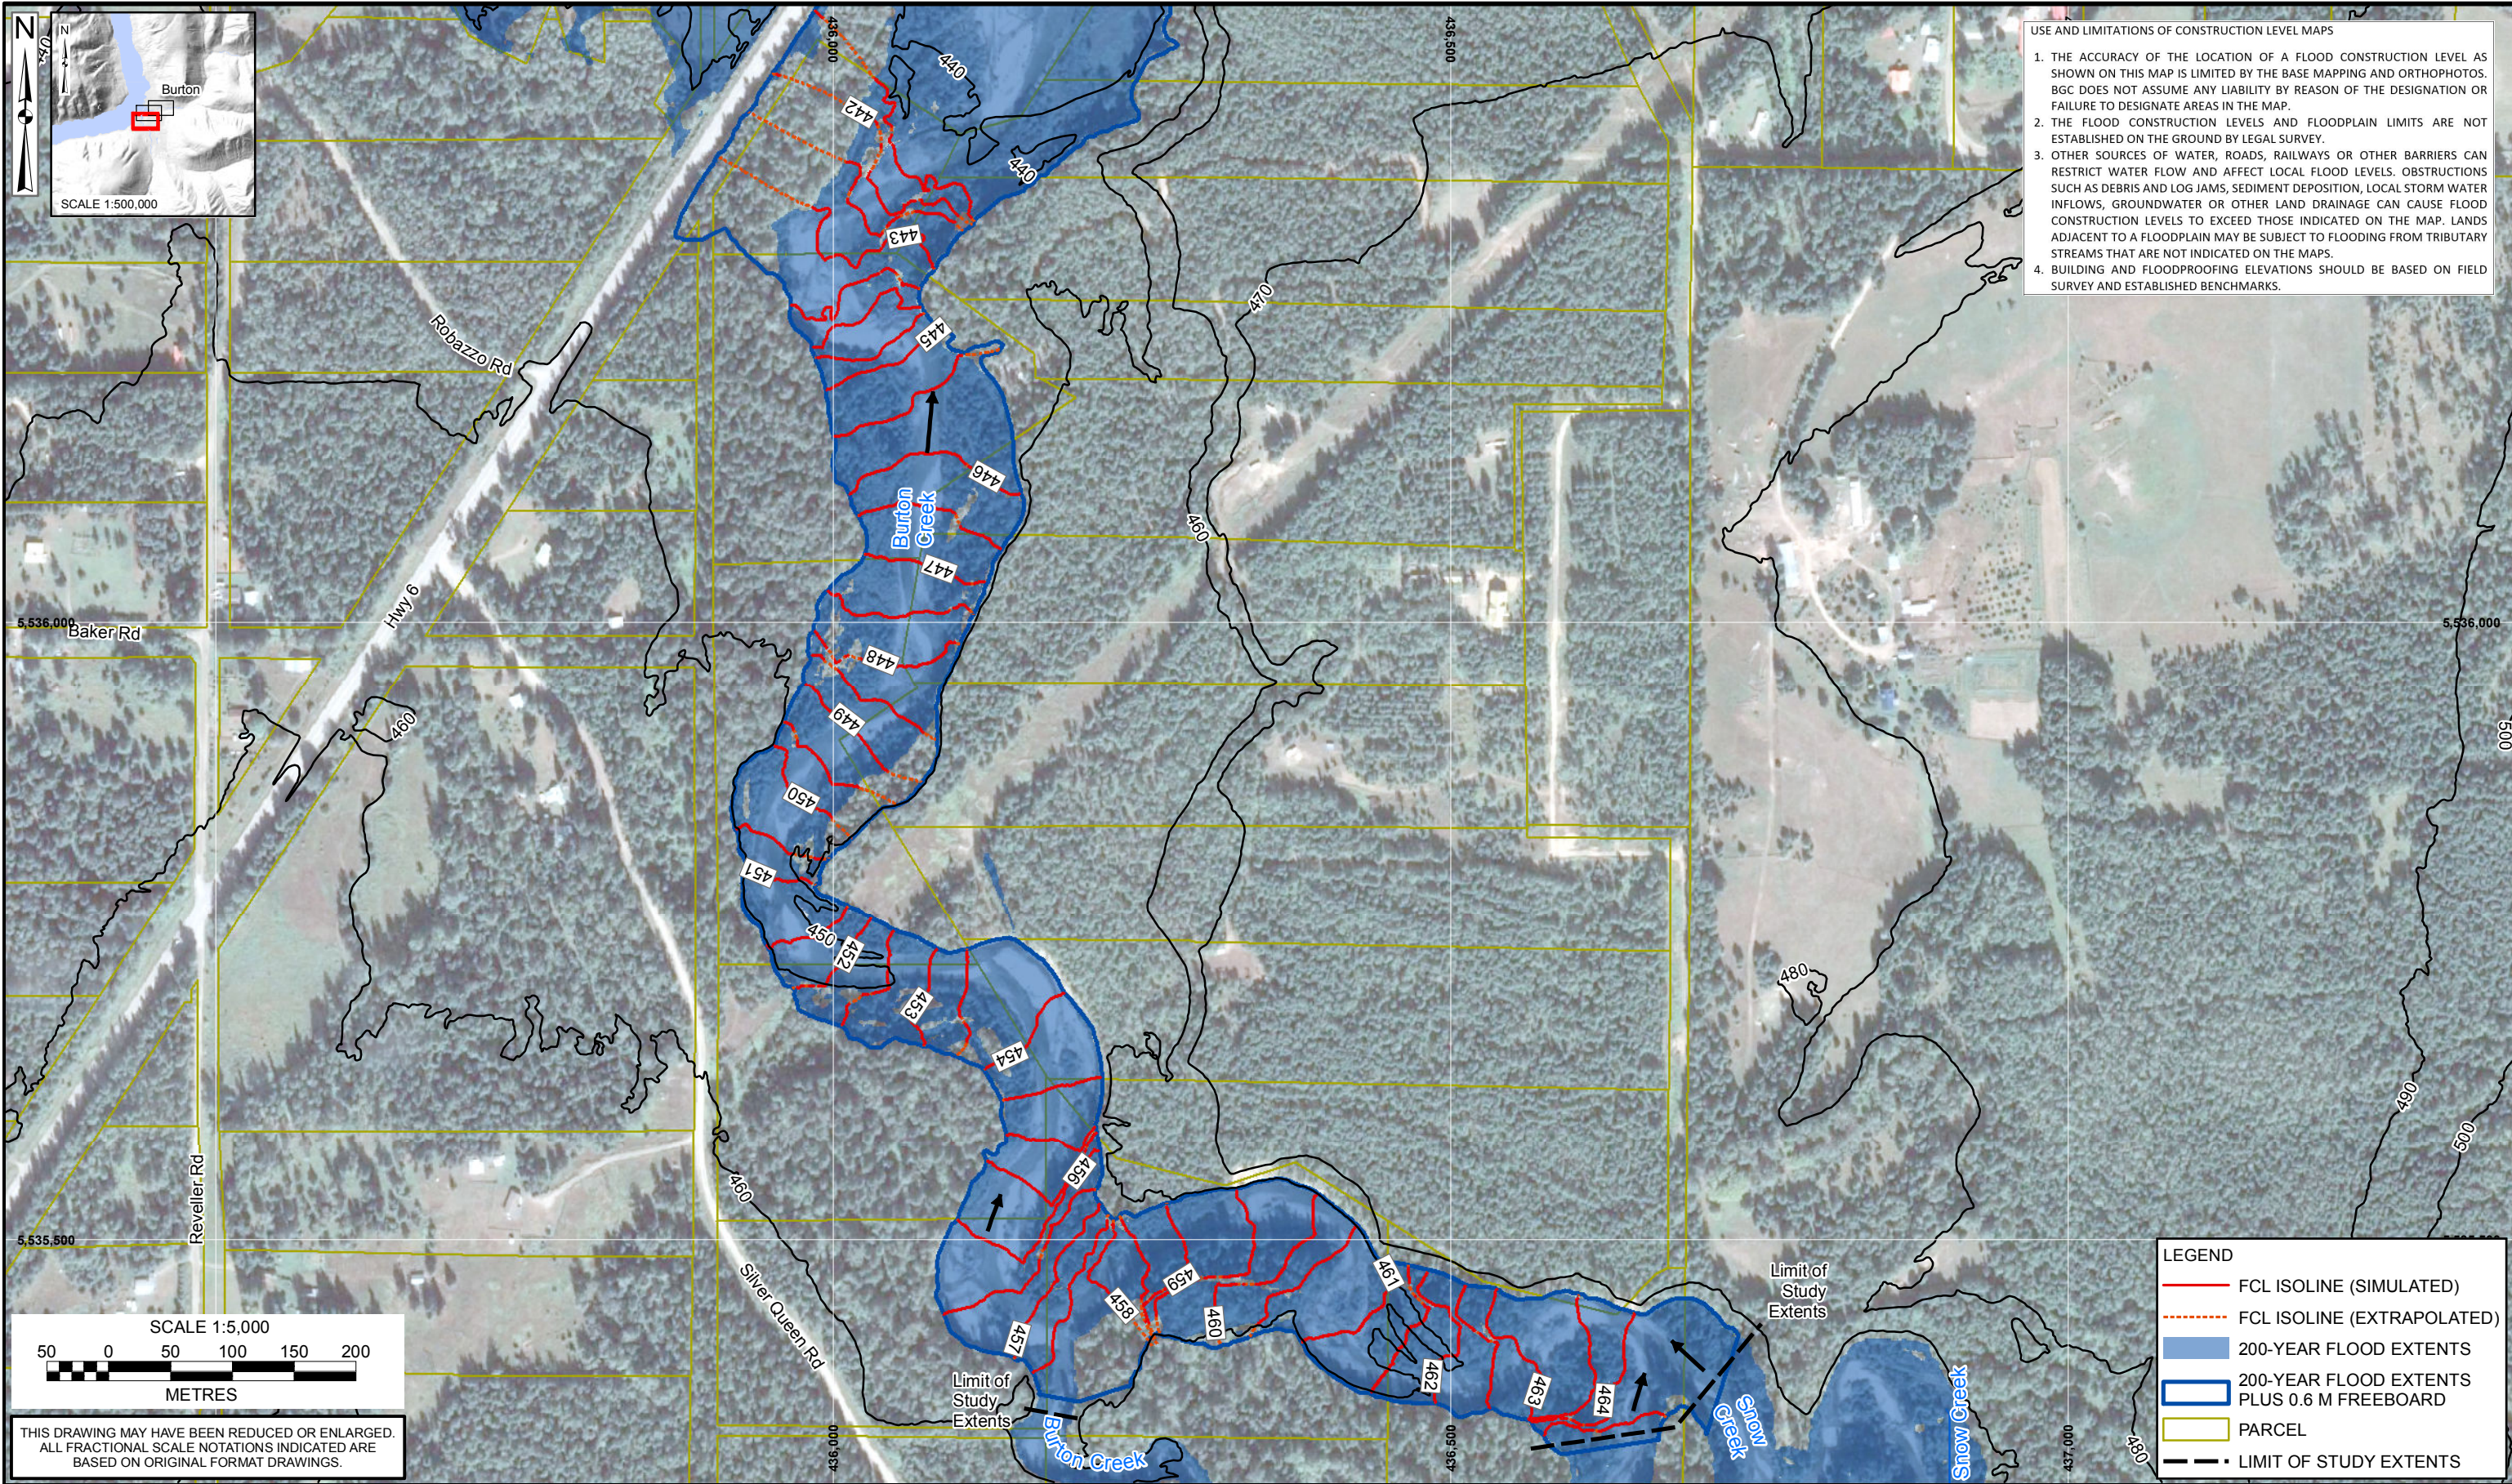

USE AND LIMITATIONS OF CONSTRUCTION LEVEL MAPS

1. THE ACCURACY OF THE LOCATION OF A FLOOD CONSTRUCTION LEVEL AS SHOWN ON THIS MAP IS LIMITED BY THE BASE MAPPING AND ORTHOPHOTOS. BGC DOES NOT ASSUME ANY LIABILITY BY REASON OF THE DESIGNATION OR FAILURE TO DESIGNATE AREAS IN THE MAP.
2. THE FLOOD CONSTRUCTION LEVELS AND FLOODPLAIN LIMITS ARE NOT ESTABLISHED ON THE GROUND BY LEGAL SURVEY.
3. OTHER SOURCES OF WATER, ROADS, RAILWAYS OR OTHER BARRIERS CAN RESTRICT WATER FLOW AND AFFECT LOCAL FLOOD LEVELS. OBSTRUCTIONS SUCH AS DEBRIS AND LOG JAMS, SEDIMENT DEPOSITION, LOCAL STORM WATER INFLOWS, GROUNDWATER OR OTHER LAND DRAINAGE CAN CAUSE FLOOD CONSTRUCTION LEVELS TO EXCEED THOSE INDICATED ON THE MAP. LANDS ADJACENT TO A FLOODPLAIN MAY BE SUBJECT TO FLOODING FROM TRIBUTARY STREAMS THAT ARE NOT INDICATED ON THE MAPS.
4. BUILDING AND FLOODPROOFING ELEVATIONS SHOULD BE BASED ON FIELD SURVEY AND ESTABLISHED BENCHMARKS.

X:\Projects\0268\007_RDCK_NDMP_Stream_2_Support\GIS\Production\Report\20191218_RDCK_Cleanwater_FCL\200-Year Flood Construction Limits_DDP.mxd



THIS DRAWING MAY HAVE BEEN REDUCED OR ENLARGED. ALL FRACTIONAL SCALE NOTATIONS INDICATED ARE BASED ON ORIGINAL FORMAT DRAWINGS.

NOTES:

1. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE NOTED.
2. THIS DRAWING MUST BE READ IN CONJUNCTION WITH BGC'S REPORT TITLED "RDCK FLOODPLAIN AND STEEP CREEK STUDY BURTON CREEK", AND DATED MARCH 2020.
3. BASE TOPOGRAPHIC DATA BASED ON LIDAR PROVIDED BY RDCK DATED 2017 AND 2018. CONTOUR INTERVAL IS 10 m. IMAGERY FROM GOOGLE EARTH. PARCEL DATA FROM PARCELMAP BC. FLOOD CONSTRUCTION LEVEL BASED ON THE WATER SURFACE ELEVATION FROM THE 200-YEAR FLOOD USING THE INSTANTANEOUS PEAK DISCHARGE ADJUSTED FOR CLIMATE CHANGE PLUS 0.6 m FREEBOARD AND LOWER LAKE ELEVATION OF 440.70 m.
4. PROJECTION IS NAD 1983 UTM ZONE 11N. VERTICAL DATUM IS CGVD2013.
5. UNLESS BGC AGREES OTHERWISE IN WRITING, THIS DRAWING SHALL NOT BE MODIFIED OR USED FOR ANY PURPOSE OTHER THAN THE PURPOSE FOR WHICH BGC GENERATED IT. BGC SHALL HAVE NO LIABILITY FOR ANY DAMAGES OR LOSS ARISING IN ANY WAY FROM ANY USE OR MODIFICATION OF THIS DOCUMENT NOT AUTHORIZED BY BGC. ANY USE OF OR RELIANCE UPON THIS DOCUMENT OR ITS CONTENT BY THIRD PARTIES SHALL BE AT SUCH THIRD PARTIES' SOLE RISK.

SCALE: 1:5,000
 DATE: MAR 2020
 DRAWN: LL
 CHECKED: PG
 APPROVED: RM

BGC ENGINEERING INC.
 AN APPLIED EARTH SCIENCES COMPANY

CLIENT:

PROJECT: RDCK FLOODPLAIN AND STEEP CREEK STUDY BURTON CREEK
 TITLE: 200-YEAR FLOOD CONSTRUCTION LEVEL (SHEET 3 OF 3)
 PROJECT No.: 0268 007
 DWG No.: 07